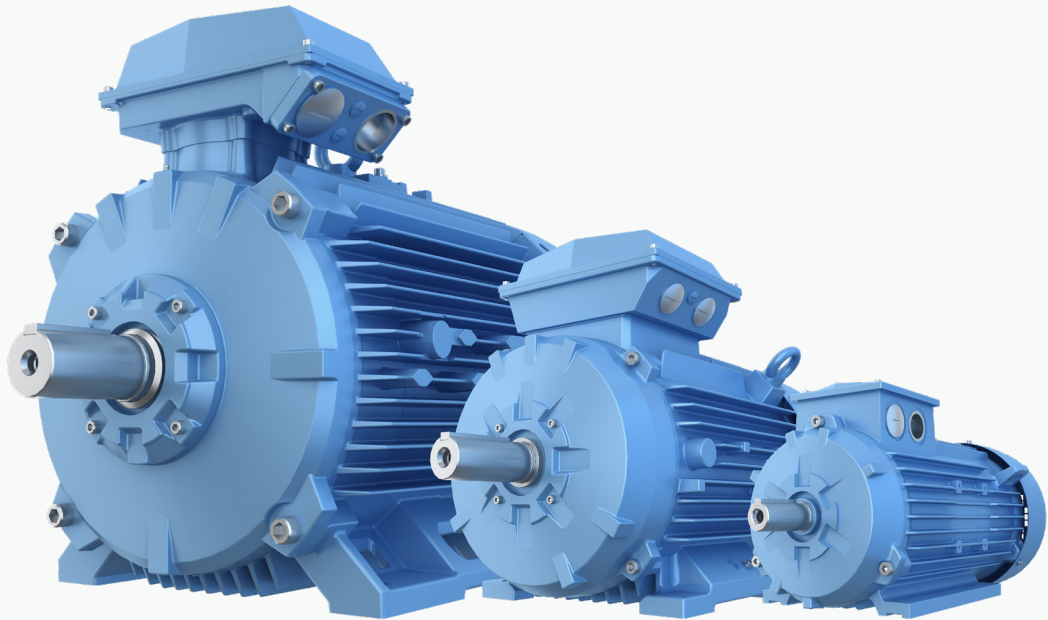


目录 2026-04 | Catalog April 2026

# M2QA低压通用型三相异步电机

## M2QA - Low Voltage General Purpose Three-phase Asynchronous Motors





# 目录

## Content

04	产品概述	04	General information
07	订购信息	07	Ordering information
08	铭牌	08	Rating plates
09	电气特性	09	Electrical design
12	机械设计	12	Mechanical design
22	变频器驱动	22	Variable speed drives
28	技术数据 IE5	28	Technical data IE5
32	技术数据 IE4	32	Technical data IE4
36	技术数据 IE3	36	Technical data IE3
40	技术数据 IE2	40	Technical data IE2
43	技术数据 10P	43	Technical data 10P
44	技术数据 12P	44	Technical data 12P
45	外形图及外形尺寸	45	Dimension drawings
54	变量代码	54	Variant codes
60	通用型电机简介	60	General purpose motors in brief

ABB 低压电机拥有了 ABB 的一流品质和雄厚支持，这些电机的性能得到大量客户和 OEM（原始设备制造商）的认可。

ABB Low voltage motors are with ABB quality and support. These motors have the features appreciated by volume customers and serial OEMs.


# 产品概述

## General information

### 标准

ABB 电机采用全封闭三相鼠笼型设计，其设计符合 IEC 国际标准以及中国 GB 标准，效率最高可达到国标 1 级能效等级（GB18613-2020），相当于 IEC 的 IE5 效率水平。

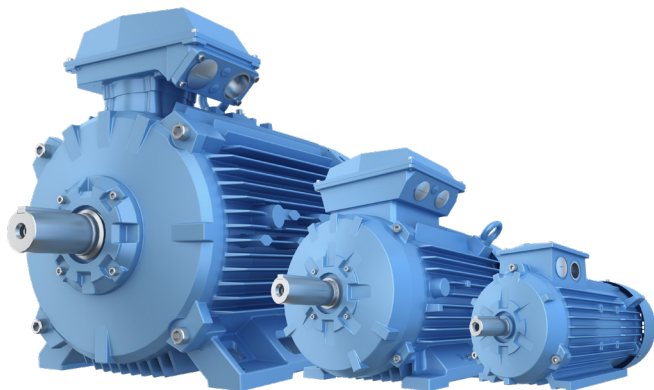ABB 工厂通过 ISO9001 国际质量认证及 ISO14000 环境标准。



### 产品简介

M2QA 是 ABB 针对中高端市场研发的一款通用型三相异步低压电机产品，其效率水平最高可达到中国国标 1 级效率等级（GB18613-2020），产品采用了 ABB 全球统一设计平台，作为一款外型美观且性能稳定可靠的电机，它拥有非常出色的机械和电气性能，并满足客户定制化设计需求，广泛应用于各种应用领域。

### 适用行业

M2QA 系列电机覆盖造纸、冶金、矿山、起重、电力、轨交、船舶、橡塑、纺织、印刷包装、食品饮料、化工、水和污水处理、暖通等行业的配套机械设备需求。

### Standards

ABB motors are of the totally enclosed, three phase squirrel cage type, built to comply with international IEC and China GB standards. Its maximum efficiency can reach the GB Grade 1 level (GB18613-2020), which is equivalent to the IE5 efficiency level of IEC.

ABB production units are certified to ISO 9001 international quality standard as well ISO 14000 environmental standards.

### IEC/EN

电气 Electrical	机械 Mechanical
IEC/EN 60034-1	IEC 60072
IEC/EN 60034-2-1	IEC/EN 60034-5
IEC/EN 60034-30	IEC/EN 60034-6
IEC/EN 60034-8	IEC/EN 60034-7
IEC/EN 60034-12	IEC/EN 60034-8
	IEC 60034-14

### GB

电气 Electrical	机械 Mechanical
GB/T 755	GB/T 4772.1
GB/T 1032	GB/T 4942.1
GB 18613	GB/T 1993
GB/T 1971	GB/T 997
GB/T 21210	GB/T 1971
	GB/T 10068

### Brief

M2QA is a General Purpose three-phase asynchronous Low-voltage motor product developed by ABB for the mid-to-high-end market, and its maximum efficiency can reach China's GB Grade 1(GB18613-2020) and utilizes ABB's global unified design platform. With its stable and reliable performance, excellent mechanical and electrical properties, and ability to meet customized design needs, this motor is widely utilized in various applications.

### Target industry

M2QA series motors suitable for P&P, Metals, Mining, Hoisting, Power, Railway, Marine, Rubber and Plastic, Textile, Printing and Packaging, Food and Beverage, Chemical, W&WW, HVAC and other industries and supporting machinery and equipment needs.

# 产品概述 - 安装结构形式

## General information - Mounting arrangements







### 底脚安装型电机

#### Foot-mounted motor

代码 I / 代码 II  
Code I / code II

产品代码位置 12

Product code pos. 12

						M000007
IM B3	IM V5	IM V6	IM B6	IM B7	IM B8	
IM 1001	IM 1011	IM 1031	IM 1051	IM 1061	IM 1071	

A = 底脚安装型, 接线盒在顶部  
foot-mounted, term.box top







### 凸缘安装型电机, 大凸缘

#### Flange-mounted motor, large flange

代码 I / 代码 II  
Code I / code II

产品代码位置 12

Product code pos. 12

						M000008
IM B5	IM V1	IM V3	*)	*)	*)	
IM 3001	IM 3011	IM 3031	IM 3051	IM 3061	IM 3071	

B = 凸缘安装型, 大凸缘  
flange mounted, large flange







### 凸缘安装型电机, 小凸缘

#### Flange-mounted motor, small flange

代码 I / 代码 II  
Code I / code II

变量代码

Variant code

						M000009
IM B14	IM V18	IM V19	*)	*)	*)	
IM 3601	IM 3611	IM 3631	IM 3651	IM 3661	IM 3671	

047 = B5 派生出 B14  
B14 from B5







### 底脚和凸缘安装型电机, 大凸缘

#### Foot- and flange-mounted motor with feet, large flange

代码 I / 代码 II  
Code I / code II

变量代码

Variant code

						M000010
IM B35	IM V15	IM V35	*)	*)	*)	
IM 2001	IM 2011	IM 2031	IM 2051	IM 2061	IM 2071	

009 = B3 派生出 B35  
B35 from B3







### 底脚和凸缘安装型电机, 小凸缘

#### Foot- and flange-mounted motor with feet, small flange

代码 I / 代码 II  
Code I / code II

变量代码

Variant code

						M000011
IM B34	IM V17	IM 2131	IM 2151	IM 2161	IM 2171	
IM 2101	IM 2111	IM 2131	IM 2151	IM 2161	IM 2171	

008 = B3 派生出 B34  
B34 from B3

\*) Not Stated in IEC 60034-7.  
IEC 60034-7 无规定

# 产品概述 - 防护等级: IP 代码 / IK 代码

## General information - Degrees of protection: IP code/IK code

按旋转电机外壳提供的防护等级分类符合

- 对于 IP 代码, 适用 IEC 60034-5
- 对于 IK 代码, 适用 EN 50102

### IP 防护

防止人员接触（或接近）带电部件，以及机壳内的运转部件。同时避免外界固体异物侵入机器内，保护机器，避免进水防止受到有害影响。

### IK 代码

机壳保护电机不受外部机械冲击不利影响的程度分级。

Classification of degrees of protection provided by enclosures of rotating machines refers to:

- Standard IEC 60034-5 for IP code
- Standard EN 50102 for IK code

### IP protection

Protection of persons against getting in contact with (or approaching) live parts and against contact with moving parts inside the enclosure. Also protection of the machine against ingress of solid foreign objects. Protection of machines against the harmful effects due to the ingress of water.

### IK code

Classification of degrees of protection provided by enclosure for motors against external mechanical impacts.

### IP 代码说明

#### Explanation of the IP code

特征字母 Ingress protection	对人和机壳内电机部件的保护程度 Degree of protection to persons and to parts of the motors inside the enclosure	机壳防止机器进水，遭受有害影响的防水程度 Degree of protection provided by the enclosure with respect to harmful effects due to ingress of water
IP	5	5
	1	2

#### 位置1

##### Position 1

- 2: 防止大于 12mm 的固体进入机壳  
Motors protected against solid objects greater than 12 mm
- 4: 防止大于 1mm 的固体进入机壳  
Motors protected against solid objects greater than 1 mm
- 5: 防尘保护电机  
Dust-protected motors
- 6: 隔尘电机  
Dust-tight motors

#### 位置2

##### Position 2

- 3: 使电机被溅水后不受损害  
Motors protected against spraying water
- 4: 使电机被淋水后不受损害  
Motors protected against splashing water
- 5: 使电机被喷水后不受损害  
Motors protected against water jets
- 6: 使电机遭大浪后不受损害  
Motors protected against heavy seas

### IK 代码说明

#### Explanation of the IK code

国际机械保护 International mechanical protection	特征组 Characteristic group
IK	08
	1

#### 位置1

##### Position 1

#### IK代码和冲击能量之间的关系:

##### Relation between IK code and impact energy:

IK代码 IK code	冲击能量焦耳 Impact energy/Joule
0:	不按照EN 50102提供保护 Not protected according to EN 50102
01:	0.15
02:	0.2
03:	0.35
04:	0.5
05:	0.7
06:	1
07:	2
08:	5 (ABB 标准) 5 (ABB Standard)
09:	10
10:	20

# 订购信息

## Ordering information

订购时，请按照示例在订单中说明以下最小数据。电机产品代码根据以下示例编写。

When placing an order, please state the following minimum data in the order, as in the example. The product code of the motor is composed in accordance with the following example.

示例	
电机型号	M2QA 180MLA 4
极数	4
安装方式 (IM 代码)	IM B3 (IM1001)
额定输出	22 kW
产品代码	3GQA 182 410-ADF
附加代码 (如需)	

Example	
Motor type	M2QA 180MLA 4
Pole number	4
Mounting arrangement (IM-code)	IM B3 (IM1001)
Rated output	22 kW
Product code	3GQA 182 410-ADF
Variant codes if needed	

### 产品代码说明

#### Explanation of the product code

电机型号 Motor type	电机尺寸 Motor size	产品代码 Product code	安装方式代码, 电压及频率代码, 产品族代码 Mounting arrangement, voltage and frequency code, generation codes	变量代码 Variant codes
<b>M2QA</b>	<b>180MLA</b>	<b>3GQA 182 410- ADF</b>		<b>002, etc</b>
		1 2 3 4 5 6 7 8 9 10 11 12 13 14		

#### 位置 1-4

3GQA = 全封闭铸铁机座电机

#### 位置 5-6

IEC 机座

07 = 71	11 = 112	20 = 200	31 = 315
08 = 80	13 = 132	22 = 225	35 = 355
09 = 90	16 = 160	25 = 250	
10 = 100	18 = 180	28 = 280	

#### 位置 7

极对数

1=2 极	4=8 极
2=4 极	5=10 极
3=6 极	6=12 极

#### 位置 8 -10

序列号

#### 位置 11

-( 破折号 )

#### 位置 12

安装方式

A = 底脚安装型电机  
B = 凸缘安装型电机带通孔的大凸缘

#### 位置 13

电压和频率

D 660 VY, 380 VΔ 50Hz, 440 VΔ 60 Hz  
S 380 VY, 220 VΔ 50Hz, 440 VY 60 Hz

#### 位置 14

产品族代码

#### Positions 1 to 4

3GQA = Totally enclosed motor with cast iron frame

#### Positions 5 to 6

IEC size

07 = 71	11 = 112	20 = 200	31 = 315
08 = 80	13 = 132	22 = 225	35 = 355
09 = 90	16 = 160	25 = 250	
10 = 100	18 = 180	28 = 280	

#### Positions 7

Speed (pole pairs)

1=2 poles	4=8 poles
2=4 poles	5=10 poles
3=6 poles	6=12 poles

#### Positions 8 to 10

Serial number

#### Positions 11

-(dash)

#### Position 12

Mounting arrangement

A = Foot-mounted motor  
B = Flange-mounted motor. Large flange with clearance holes

#### Position 13

Voltage and frequency

D 660 VY, 380 VΔ 50Hz, 440 VΔ 60 Hz  
S 380 VY, 220 VΔ 50Hz, 440 VY 60 Hz

#### Position 14

Generation code

# 铭牌

## Rating plates

铭牌以表格形式提供三个电压的转速、电流和功率因数的数值。

The rating plates are in table form giving values for speed current and power factor for three voltages.

### IE5 铭牌示例

#### IE5 rating plate sample

ABB		ABB Shanghai Motors Co., Ltd Shanghai 200245 P.R. of China					
<b>IE5</b>		IEC60034-1					
3- Motor	GB1 M2QA 180MLA 2 IMB3/IM1001	2026					
505025135-2900							
No. 3G1C26170000097001							
		Ins. cl. F IP 55					
V	Hz	kW	r/min	A	cos φ	Duty	
660	Y	50	22	2975	23	0.88	S1
380	D	50	22	2975	39.9	0.88	S1
440	D	60	22	3578	35	0.87	S1
IE5-50Hz-95.1%(100%)							
Product code 3GQA181410-ADP							
6310-2Z/C3		6210-2Z/C3		263 kg			

### IE4 铭牌示例

#### IE4 rating plate sample

ABB		ABB Shanghai Motors Co., Ltd Shanghai 200245 P.R. of China					
<b>IE4</b>		IEC60034-1					
3- Motor	IE4 M2QA 90SLA 2 IMB3/IM1001	2026					
505025135-100							
No. 3G1C26170000070001							
		Ins. cl. F IP 55					
V	Hz	kW	r/min	A	cos φ	Duty	
380	Y	50	2.2	2870	4.3	0.87	S1
220	D	50	2.2	2870	7.5	0.87	S1
440	Y	60	2.2	3483	3.8	0.85	S1
IE4-50Hz-88.0%(100%)							
Product code 3GQA091010-ASN							
6205-2Z/C3		6205-2Z/C3		33 kg			

#### 说明:

铭牌图片仅供格式参考，最终数据以实际铭牌为准。

#### Remark:

The format of the rating plate is for reference only. The final figure will be subject to the actual rating plate.

# 电气特性

## Electrical design

### 额定输出

M2QA 系列电机的额定功率是指电机运行在 S1- 连续工作制的情况下 (IEC 60034-1)，此时周围环境温度范围为  $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$ ，海拔高度不超过 1000m。

### 电压、频率

IEC 60034-1 定义了电压和频率的波动对温升的影响。标准将电压和频率的综合变化分为 A 和 B 两个区域。区域 A 是电压偏差  $\pm 5\%$  和频率偏差  $\pm 2\%$  的情况；区域 B 是电压偏差  $\pm 10\%$  和频率偏差  $+3\%/-5\%$  的情况。

电机均能在 A 和 B 两区域内提供额定转矩，但温升会高于在额定电压和频率情况下的值。电机只允许在区域 B 中短时间运行。

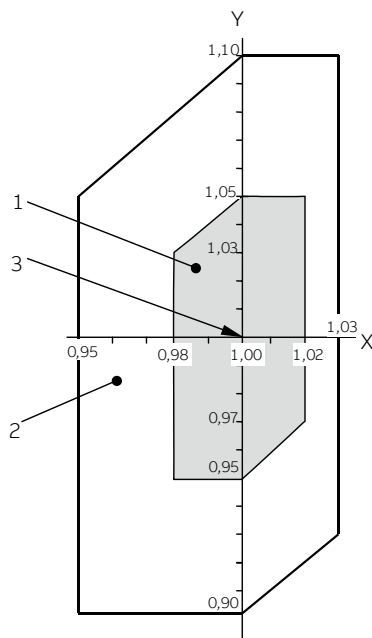
### Rated Output

M2QA motors rated outputs means that the motor runs under continuous duty S1 (IEC 60034-1) operation at ambient temperature from  $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$  and at altitudes of up to 1000 m above sea level.

### Voltage and Frequency

The impact on temperature rise caused by voltage and frequency fluctuation is defined in IEC 60034-1. The standard divides the combinations into two zones, zone A and B. Zone A is the combination of voltage deviation  $\pm 5\%$  and frequency deviation  $\pm 2\%$ . Zone B is the combination of voltage deviation  $\pm 10\%$  and frequency deviation  $+3\%/-5\%$ .

The motors are capable of supplying the rated torque in both zone A and B, but the temperature rise will be higher than at rated voltage and frequency. The motors are to be in operation only for a short period of time in zone B.



X 轴 频率标么值

Y 轴 电压标么值

1 区域 A

2 区域 B (区域 A 外)

3 额定点

X axis frequency p.u.

Y axis voltage p.u.

1 zone A

2 zone B (outside zone A)

3 rating point

# 电气特性

## Electrical design

### 绝缘系统

ABB 采用 F 级绝缘材料，B 级温升，是当今业界通用的要求。

F 级绝缘系统 B 级温升的采用，使 ABB 产品可获得 25°C 的安全裕度。这使电机在短时间内过载使用，或在较高环境温度和海拔，或在高电压和频率容差下使用成为可能。这一设计同样可用于延长绝缘寿命。例如，温度降低 10K，绝缘寿命延长。

### B 级绝缘 (130°C)

- 额定环境温度 40°C
- 最大允许温升 80K
- 热点温升裕度 10K

### F 级绝缘 (155°C)

- 额定环境温度 40°C
- 最大允许温升 105K
- 热点温升裕度 10K

### H 级绝缘 (180°C)

- 额定环境温度 40°C
- 最大允许温升 125K
- 热点温升裕度 10K

### Insulation

ABB uses class F insulation, which with temperature rise B, is the common requirement among industry today. The use of class F insulation with class B temperature rise gives ABB products a 25 °C safety margin. This can be used to increase the loading for limited periods, to operate at higher ambient temperatures or altitudes, or with greater voltage and frequency tolerances. It can also be used to extend insulation life. For instance, a 10 K temperature reduction will extend the insulation life.

### Thermal class 130 (B)

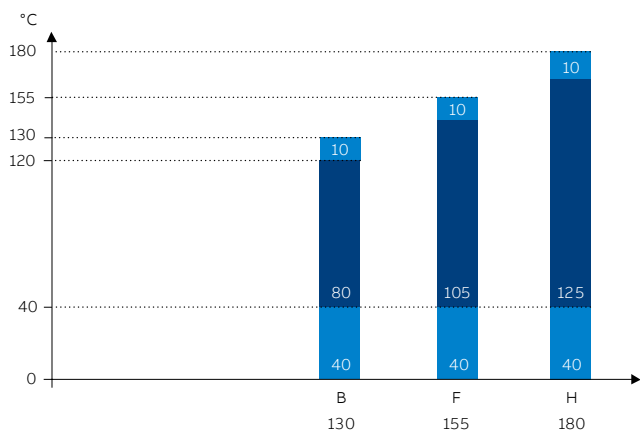
- Nominal ambient temperature 40 °C
- Max permissible temperature rise 80K
- Hot spot temperature margin 10K

### Thermal class 155 (F)

- Nominal ambient temperature 40 °C
- Max permissible temperature rise 105K
- Hot spot temperature margin 10K

### Thermal class 180 (H)

- Nominal ambient temperature 40 °C
- Max permissible temperature rise 125K
- Hot spot temperature margin 10K



各绝缘等级的安全裕度  
Safety margins per thermal class

# 电气特性

## Electrical design

### 运行环境

根据 IEC 60034-1 规定，容差是指测试值与铭牌（或样本）标称值之间的最大允许偏差。测试结果基于按照 IEC 60034-2-1, IEC 60034-9, IEC 60034-12 所规定的测试。

### Environmental

In accordance with IEC 60034-1, tolerance is the maximum allowed deviation between the test result and the declared value on the rating plate (or in the catalog). Test results are based on test procedures in accordance with IEC 60034-2-1, IEC 60034-9, and IEC 60034-12.

### 过载倍数

根据 IEC 60034，M2QA 系列电机能够在额定电压和频率下承受 1.5 倍的额定电流达 2 分钟。

### Overload times

According to IEC 60034, M2QA motors are designed to withstand overload capacity of 1.5 times rated current for 2 minutes at rated voltage and frequency.

### 电气数据容差

#### Tolerance for electrical data

	效率 Efficiency	功率因数 * Power factor	启动电流 Locked rotor current $I_s / I_N$	堵转转矩 Locked rotor torque $T_l / T_N$	最大转矩 Breakdown torque $T_b / T_N$	转动惯量 Moment of inertia	噪声等级 Noise level
PN (kW)	-15 % (1-η)	-1/6 (1-cos φ)	+20 % of the current	[-15 % + 25 %] of the torque	-10 % of the value	± 10 % of the value	+3 dB(A)
	转差率 Slip						
PN (kW) < 1	± 30 %						
PN (kW) ≥ 1	± 20 %						

\* 功率因数容差最小绝对值：0.02，最大绝对值：0.07。

\* Power factor minimum absolute value 0.02, maximum absolute value 0.07.

### 环境温度及海拔高度

标准电机设计的最大环境温度为 40°C，最高海拔为 1000m。如果当电机在较高的环境温度或海拔下运行，输出功率相应降低。详情请咨询 ABB。

### Ambient temperatures and high altitudes

Normal motors are designed for operation at a maximum ambient temperature of 40°C and at a maximum altitude of 1000 meters above sea level. If a motor is operated at higher ambient temperatures or altitude, it should be derated. Detailed information, please contact your ABB sales office.

### 对于不同高度和（或）不同环境温度的功率换算系数 kHT

#### Factor kHT for different site altitudes and / or coolant temperature

海拔高度 Site altitude above sea level	对应海拔高度的环境温度 Site altitude above sea level coolant temperature					
	< 30°C	30 ~ 40°C	45°C	50°C	55°C	60°C
1000 m	1.07	1.00	0.96	0.92	0.87	0.82
1500 m	1.04	0.97	0.93	0.89	0.84	0.79
2000 m	1.00	0.94	0.90	0.86	0.82	0.77
2500 m	0.96	0.90	0.86	0.83	0.78	0.74
3000 m	0.92	0.86	0.82	0.79	0.75	0.70
3500 m	0.88	0.82	0.79	0.75	0.71	0.67
4000 m	0.82	0.77	0.74	0.71	0.67	0.63

# 机械设计

## Mechanical design

### 表面处理

ABB 低压电机标准喷漆系统符合 ISO 12944 的腐蚀类别 C3M (相当于中等耐腐蚀性及耐用性)。其它耐腐蚀类别 C4M 和 C5M, 可以使用变量代码 115, 754 进行订购。

ABB 的标准色为蒙赛尔蓝 8B 4.5/3.25。其它颜色, 请用变量代码 114, 646 进行订购。

### 机械振动

ABB 标准电机满足 IEC60034-14 标准中的 A 级振动。如需 B 级振动, 请使用变量代码 417。

### Surface treatment

ABB's standard surface treatment is corrosivity category C3, durability range M (which equal to medium corrosivity and medium durability) based on the ISO 12944 standard. Special surface treatment is available in corrosivity categories C4 and C5, durability class M for both. See variant code 115, 754.

The standard ABB paint color for motors is Munsell blue 8B 4.5/3.25. Other colors are also available, see variant code 114, 646.

### Vibration

ABB motor meets the requirements of class A vibration based on IEC60034-14 standard. For class B vibration, use variant code 417.

# 机械设计

## Mechanical design

### 机座

包括底脚在内的电机机座是铸铁制成的。整体式铸铁底脚能够实现稳固的安装及降低振动。可提供底脚安装型、凸缘安装型及二者结合的电机。

### 排水孔

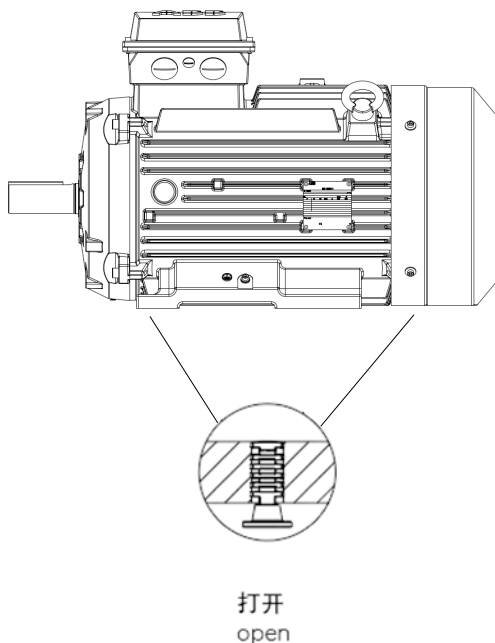
如果在非常湿润或潮湿的环境下，特别是在断续负载下操作电机，则应设置排水孔。根据电机安装方法，指定相应的 IM 标号，如 IM 3031。

机座号为71到355的电机安装了排水孔及闭合塞。孔塞在出厂时打开。安装电机时，确保排水孔朝下。

垂直安装时，上塞必须完全闭合。在灰尘过多的环境中，两个塞都应闭合。

安装方式不同于底脚安装型 IM B3 时，请在订购时使用变量代码 066。

请参阅“排水孔”标题下的变量代码 066。



### Motor frame

The motor frame is made of cast iron, and the standard design includes cast iron feet. Integrated cast iron feet provide rigid mounting, and lower vibration. Motors can be supplied for foot mounting, flange mounting, and combinations of these.

### Drain holes

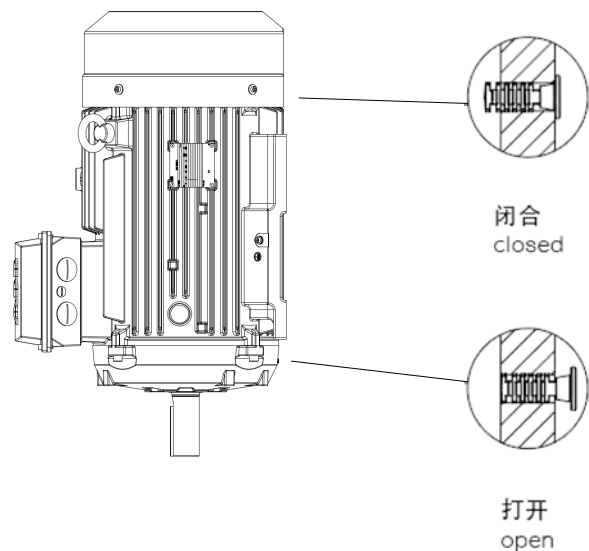
Motors that will be operated in very humid or wet environments, and especially under intermittent duty, should be provided with drain holes. The IM designation, such as IM 3031, determines the intended mounting arrangement for the motor.

Motor sizes 71 - 355 are fitted with drain holes and closable plugs. The plugs are open on delivery. When mounting the motors, ensure that the drain holes face downwards.

In the case of vertical mounting, the upper plug must be hammered home completely. In very dusty environments, both plugs should be hammered home.

When mounting arrangement differs from foot mounted IM B3, mention variant code 066 when ordering.

See variant codes 066 under the heading "Drain holes".



机座号 71-355  
标准情况下配备排水孔及闭合塞

As standard, motor sizes 71 - 355 are delivered with drain holes and closable plugs.

# 机械设计

## Mechanical design

### 轴承

电机通常安装以下单列深沟球轴承。

### 标准及可选设计

机座号	极数	标准设计		可选设计
		深沟球轴承		圆柱滚子轴承 (VC037)
		D 端	N 端	D 端
71	2-8	6203-2Z/C3	6202-2Z/C3	
80	2-8	6204-2Z/C3	6204-2Z/C3	
90	2-8	6205-2Z/C3	6205-2Z/C3	
100	2-10	6206-2Z/C3	6206-2Z/C3	
112	2-12	6207-2Z/C3	6206-2Z/C3	
132	2-12	6208-2Z/C3	6208-2Z/C3	NU208ECP/C3
160	2-12	6309-2Z/C3	6209-2Z/C3	NU309ECP/C3
180	2-12	6310-2Z/C3	6210-2Z/C3	NU310ECP/C3
200	2-12	6312-2Z/C3	6212-2Z/C3	NU312ECP/C3
225	2-12	6313-2Z/C3	6213-2Z/C3	NU313ECP/C3
250	2-12	6315-2Z/C3	6215-2Z/C3	NU315ECP/C3
280	2-12	6316/C3	6316/C3	NU316ECP/C3
315	2	6316/C3	6316/C3	NU316ECP/C3
	4-12	6319/C3	6319/C3	NU319ECP/C3
355	2	6319/C3	6319/C3	NU319ECP/C3
	4-12	6322/C3	6319/C3	NU322ECP/C3

### 说明：

电机铭牌上显示轴承型号及描述方式仅供客户更换、维修轴承作参考，不代表轴承品牌，具体的轴承品牌以公司实际使用的为准。

### 轴向锁定轴承

所有电机在 D 端标配轴向锁定轴承。

### Bearings

General performance motors are normally fitted with single-row deep-groove ball bearings, as shown in the table below.

### Standard and alternative designs

Motor size	Number of poles	Standard design		Alternative design
		Deep groove ball bearings		Roller bearings (VC037)
		D-end	N-end	D-end
71	2-8	6203-2Z/C3	6202-2Z/C3	
80	2-8	6204-2Z/C3	6204-2Z/C3	
90	2-8	6205-2Z/C3	6205-2Z/C3	
100	2-10	6206-2Z/C3	6206-2Z/C3	
112	2-12	6207-2Z/C3	6206-2Z/C3	
132	2-12	6208-2Z/C3	6208-2Z/C3	NU208ECP/C3
160	2-12	6309-2Z/C3	6209-2Z/C3	NU309ECP/C3
180	2-12	6310-2Z/C3	6210-2Z/C3	NU310ECP/C3
200	2-12	6312-2Z/C3	6212-2Z/C3	NU312ECP/C3
225	2-12	6313-2Z/C3	6213-2Z/C3	NU313ECP/C3
250	2-12	6315-2Z/C3	6215-2Z/C3	NU315ECP/C3
280	2-12	6316/C3	6316/C3	NU316ECP/C3
315	2	6316/C3	6316/C3	NU316ECP/C3
	4-12	6319/C3	6319/C3	NU319ECP/C3
355	2	6319/C3	6319/C3	NU319ECP/C3
	4-12	6322/C3	6319/C3	NU322ECP/C3

### Remark:

The bearing type and description on rating plate do not represent the bearing brand, instead it is a technical consideration that can help the owner to make replacement and set up a maintenance program. The brand is subject to the bearing installed.

### Axially-locked bearings

All motors are equipped as standard with an axially locked bearing. General at D-end.

# 机械设计

## Mechanical design

### 轴密封件

尺寸和类型符合下表:

### Bearing seals

This table presents the standard sizes and types of bearing seals per motor size.

机座号 Motor size	极数 Number of Poles	标准设计 Standard design		可选设计 Optional design	
		轴向密封件 Axial seal		D 端伽玛密封 Gamma seal at D-end	D 端径向密封 Radial seal at D-end
		D 端 D-end	N 端 N-end	变量代码 784 Variant codes 784	变量代码 072 Variant codes 072
71	2-8	V-16A	V-14A	17 x 32 x 4	17 x 35 x 7
80	2-8	V-20A	V-20A	20 x 35 x 4	20 x 40 x 7
90	2-8	V-25A	V-25A	25 x 40 x 4	25 x 42 x 7
100	2-10	V-30A	V-30A	30 x 47 x 4.5	30 x 52 x 7
112	2-12	V-35A	V-30A	35 x 52 x 4.5	35 x 55 x 7
132	2-12	V-40A	V-40A	40 x 57 x 4.5	40 x 62 x 7
160	2-12	V-45A	V-45A	45 x 62 x 4.5	45 x 72 x 8
180	2-12	V-50A	V-50A	50 x 70 x 5.5	50 x 80 x 8
200	2-12	V-60A	V-60A	60 x 80 x 5.5	60 x 85 x 8
225	2-12	V-65A	V-65A	65 x 85 x 5.5	65 x 90 x 10
250	2-12	V-75A	V-75A	75 x 95 x 5.5	75 x 100 x 10
280	2	VS80	VS80	80 x 100 x 5.5	80 x 110 x 10
	4-12	VS80	VS80	80 x 100 x 5.5	80 x 110 x 10
315	2	VS80	VS80	80 x 100 x 5.5	95 x 120 x 12
	4-12	VS95	VS95	95 x 115 x 5.5	95 x 120 x 12
355	2	VS95	VS95	95 x 115 x 5.5	95 x 120 x 12
	4-12	VS110	VS95	110 x 130 x 5.5	110 x 140 x 12

# 机械设计

## Mechanical design

### 轴承寿命

根据 ISO 281, 轴承的正常寿命  $L_{10h}$  定义为在特定条件下 90% 的相同轴承在一系列测试中所达到或超过的运行小时数。50% 的轴承至少达到这一数字的五倍。

### 润滑

装有封闭式轴承的电机

机座号为 71-250 的电机采用封闭式轴承。封闭式轴承中装有优质的润滑脂。铭牌上印有轴承型号。

以下数值可作为轴承使用寿命指导值，具体寿命取决于应用和负载情况：2-12 极电机约为 40,000 小时。

### 皮带轮直径

所需轴承寿命确定后，最小允许皮带轮直径可使用  $F_R$  计算，如下所示：

$$D = \frac{1.9 \cdot 10^7 \cdot K \cdot P}{n \cdot F_R}$$

#### 其中：

D:	带轮直径, 单位 (mm)
P:	功率要求, kW
n:	电机转速, r/min
K:	皮带张力因数, 取决于皮带类型和负载类型。 V 形皮带通用值为 2.5。
$F_R$ :	允许径向力

### Bearing life

The nominal life  $L_{10h}$  of a bearing is defined according to ISO 281 as the number of operating hours achieved or exceeded by 90% of identical bearings in a large test series under specified conditions. 50% of bearings achieve at least five times this lifetime.

### Lubrication

Motors with bearings greased for life

Motors in frame sizes 71-250 are equipped with bearings greased for life. Bearings are lubricated with high-quality grease. Bearing types are stated on the rating plate.

The following values can be used as a guide for bearing lifetime, depending on application and load conditions: 2-12 pole motors about 40,000h.

### Pulley diameter

When the desired bearing life has been determined, the minimum permissible pulley diameter can be calculated with  $F_R$  as follows:

$$D = \frac{1.9 \cdot 10^7 \cdot K \cdot P}{n \cdot F_R}$$

#### Where:

D:	Pulley diameter, mm
P:	Power requirement, kW
n:	Motor speed, r/min
K:	Belt tension factor, dependent on belt type and type of duty A common value of V-belts is 2.5
$F_R$ :	Permissible radial force

# 机械设计

## Mechanical design

### 轴上允许负载


#### 允许轴向力

表中提供了环境温度为 25°C 时，50Hz 的正常条件下，径向力为零时的轴伸允许轴向力 (N)。分别对轴承寿命满足 20000 和 40000 小时进行计算。

在 60 Hz 时，数值将相应减少 10%。

需提供同时存在径向力和轴向力的允许负载值，请联系 ABB。

给定轴向力  $F_{AD}$ ，假设 D 端轴承由锁环锁定。



安装方式 IM B3

机座号 Motor size	极数 No. of poles	轴伸长度 Length of shaft extension E (mm)	深沟球轴承 Basic design with deep groove ball bearings			
			20,000 小时 20,000 h		40,000 小时 40,000 h	
			$F_{AD}$ (N)	$F_{AZ}$ (N)	$F_{AD}$ (N)	$F_{AZ}$ (N)
71	2	30	615	335	495	215
	4	30	780	500	610	330
	6	30	895	615	710	430
	8	30	995	715	780	500
80	2	40	785	385	640	240
	4	40	990	590	780	380
	6	40	1130	730	885	485
	8	40	1250	850	995	595
90	2	50	920	360	765	205
	4	50	1145	585	915	355
	6	50	1300	740	1050	490
	8	50	1435	875	1150	590
100	2	60	1205	545	985	325
	4	60	1480	820	1190	530
	6	60	1720	1060	1355	695
	8	60	1890	1230	1485	825
	10	60	2055	1395	1630	970
112	2	60	1565	905	1260	600
	4	60	1995	1335	1550	890
	6	60	2000	1340	1555	895
	8	60	2530	1870	1995	1335
	10	60	2755	2095	2160	1500
	12	60	2945	2285	2300	1640
132	2	80	1735	855	1415	535
	4	80	2130	1250	1705	825
	6	80	2480	1600	1930	1050
	8	80	2745	1865	2135	1255
	10	80	2970	2090	2315	1435
	12	80	3165	2285	2495	1615

### Permissible loading on the shaft


#### Permissible axial forces

The following table gives the permissible axial forces on shaft in Newton, assuming zero radial force, ambient temperature of 25°C, and normal conditions at 50Hz. The values are given for calculated bearing life of 20000 and 40000 hours per motor size.

At 60 Hz, the values must be reduced by 10 percent.

Permissible loads of simultaneous radial and axial forces can be supplied on request.

For axial force  $F_{AD}$ , it is assumed that the D-bearing is locked with a locking ring.



Mounting arrangement IM B3

机座号 Motor size	极数 No. of poles	轴伸长度 Length of shaft extension E (mm)	深沟球轴承 Basic design with deep groove ball bearings			
			20,000 小时 20,000 h		40,000 小时 40,000 h	
			$F_{AD}$ (N)	$F_{AZ}$ (N)	$F_{AD}$ (N)	$F_{AZ}$ (N)
160	2	110	2740	1960	2150	1370
	4	110	3515	2735	2730	1950
	6	110	4145	3365	3140	2360
	8	110	4700	3920	3585	2805
180	10	110	5020	4320	3875	3175
	12	110	5400	4700	4155	3455
	2	110	3135	2335	2445	1645
	4	110	4005	3205	3095	2295
200	6	110	4775	3975	3605	2805
	8	110	4910	4505	3745	3205
	10	110	5820	5020	4405	3605
	12	110	6240	5440	4805	4005
	2	110	4005	3105	3105	2205
	4	110	5140	4240	3960	3060
225	6	110	6140	5240	4610	3710
	8	110	6890	5990	5190	4290
	10	110	7515	6615	5670	4770
	12	110	8085	7185	6215	5315
	2	140	4365	3615	3350	2600
	4	140	5630	4880	4290	3540
250	6	140	6785	6035	5045	4295
	8	140	7575	6825	5645	4895
	10	140	8310	7560	6215	5465
	12	140	8950	8200	6840	6090

机座号 Motor size	极数 No. of poles	轴伸长度 Length of shaft extension E (mm)	深沟球轴承 Basic design with deep groove ball bearings			
			20,000 小时 20,000 h		40,000 小时 40,000 h	
			F <sub>AD</sub> (N)	F <sub>Az</sub> (N)	F <sub>AD</sub> (N)	F <sub>Az</sub> (N)
250	2	140	5355	4195	4125	2965
	4	140	7010	5850	5385	4225
	6	140	8095	6935	6170	5010
	8	140	9385	8160	7035	5810
	10	140	10755	9595	8065	6905
280	2	140	11540	10380	8665	7505
	4	140	6125	4125	4805	2805
	4	140	7755	5755	6025	4025
	6	140	8930	6920	6890	4885
	8	140	9975	7975	7655	5655
315SM	2	140	11210	9210	8475	6475
	4	140	12020	10020	9095	7095
	2	140	6080	4080	4760	2765
	4	170	9710	6310	7655	4255
	6	170	11100	7700	8690	5290
315ML	8	170	12320	8920	9590	6190
	2	140	6005	3840	4690	2535
	4	170	9470	6030	7430	3990
	6	170	10790	7390	8395	4995
	8	170	11855	8455	9160	5760
	10	170	13520	10120	10270	6870
	12	170	14500	11100	11025	7625

机座号 Motor size	极数 No. of poles	轴伸长度 Length of shaft extension E (mm)	深沟球轴承 Basic design with deep groove ball bearings			
			20,000 小时 20,000 h		40,000 小时 40,000 h	
			F <sub>AD</sub> (N)	F <sub>Az</sub> (N)	F <sub>AD</sub> (N)	F <sub>Az</sub> (N)
355SM	2	140	7540	4140	5990	2590
	4	210	11720	8320	9095	5695
	6	210	13370	9970	10305	6905
	8	210	15340	11940	11745	8345
	10	210	16980	13580	13035	9635
355ML	12	210	18340	14940	14075	10675
	2	140	7485	4045	5935	2495
	4	210	11595	8195	8975	5575
	6	210	13165	9765	10105	6705
	8	210	15440	12040	11840	8440
355LK	2	140	7270	3870	5735	2335
	4	210	11830	8430	9100	5700
	6	210	13535	10135	10335	6935
	8	210	15150	11750	11560	8160

### 允许径向力

表中提供了环境温度为 25°C 时，50Hz 的正常条件下，轴向力为零时的轴伸允许径向力（N）。分别对轴承寿命满足 20,000 小时和 40,000 小时进行计算。


电机为底座安装型 IM B3，并且含横向力。在某些情况下，轴的强度影响允许负载力。在 60Hz 时，数值将相应减少 10%。对于双速电机，数值应以较高的速度为准。

需提供同时存在径向力和轴向力的允许负载值，请联系 ABB。

如果径向力作用于点  $X_0$  和  $X_{max}$  之间，则允许负载力  $F_R$  可以通过以下公式计算：

$$F_R = F_{X_0} - \frac{X}{E} (F_{X_0} - F_{X_{max}})$$

E : 基本型号中的轴伸长度



机座号 Motor size	极数 No. of poles	轴伸长度 Length of shaft extension E (mm)	深沟球轴承 Basic design with deep groove ball bearings			
			20,000 小时 20,000 h		40,000 小时 40,000 h	
			$F_{X_0}$ (N)	$F_{X_{max}}$ (N)	$F_{X_0}$ (N)	$F_{X_{max}}$ (N)
71	2	30	565	480	445	380
	4	30	710	605	560	480
	6	30	815	695	645	550
	8	30	915	795	725	630
80	2	40	725	610	575	480
	4	40	925	790	730	625
	6	40	1060	905	840	715
	8	40	1160	915	970	770
90	2	50	775	630	495	400
	4	50	980	800	775	630
	6	50	1125	915	890	725
	8	50	1240	995	980	800
100	2	60	1105	910	840	690
	4	60	1390	1140	1095	900
	6	60	1585	1305	1245	1025
	8	60	1755	1390	1385	1140
	10	60	1905	1505	1570	1240
112	2	60	1535	1275	1210	1005
	4	60	1925	1600	1520	1265
	6	60	1925	1595	1515	1260
	8	60	2450	1935	1930	1635
	10	60	2625	2070	2180	1720
132	12	60	2790	2205	2320	1830
	2	80	1635	1295	1290	1020
	4	80	2040	1615	1600	1270
	6	80	2340	1855	1840	1455
	8	80	2605	2050	2040	1625
	10	80	2785	2190	2205	1735
12	80	3000	2360	2450	1925	

### Permissible radial forces

The following table gives the permissible radial forces on shaft in Newton, assuming zero axial force, ambient temperature of 25°C, and normal conditions at 50Hz. The values are given for calculated bearing life of 20,000 and 40,000 hours per motor size.


These calculated values further assume mounting position IM B3 (foot-mounted), with force directed sideways. In some cases, the strength of the shaft affects permissible forces.

Permissible loads of simultaneous radial and axial forces can be supplied on request.

If the radial force is applied between points  $X_0$  and  $X_{max}$ , the permissible force  $F_R$  can be calculated with the following formula:

$$F_R = F_{X_0} - \frac{X}{E} (F_{X_0} - F_{X_{max}})$$

E : Length of the shaft extension in the standard version



机座号 Motor size	极数 No. of poles	轴伸长度 Length of shaft extension E (mm)	深沟球轴承 Basic design with deep groove ball bearings			
			20,000 小时 20,000 h		40,000 小时 40,000 h	
			$F_{X_0}$ (N)	$F_{X_{max}}$ (N)	$F_{X_0}$ (N)	$F_{X_{max}}$ (N)
160	2	110	2990	2415	2335	1900
	4	110	3800	3050	2975	2400
	6	110	4345	3500	3395	2760
	8	110	4720	3715	3685	2900
180	10	110	5160	4055	4145	3260
	12	110	5520	4350	4435	3495
	2	110	3515	2965	2740	2310
200	4	110	4390	3705	3420	2880
	6	110	5100	4365	3985	3360
	8	110	5630	4400	4580	3710
	10	110	6020	4735	4845	3805
	12	110	6415	5045	5160	4055
	2	110	4565	3815	3550	2990
225	4	110	5725	4810	4450	3770
	6	110	6600	5475	5160	4280
	8	110	7325	5740	5765	4760
	10	110	7940	6235	6585	5170
	12	110	8495	6680	7045	5540
	2	140	5135	4455	3978	3450
250	4	140	6420	5375	4960	4150
	6	140	7490	6270	5815	4870
	8	140	8140	6335	6535	5085
	10	140	8915	6970	7155	5595
	12	140	9540	7470	7655	5995

机座号 Motor size	极数 No. of poles	轴伸长度 Length of shaft extension E (mm)	深沟球轴承 Basic design with deep groove ball bearings			
			20,000 小时 20,000 h		40,000 小时 40,000 h	
			$F_{x0}$ (N)	$F_{xmax}$ (N)	$F_{x0}$ (N)	$F_{xmax}$ (N)
250	2	140	6105	5085	4700	3950
	4	140	7935	6425	6185	5015
	6	140	8950	7095	6915	5550
	8	140	9915	8025	7720	6250
	10	140	11365	8880	9200	7185
280	12	140	12340	9645	10375	8105
	2	140	6565	5605	5060	4320
	4	140	8230	7025	6330	5405
	6	140	9325	7960	7155	6110
	8	140	10375	8070	7990	6820
315SM	10	140	11425	8895	9490	7390
	12	140	12230	9545	10160	7925
	2	170	6415	5465	4925	4195
	4	170	9725	8025	7485	6175
	6	170	11060	9125	8495	7010
315ML	8	170	12275	9450	9610	7795
	2	140	5980	5290	4450	3935
	4	170	9185	7745	6915	5830
	6	170	10640	9125	8010	6915
	8	170	11565	8665	8785	7480
315LK	10	170	13245	10165	11165	8570
	12	170	14305	11030	12055	9300

机座号 Motor size	极数 No. of poles	轴伸长度 Length of shaft extension E (mm)	深沟球轴承 Basic design with deep groove ball bearings			
			20,000 小时 20,000 h		40,000 小时 40,000 h	
			$F_{x0}$ (N)	$F_{xmax}$ (N)	$F_{x0}$ (N)	$F_{xmax}$ (N)
355SM	2	140	7235	6340	5450	4775
	4	210	12150	10025	9225	7615
	6	210	13620	11240	10275	8480
	8	210	16090	12110	12590	10180
	10	210	17965	13725	14825	11330
355ML	12	210	19505	15000	16100	12380
	2	140	7070	6280	5265	4675
	4	210	11975	10065	9020	7585
	6	210	13280	11165	9900	8320
	8	210	16325	12570	12350	10375
355LK	10	210	17965	13725	14825	11330
	2	140	6720	6055	4895	4410
	4	210	12470	10700	9275	7960
355L	6	210	14030	12040	10375	8905
	8	210	15820	13580	11800	10125

# 机械设计

## Mechanical design

### 标准接线盒交付

标准接线盒的防护等级为 IP55。标准情况下，接线盒安装在电机 D 端顶部。此外，还可以将接线盒安装在左侧或右侧，请参考订购信息。机座号 71-132 的电机，采用一体式接线盒。机座号 160-355 的电机，采用分体式接线盒。

机座号为 160-355 的电机接线盒可 2x180° 转动。因此电机的两侧都可以接入电缆。

如果未另行规定，则采用标准交付。

注意：对于 500V 及 / 或侧面安装的电机，请联系 ABB！

### Standard terminal box

The degree of protection for the standard terminal box is IP 55. By default, terminal boxes are mounted on top of the motor at D-end. In motor sizes 71-132, the terminal box is integrated with motor frame. In motor sizes 160-355, the terminal box is separate from motor frame.

The terminal boxes of motor sizes 160-355 can be turned 2x180°, to allow cable entry from either side of motor.

Standard delivery if no other information is provided.

Note: For other network voltages and/or side-mounted motors, contact your ABB sales office.

机座号 Motor size	极数 Pole number	螺纹孔 Threaded holes	电缆外径 mm Cable outer diameter mm	单芯横截面 平方毫米/相 Single core cross-section mm <sup>2</sup> /phase	端子螺栓尺寸 6x terminal bolt size 6x
71	2-8	2xM16x1.5	2xØ5-9	2.5	M4
80-90	2-8	2xM25x1.5	2xØ11-16	4	M4
100-132	2-12	2xM32x1.5	2xØ14-21	10	M5
160-180	2-12	2xM40x1.5, M16x1.5	2xØ19-27, Ø5-9	35	M6
200-250	2-12	2xM63x1.5, M16x1.5	2xØ37-44, Ø5-9	70	M10
280	2-12	2xM63x1.5, 2xM20x1.5	2xØ37-44, 2xØ8-14	2x150	M10
315	2-12	2xM63x1.5, 2xM20x1.5	2xØ37-44, 2xØ8-14	2x240	M12
355	2-12	2xM75x1.5, 2xM20x1.5	2xØ48-60, 2xØ8-14	4x240	M12

电机接地 Earthing	机座接地 Earthing on frame	主接线盒接地 Earthing in main terminal box
71-132	M5	M5
160-250	M6	M6
280-355	M10	M10

# 变频器驱动

## Variable speed drives

鼠笼式感应电机具有很好的的可用性、可靠性与效率。通过变频器—一种变速驱动器（VSD），该电机的性能将更优异。电机不是一直处于全速运转状态，相反，变速驱动器能够根据实际需要调节速度。这样，就能够准确地控制工艺过程，在某些情况下，甚至可以达到比标称速度更快的运转速度，从而提高产能。

与传统的全压启动（DOL）不同，变速驱动器（VSD）能够平滑地进行启动。这样就大大地减少了电机及驱动应用中的压力。平滑启动还意味着供电网络不受高启动电流的影响。在电网设计时，应将该因素纳入考虑。

由于在速度和工艺用电方面的优化，ABB低压通用型电机以及变频器的使用，尤其是ABB变频器的使用，通常能够在很大程度上实现节能。节能不仅能够产生环境效益，还能够带来经济效益。ABB低压通用型电机适用于DOL运行，也适用于变速运行。选择面广，电机能够适应严苛的应用要求。

在为变速驱动器选择低压通用型电机时，应考虑以下方面：

### 1. 确定规格

变频器所馈送的电压（或电流）并非完全是正弦的。这可能会增加电机的损耗、振动以及噪音等级。此外，这些损耗分布的变化可能影响电机的温升。因此，在任何情况下，需要根据特定的变频器说明书正确选择电机规格。

使用ABB变频器时，请使用ABB的DriveSize程序来确定电机规格。该工具利用的是基本综合性组合型式试验的规格确定规则。

当手动确定规格时，请注意，此目录中以及相关手册中给出的负载率（负载能力）曲线仅供参考。可根据要求提供针对各个电机和变频器的精确数值。除确定热容量外，必须保持一个转矩裕度，以保持稳定。电机的最大转矩在整个工作周期内应至少高于负载转矩30%。

尤其是在使用较长的供电电缆时，还必须考虑供电电缆的压降。

Squirrel cage induction motors offer excellent availability, reliability and efficiency. With a variable speed drive (VSD) – a frequency converter – the motor performance can be further improved. Instead of running the motor continuously at full speed, the VSD enables speed adjustment according to actual need. The VSD makes it possible to control the process accurately and in some cases even to improve the capacity of the process by operating at higher than nominal speeds.

In contrast with conventional applications operating with a direct-on-line (DOL) supply, a VSD makes smooth starting possible. This significantly reduces the stress on the motor and driven application. Smooth starting also means that the supply network will not be affected by high starting current transients, a fact that can be taken into account in the design of the network.

The use of ABB industrial drives together with General purpose motors usually provides substantial energy savings as the speed and therefore the power required by the process can be optimized. General purpose motors are designed for both DOL and variable speed operation. A wide range of options is available, so motors can be adapted to the demanding applications.

When selecting general purpose motors for VSDs, the following points must be taken into consideration.

### 1. Dimensioning

The voltage (or current) fed by the VSD is not purely sinusoidal. This may increase motor losses, vibration, and noise level. Further, a change in the distribution of losses may affect the motor's temperature rise. In each case, the motor must be correctly sized according to the instructions supplied for the frequency converter.

ABB's DriveSize program utilizes dimensioning rules that are based on comprehensive motor and drive type tests. Please use DriveSize for selecting the correct motor and drive combination for a desired load profile.

In case of manual dimensioning, note that the loadability (or load capacity) curves provided in this catalog and in the respective manuals are indicative only. Values for a specific motor and drive are available on request. In addition to thermal dimensioning, an adequate torque margin must be maintained for stability. The maximum torque of the motor must be at least 30 % higher than the load torque over the whole duty range.

Voltage drop in the supply cable must also be taken into consideration, especially in cases where long supply cables are needed.

# 变频器驱动

## Variable speed drives

### 2. 工作转速、振动及轴密封

低压通用型电机设计可以在宽转速范围下工作，在大多数情况下，也可以显著高于额定转速（即铭牌上印制的转速）的较高转速运行。可以通过铭牌或 DriveSize 工具获知最大转速。除电机转速范围外，请确保不超出整个应用的最大或临界转速。

下表 1 给出了低压通用型电机的最大规定转速值。

表 1 低压通用型电机的最大规定转速值

机座号 Motor Size	2 极电机 2-pole motors		4 极电机 4-pole motors		6 极电机 6-pole motors		8,10,12 极电机 8,10,12-pole motors	
	标准风扇 standard fan	金属风扇 metal fan	标准风扇 standard fan	金属风扇 metal fan	标准风扇 standard fan	金属风扇 metal fan	标准风扇 standard fan	金属风扇 metal fan
71-112	6000	6000	6000	6000	6000	6000	6000	6000
132-200	4500	4500	4500	4500	4500	4500	4500	4500
225-250	4200	4200	4200	4200	4200	4200	4200	4200
280	3600	3800	2500	2800	1800	2800	1500	2800
280*	3600	3800	1800	2800	1800	2800	1500	2800
315	3600	3600	1800	2400	1800	2400	1500	2400
355	3600	3600	1800	2400	1800	2400	1500	2400

\* 高输出设计

### 2. Operating speed, vibrations and shaft seals

General purpose motors are designed to work over a wide speed range and also at significantly higher than nominal speeds. The maximum speeds can be found on motor rating plates or in DriveSize. In addition to motor speed, make sure that the maximum or critical speed of the entire application is not exceeded.

Guideline maximum speed values for general purpose motors are shown in Table 1.

Table 1. Guideline maximum speed values for general purpose cast iron motors.

### 3. 通风

电机低速运行时，风扇的冷却能力下降，进而降低电机的负载能力。可以另外使用一个独立的恒速风扇（变量代码 183）来提升冷却能力。

高速运行时，应考虑使用金属风扇（变量代码 068），而不是塑料风扇。

### 4. 润滑

在变速应用场合中，轴承温度的变化是由于速度和电机负载变化的结果。这时，在正常工作条件下，通过测量轴承温度，可以得到精确的润滑间隔时间。如果测量温度高于 +80°C，则需要缩短在润滑铭牌或电机手册中规定的润滑间隔时间，或使用适用于高温工况的润滑脂。请参见 ABB 低压电机手册。

在非常低的速度和温度（低于 20°C）下连续工作时，标准润滑脂的润滑能力可能不足，而需要使用含添加剂的特定润滑脂。更多详情，请联系 ABB。

### 3. Ventilation

When the motor is operated at low speeds, the cooling capacity of the fan decreases, which again reduces the motor's load capacity. A separate constant speed fan (variant codes 183) can be used to increase cooling capacity.

At high speeds, the use of metal fans (variant code 068) instead of plastic ones should be considered.

### 4. Lubrication

In variable speed applications, bearing temperature varies as a function of speed and motor load. In such cases, the accurate relubrication intervals can be obtained by measuring the bearing temperature under normal operating conditions. If the measured temperature is higher than +80°C, the relubrication intervals specified on the lubrication plate or in the maintenance manual must be shortened, or lubricants suitable for high operating temperatures must be used. See ABB Low voltage motor manual.

In case of continuous operation at very low speeds and at very low temperatures (below -20°C), the lubrication properties of standard greases may not be sufficient, and special greases with additives are needed.

# 变频器驱动

## Variable speed drives

如果电机配备密封轴承，即一次性润滑轴承，则务必注意，当工作温度与设计温度不同时，轴承的工作寿命也会与设计值不同。有关轴承工作寿命的详细信息，请参见本目录及相关手册中与产品相关的章节。

我们不建议使用所谓的导电润滑脂来消除轴承电流，因为此类产品的润滑性能不良，因此导电性很弱。

### 5. 绕组绝缘

为确保电机的可靠性，当为电机选择正确的绝缘系统和为变频器选择正确的输出滤波器时，必须考虑变频器的非正弦输出电压的影响。

当使用具有非受控直流电压的变频器时，应根据表 2 选择绝缘和滤波器。

表 2 变频器（其具有非受控直流电压）电机的绕组绝缘及变频器输出滤波器选择

所要求的绕组绝缘和滤波器	
$500V < U_N \leq 600V$	ABB 变频绝缘 +dU/dt 滤波器或 ABB 变频加强绝缘（变量代码 405）
$600V < U_N \leq 690V$	ABB 变频加强绝缘（变量代码 405） 及变频器输出端的 dU/dt 滤波器

dU/dt 滤波器的详细信息，请参见相关的 ABB 驱动目录。

如果表 2 中的内容不适用，以及对于其它类型的变频器，则应根据电机端子电压进行选择。

电机端子处允许的相对地电压峰值为：

- ABB 变频绝缘 1300V
- ABB 变频加强绝缘（变量代码 405）1800V

受脉冲上升时间的影响，电机端子处允许的最大相对地电压峰值见图 1。最高的曲线（即“ABB 变频加强绝缘”）适用于变频器电源采用特殊绕组绝缘的电机，变量代码为 405。“ABB 变频绝缘”适用于具有标准设计的电机。

Operating temperatures also affect bearing life. When motors are equipped with sealed bearings, that is, bearings greased for life, it must be noted that if the operating temperature differs from the design temperature, the bearing life will also be different. More information on bearing lifetimes can be found in section Mechanical design of this catalog and in the relevant manuals.

The use of so-called conductive greases for elimination of bearing currents is not recommended because of their poor lubrication characteristics and low conductivity.

### 5. Winding insulation

To ensure that motors operate reliably, the effects of non-sinusoidal output voltages from the converter must be taken into consideration when selecting the correct insulation system for the motor and output filters for the converter.

Insulation and filters must be selected according to Table 2.

Table 2. Selection of motor winding insulation and converter output filters

Winding insulation and filters required	
$500V < U_N \leq 600V$	VSD insulation + dU/dt filters OR VSD reinforced insulation (variant code 405)
$600V < U_N \leq 690V$	VSD reinforced insulation (variant code 405) AND dU/dt filters at converter output

For more information on dU/dt filters, see the relevant ABB Drives catalogs.

For other converters and cases where the guidelines shown in Table 2 cannot be applied, selection must be based on the voltages present at motor terminals.

The allowed phase-to-ground voltage peaks at motor terminals:

- 1300 V peak: VSD insulation
- 1800 V peak: VSD reinforced insulation, variant code 405

The maximum allowed phase-to-phase voltage peaks at the motor terminals as a function of pulse rise time are shown in Figure 1. The higher curve, VSD reinforced insulation, applies to motors with special winding insulation for frequency converter supply, variant code 405. VSD insulation applies to motors with standard design.

# 变频器驱动

## Variable speed drives

图 1 受脉冲上升时间的影响，电机端子处允许的最大相对地电压峰值


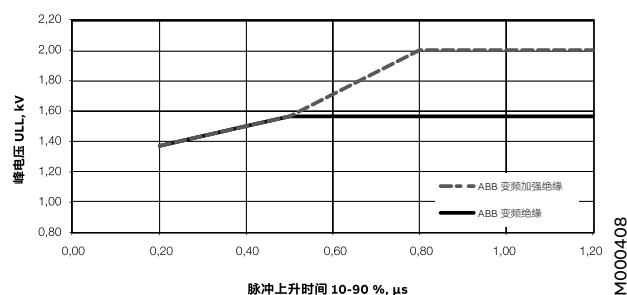


Figure 1. Maximum allowed phase-to-phase voltage peaks at motor terminals, as a function pulse rise time.

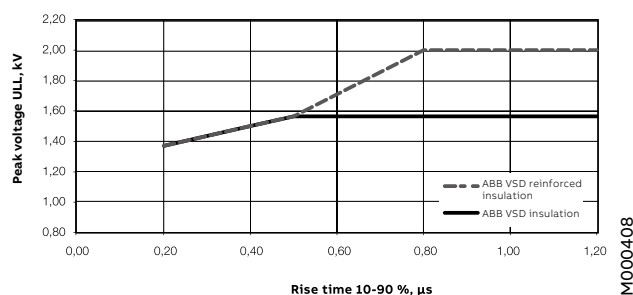

### 6. 轴承电流

必须在所有电机中消除轴承电压和电流,确保整项工作的可靠开展。如果使用具有非受控直流电压的 ABB ACS800 or ACS550 驱动器,则必须按照下表 3 所示,使用绝缘轴承(变量代码 701)和/或在变频器输出上加上适当规格的滤波器。有关其它代替产品和变频器类型,请联系 ABB。订购时,请明确注明将使用的代替产品。

有关轴承电流和电压的详细资料,请参见“AC 驱动系统中的轴承电流”工厂文件或联系 ABB。

表 3 与变频器(其具有非受控直流电压)配合使用的电机中的轴承电流防护。

标称功率 ( $P_N$ ) 及 / 或机座号 (IEC)	防护措施
$P_N < 100 \text{ kW}$	无需采取措施
$P_N \geq 100 \text{ kW}$ 或 IEC 315 $\leq$ 机座号 $\leq$ IEC 355	非驱动端绝缘轴承
$P_N \geq 350 \text{ kW}$	非驱动端绝缘轴承,并在变频器中设置共模滤波器

### 共模滤波器

共模滤波器减少了共模电流,从而减少了出现轴承电流的风险。共模滤波器不会严重影响电机接线端子的相电压或电源电压。更多详情,请参见 ABB 驱动器目录。

### 6. Bearing currents

Bearing voltages and currents must be avoided in all motors to ensure reliable operation of the entire application. With ACS800 or ACS550 drives and uncontrolled DC voltage, insulated bearings (variant code 701) and/or properly dimensioned filters at the converter must be used, as indicated in Table 3.

For information on other converter types, contact ABB Sales. When ordering, clearly state which alternative will be used.

Table 3. Precautionary measures to avoid bearing currents in variable speed drives.

Nominal Output ( $P_N$ ) AND / OR Motor size (IEC)	Precautionary measures
$P_N < 100 \text{ kW}$	No action needed
$P_N \geq 100 \text{ kW}$ OR IEC 315 $\leq$ Frame size $\leq$ IEC 355	Insulated non-drive end bearing
$P_N \geq 350 \text{ kW}$	Insulated non-drive end bearing AND Common mode filter at the converter

### Common mode filters

Common mode filters reduce common mode currents and so decrease the risk of bearing currents. Common mode filters do not significantly affect the phase of main voltages on motor terminals. For more information, see ABB drives catalogs.

# 变频器驱动

## Variable speed drives

### 绝缘轴承

ABB 使用带绝缘内圈或外圈的轴承。所谓混合轴承，也就是带非导电性陶瓷滚动元件的轴承，也可用于特定用途。

### Insulated bearings

ABB uses bearings with insulated inner or outer races. Hybrid bearings, that is, bearings with non-conductive ceramic rolling elements, can also be used in special applications.

### 7. 电缆敷设、接地及 EMC

变频器对驱动系统的电缆铺设和接地提出了更高的要求。应使用屏蔽对称电缆和提供 360°接头的电缆接头（也称为 EMC 接头，变量代码 704）来连接电机。对于输出功率不高于 30kW 的电机，可使用非对称电缆，但始终建议使用屏蔽电缆，尤其在驱动应用中存在敏感部件时。

### 7. Cabling, grounding, and EMC

The use of a variable speed drive sets higher demands on the cabling and grounding of the drive system. The motor must be cabled using shielded symmetrical cables and cable glands providing 360° bonding (EMC glands, variant code 704). For motors up to 30 kW, asymmetrical cables can be used, but shielded cables are always recommended, especially if there are sensitive components in the driven application.

对于机座号为 IEC 280 及以上的电机，除非在一个公共的金属底座上安装电机和驱动机器，否则需要在电机机座和机器之间另外进行电位均衡处理。当使用一个金属底座来实现电位均衡时，应检查此连接的高频导电性。有关变频驱动器的接地和电缆敷设的更多信息，请参见手册“驱动系统的接地和电缆敷设”（编号：3AFY 61201998 R0125 REV B）。

For motor sizes IEC 280 and above, additional potential equalization is needed between the motor frame and the machinery, unless the motor and the driven machine are installed on a common steel base. When a steel base is used for potential equalization, high frequency conductivity of the connection must be checked.

为满足 EMC 的要求，除安装正确的电缆接头外，还必须使用专用的 EMC 电缆（另外具有专用接地件）。请参见变频器手册。

To meet EMC requirements, special EMC cables must be used in addition to appropriate cable gland mounting with special earthing pieces. Refer to ABB drives manuals for more information.

### 8. 变频器的电机负载能力

图 2、图 3 所示的负载能力曲线具有指导意义。欲知精确数值，请联系 ABB。这些负载能力曲线还可以用于其它变频器的初步规格确定，但必须注意的是，不同变频器的谐波分量和控制算法互不相同，因此电机的温升也会不同。

### 8. Motor loadability with frequency converter drives

The loadability curves shown in Figures 2 and 3 are indicative guidelines and do not present exact values. These loadability curves can also be used for preliminary dimensioning of motors used at frequency converter duty, but it must be noted that the harmonic content and control algorithms vary between frequency converters, so the motor temperature rise will also be different.

# 变频器驱动


## Variable speed drives

图 2 具有 DTC 控制的变频器负载曲线

Figure 2. Loadability curves for frequency converters with DTC control

## B 级温升

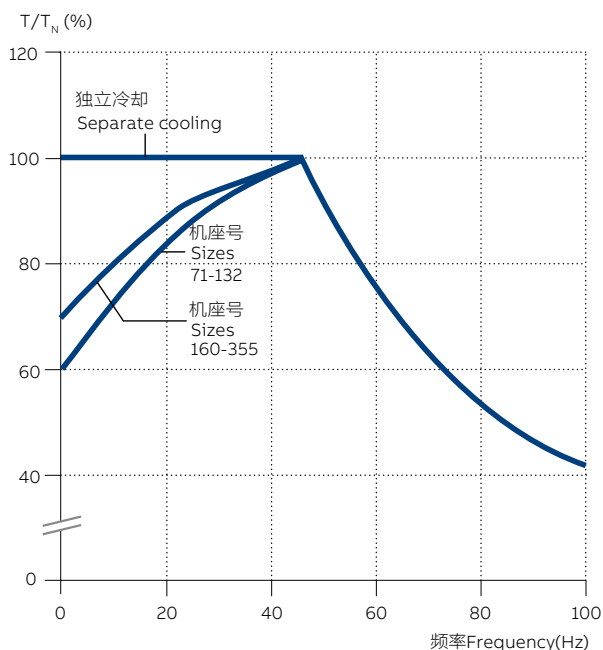Temperature rise B



## F 级温升

Temperature rise F


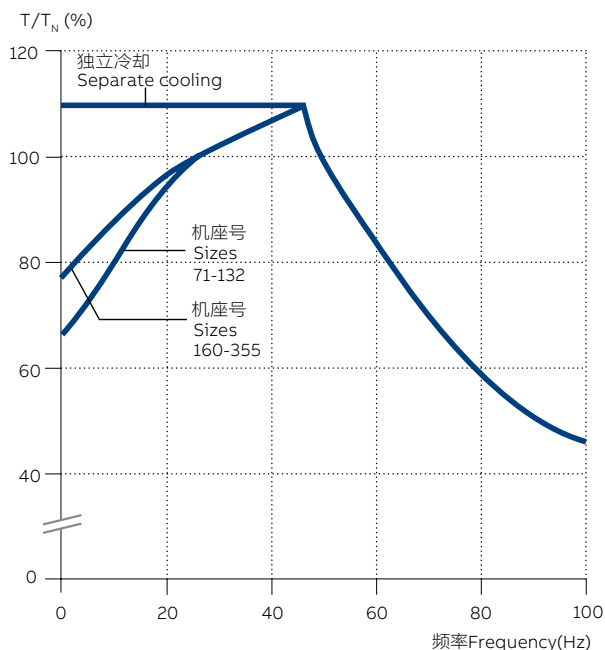


图 3 其它控制类型的变频器负载曲线

Figure 3. Loadability curves for other frequency converters


## B 级温升

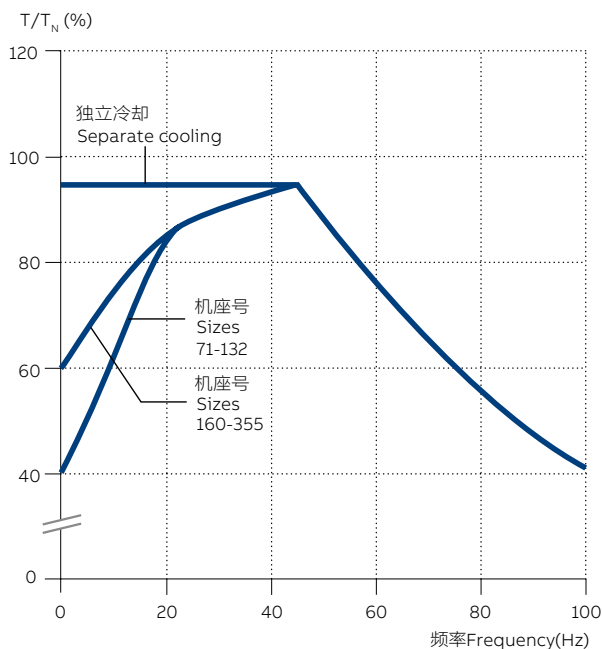Temperature rise B



## F 级温升

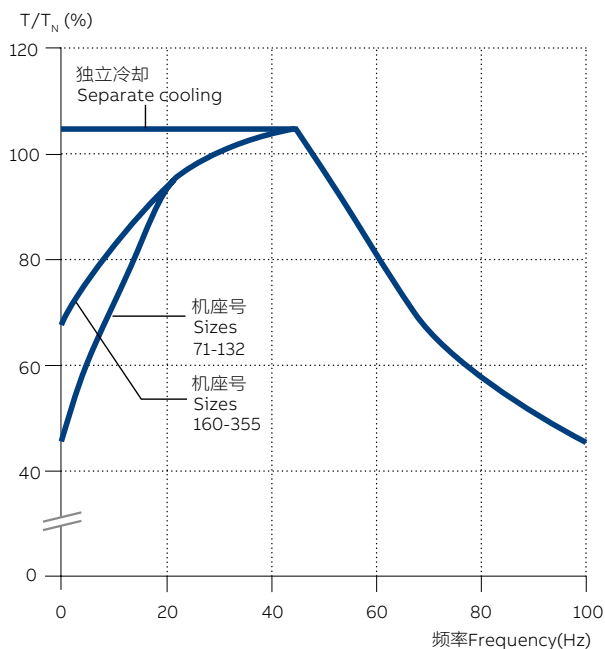Temperature rise F



# 技术数据

## Technical data

# IE5

## 2P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B  
 符合GB 18613-2020 的1 级能效, 符合IEC 60034-30-1:2025 的IE5 效率等级  
 IP55 - IC411 Insulation class F, temperature class B  
 Grade 1 according to GB 18613-2020, IE5 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cosφ	电流 Current		转矩 / Torque			转动惯量 Moment of inertia J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	重量 Weight kg	声压等级 Sound pressure level, L <sub>PA</sub> dB
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub> A	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub> Nm	T <sub>l</sub> / T <sub>N</sub>	T <sub>b</sub> / T <sub>N</sub>			
kW			r/min	380 V 50Hz			CENELEC- 设计 design								
3000 r/min = 2 极 / 2 poles															
0.37	M2QA 71MA 2	3GQA071310---P	2843	81.7	82.2	80.4	0.85	0.8	5.9	1.24	3	3.3	0.00045	11	52
0.55	M2QA 71MLA 2	3GQA071410---P	2858	84.6	84.5	82.9	0.84	1.17	6.6	1.83	3.4	3.9	0.00054	13	52
0.75	M2QA 80MA 2	3GQA081310---P	2914	86.3	86.3	84.9	0.84	1.57	8.4	2.4	2.9	4.1	0.00119	17	55
1.1	M2QA 80MLA 2	3GQA081410---P	2911	87.8	87.8	86.9	0.85	2.2	9	3.6	3.2	4.3	0.00149	20	55
1.5	M2QA 90SLA 2	3GQA091010---P	2906	88.9	89.2	88.1	0.85	3	9	4.9	4.1	4.6	0.00265	32	60
2.2	M2QA 90SLB 2	3GQA091020---P	2909	90.2	90.8	90.3	0.87	4.2	8.8	7.2	4.1	4.4	0.00306	34	60
3	M2QA 100LKA 2	3GQA101810---P	2926	91.1	92.1	92.1	0.89	5.6	8.3	9.7	2.7	3.7	0.00588	48	57
4	M2QA 112MLA 2	3GQA111410---P	2908	91.8	92.7	93.3	0.9	7.3	7.7	13.1	2.4	3.6	0.00922	57	66
5.5	M2QA 132SA 2	3GQA131110---P	2929	92.6	93.2	93.1	0.89	10.1	7.8	17.9	2.6	3.6	0.0126	74	65
7.5	M2QA 132SMA 2	3GQA131210---P	2936	93.3	93.8	93.7	0.9	13.5	9.1	24.3	2.9	4.1	0.0162	88	65
11	M2QA 160MLA 2	3GQA161410---P	2968	94	94.1	93.2	0.89	19.9	8.1	35.3	2.5	3.8	0.0705	162	67
15	M2QA 160MLB 2	3GQA161420---P	2968	94.5	94.6	93.9	0.89	27	9.2	48.2	2.8	3.9	0.0911	186	68
18.5	M2QA 160MLC 2	3GQA161430---P	2960	94.9	95.1	94.7	0.9	32.9	7.9	59.6	2.4	3.5	0.11	217	68
22	M2QA 180MLA 2	3GQA181410---P	2975	95.1	95.2	94.5	0.88	39.9	8.9	70.6	3	3.7	0.148	263	69
30	M2QA 200MLA 2	3GQA201410---P	2976	95.5	95.4	94.7	0.88	54.2	6.6	96.2	2.3	3.4	0.224	330	73
37	M2QA 200MLB 2	3GQA201420---P	2978	95.8	95.8	95.2	0.88	66.6	7.3	118	2.5	3.6	0.269	367	75
45	M2QA 225SMA 2	3GQA221210---P	2984	96	96	95.4	0.92	77.4	8.4	144	2.4	4.5	0.546	480	76
55	M2QA 250SMA 2	3GQA251210---P	2979	96.2	96.2	95.6	0.9	96.5	9.5	176	3.4	5.2	1.11	590	73
75	M2QA 280SMA 2	3GQA281210---P	2979	96.5	96.6	96.2	0.89	132	8.3	240	2.5	3.2	0.78	701	76
90	M2QA 280SMB 2	3GQA281220---P	2981	96.6	96.6	96.2	0.89	159	9.4	288	2.9	3.4	0.945	776	78
110	M2QA 315SMA 2	3GQA311210---P	2985	96.8	96.8	96.4	0.89	193	7.6	351	2	3	1.44	950	72
132	M2QA 315MLA 2	3GQA311410---P	2986	96.9	96.9	96.5	0.88	235	8.6	422	2.3	3.8	1.54	1045	72
160	M2QA 315MLB 2	3GQA311420---P	2984	97	97.1	96.8	0.89	281	8.7	512	2.3	3.8	1.7	1092	73
185	M2QA 315MLC 2	3GQA311430---P	2979	97.1	97.3	97.2	0.89	325	7.4	593	2.2	2.6	1.78	1125	74
200	M2QA 315MLD 2	3GQA311440---P	2977	97.2	97.5	97.5	0.9	347	6.9	641	2	2.2	1.78	1125	75
220	M2QA 355SMA 2	3GQA351210---P	2984	97.2	97.2	96.8	0.88	390	8.4	704	2.1	3.3	3.18	1592	78
250	M2QA 355SMB 2	3GQA351220---P	2982	97.2	97.2	97	0.89	439	7.6	800	2	3	3.18	1592	78
280	M2QA 355MLA 2	3GQA351410---P	2985	97.2	97.2	96.6	0.87	503	7.7	895	2.3	3.6	3.47	1754	79
315	M2QA 355MLB 2	3GQA351420---P	2982	97.2	97.2	96.9	0.87	565	6.9	1008	2.2	3.2	3.47	1754	80
355	M2QA 355MLC 2	3GQA351430---P	2982	97.2	97.4	97.2	0.89	623	7	1136	2.3	3.1	3.74	1808	79

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
 T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
 T<sub>b</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
 T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
 T<sub>b</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE5

## 4P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的1级能效, 符合IEC 60034-30-1:2025 的IE5 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 1 according to GB 18613-2020, IE5 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cos $\phi$	电流 Current		转矩 / Torque			转动惯量 Moment of inertia J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	重量 Weight kg	声压等级 Sound pressure level, L <sub>PA</sub> dB
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub> A	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub> Nm	T <sub>l</sub> / T <sub>N</sub>	T <sub>b</sub> / T <sub>N</sub>			
kW			r/min	380 V 50Hz				CENELEC- 设计 design							
0.25	M2QA 71MLA 4	3GQA072410---P	1442	81.5	81.9	79.8	0.81	0.57	5.7	1.65	2.1	2.9	0.00103	12	43
0.37	M2QA 71MLB 4	3GQA072420---P	1449	84.3	84.2	81.9	0.78	0.85	6.9	2.4	2.6	3.8	0.0014	14	43
0.55	M2QA 80MLA 4	3GQA082410---P	1460	86.7	85.9	83	0.74	1.3	8	3.5	3.5	4.2	0.00285	22	46
0.75	M2QA 80MLB 4	3GQA082420---P	1459	88.2	87.1	84.6	0.75	1.72	8.2	4.9	3.6	4.3	0.00342	25	46
1.1	M2QA 90SLA 4	3GQA092010---P	1468	89.5	89.6	88.1	0.77	2.4	8.3	7.1	2.8	3.8	0.00577	34	44
1.5	M2QA 90SLB 4	3GQA092020---P	1466	90.4	90.6	89.5	0.78	3.2	8.5	9.7	3	3.7	0.00725	40	44
2.2	M2QA 100LKA 4	3GQA102810---P	1475	91.4	91.3	90	0.78	4.6	8.5	14.2	2.6	3.8	0.013	50	54
3	M2QA 100LKB 4	3GQA102820---P	1478	92.1	92.1	90.9	0.79	6.2	9	19.3	2.7	3.8	0.0174	59	54
4	M2QA 112MLA 4	3GQA112410---P	1472	92.8	92.5	91.9	0.81	8	5.4	25.9	2.4	3.9	0.0234	66	57
5.5	M2QA 132SMA 4	3GQA132210---P	1480	93.4	93.7	93.1	0.81	11	8.6	35.4	3.4	3.8	0.0493	92	54
7.5	M2QA 132SMB 4	3GQA132220---P	1480	94	94.2	93.7	0.8	15.1	9.2	48.3	3.7	4.1	0.0627	108	54
11	M2QA 160MLA 4	3GQA162410---P	1484	94.6	94.6	93.9	0.83	21.2	8.8	70.7	2.7	4	0.113	178	59
15	M2QA 160MLB 4	3GQA162420---P	1485	95.1	95.2	94.7	0.83	28.8	8.9	96.4	2.7	4	0.139	208	60
18.5	M2QA 180MLA 4	3GQA182410---P	1485	95.3	95.4	94.7	0.82	35.9	7.4	118	2.5	2.9	0.235	248	66
22	M2QA 180MLB 4	3GQA182420---P	1485	95.5	95.6	95	0.82	42.6	7.3	141	2.4	2.8	0.274	271	67
30	M2QA 200MLA 4	3GQA202410---P	1488	95.9	95.9	95.3	0.82	57.9	7	192	2.5	3.7	0.533	357	64
37	M2QA 225SMA 4	3GQA222210---P	1492	96.1	96.1	95.5	0.83	70.4	7.2	236	2.2	3	0.771	444	62
45	M2QA 225SMB 4	3GQA222220---P	1493	96.3	96.2	95.5	0.82	86.5	8.1	287	2.4	3.4	0.916	487	64
55	M2QA 250SMA 4	3GQA252210---P	1491	96.5	96.4	95.7	0.83	104	8.4	352	2.5	3.7	0.961	540	62
75	M2QA 280SMA 4	3GQA282210---P	1488	96.7	96.9	96.6	0.87	135	8.4	481	3.2	3.2	1.45	718	62
90	M2QA 280SMB 4	3GQA282220---P	1489	96.9	97	96.8	0.86	164	9	577	3.4	3.4	1.7	782	63
110	M2QA 315SMA 4	3GQA312210---P	1489	97	97.3	97.2	0.86	200	7.6	705	2.2	2.8	2.51	996	66
132	M2QA 315MLA 4	3GQA312410---P	1490	97.1	97.2	97	0.86	240	8.1	845	2.6	3.7	3.4	1312	67
160	M2QA 315MLB 4	3GQA312420---P	1491	97.2	97.3	97.1	0.87	288	7.6	1024	2.2	3.6	3.48	1381	67
185	M2QA 315MLC 4	3GQA312430---P	1493	97.3	97.3	96.9	0.84	343	8.8	1183	2.7	4.1	3.83	1453	68
200	M2QA 315MLD 4	3GQA312440---P	1492	97.4	97.5	97.3	0.85	367	8.5	1280	2.6	4.1	3.83	1453	68
220	M2QA 355SMA 4	3GQA352210---P	1493	97.4	97.4	97	0.85	403	7.6	1407	2.2	4	6.29	1703	78
250	M2QA 355MLA 4	3GQA352410---P	1493	97.4	97.4	97	0.85	458	7.9	1599	2.3	3.6	6.78	1860	78
280	M2QA 355MLB 4	3GQA352420---P	1493	97.4	97.4	97.1	0.86	507	7.1	1790	2.2	3.7	6.79	1865	79
315	M2QA 355MLC 4	3GQA352430---P	1494	97.4	97.4	97	0.85	578	8.2	2013	2.3	4	7.34	1946	79
355	M2QA 355MLD 4	3GQA352440---P	1490	97.4	97.6	97.5	0.87	636	7.3	2275	2.5	3.3	7.4	1950	79

产品代码中的两个圆点表示可选的安装方式、电压及频率代码 (见订购信息一页)。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
T<sub>b</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
T<sub>b</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE5

## 6P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B  
 符合GB 18613-2020 的1级能效, 符合IEC 60034-30-1:2025 的IE5 效率等级  
 IP55 - IC411 Insulation class F, temperature class B  
 Grade 1 according to GB 18613-2020, IE5 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cosφ	电流 Current		转矩 / Torque			转动惯量 Moment of inertia J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	重量 Weight kg	声压等级 Sound pressure level, L <sub>PA</sub> dB
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub> A	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub> Nm	T <sub>l</sub> / T <sub>N</sub>	T <sub>B</sub> / T <sub>N</sub>			
1000 r/min = 6 极 / 6 poles			380 V 50Hz			CENELEC- 设计 design									
0.18	M2QA 71MLA 6	3GQA073410---P	931	74.6	74.6	71	0.74	0.49	3.8	1.84	2.1	2.5	0.00109	12	37
0.25	M2QA 71MLB 6	3GQA073420---P	934	78.1	78.2	75.3	0.71	0.68	4.1	2.5	2.5	2.8	0.00148	14	37
0.37	M2QA 80MLA 6	3GQA083410---P	956	81.6	81	77.9	0.72	0.95	6	3.6	3	3.3	0.00295	22	56
0.55	M2QA 80MLB 6	3GQA083420---P	957	84.2	82.4	79.7	0.71	1.39	6.1	5.4	3.1	3.4	0.00354	25	56
0.75	M2QA 90SLA 6	3GQA093010---P	974	85.7	84.5	80.6	0.74	1.79	6.4	7.3	2.4	3.3	0.00604	32	48
1.1	M2QA 90SLB 6	3GQA093020---P	969	87.2	87	84.9	0.73	2.6	5.7	10.8	2.2	3	0.00731	36	48
1.5	M2QA 100LKA 6	3GQA103810---P	975	88.4	88.6	87.3	0.75	3.4	6.4	14.6	2.6	3.1	0.0154	44	47
2.2	M2QA 112MLA 6	3GQA113410---P	973	89.7	89.9	89.4	0.75	4.9	5.4	21.5	1.8	2.7	0.0198	57	48
3	M2QA 132SA 6	3GQA133110---P	987	90.6	90.6	89.4	0.73	6.8	7.4	29	2.1	3.1	0.0472	74	61
4	M2QA 132SMA 6	3GQA133210---P	987	91.4	91.4	90.2	0.73	9.1	7.9	38.7	2.4	3.2	0.0596	89	61
5.5	M2QA 132SMB 6	3GQA133220---P	987	92.2	92.3	91.3	0.74	12.2	8	53.2	2.3	3.3	0.0811	110	61
7.5	M2QA 160MLA 6	3GQA163410---P	991	92.9	92.9	91.9	0.72	17	7.5	72.2	1.6	3.4	0.149	163	57
11	M2QA 160MLB 6	3GQA163420---P	992	93.7	93.6	92.5	0.71	25.1	8.3	105	2	3.7	0.208	206	58
15	M2QA 180MLA 6	3GQA183410---P	990	94.3	94.4	93.8	0.76	31.7	7.4	144	2.4	3.1	0.305	246	63
18.5	M2QA 200MLA 6	3GQA203410---P	991	94.6	94.8	94.2	0.82	36.2	8	178	2.3	3.8	0.463	307	63
22	M2QA 200MLB 6	3GQA203420---P	992	94.9	95	94.4	0.81	43.4	8.8	211	2.7	4.2	0.56	343	63
30	M2QA 225SMA 6	3GQA223210---P	993	95.3	95.3	94.5	0.8	59.7	8.9	288	2.5	4	0.921	466	65
37	M2QA 250SMA 6	3GQA253210---P	994	95.6	95.7	95	0.83	70.8	7.2	355	2.2	2.8	1.46	596	61
45	M2QA 280SMA 6	3GQA283210---P	993	95.8	96	95.7	0.85	83.9	8.2	432	3	2.9	2.25	698	66
55	M2QA 280SMB 6	3GQA283220---P	993	96	96.2	95.9	0.85	102	8.6	528	3.2	3	2.72	778	68
75	M2QA 315SMA 6	3GQA313210---P	994	96.3	96.5	96.4	0.83	142	7.6	720	2.1	2.7	4.43	952	61
90	M2QA 315MLA 6	3GQA313410---P	993	96.5	96.8	96.8	0.84	168	6.9	865	2.1	2.9	5.01	1067	61
110	M2QA 315MLB 6	3GQA313420---P	993	96.6	96.9	96.8	0.84	206	7.3	1057	2.2	3	5.71	1149	62
132	M2QA 315MLC 6	3GQA313430---P	993	96.8	97.1	97	0.84	247	7.5	1269	2.4	3.2	6.74	1352	62
160	M2QA 355SMA 6	3GQA353210---P	995	96.9	96.9	96.6	0.85	295	8.4	1535	2.4	3.2	10.5	1767	72
185	M2QA 355SMB 6	3GQA353220---P	995	97	97.1	96.8	0.85	340	8.3	1775	2.4	3.4	10.5	1767	72
200	M2QA 355MLA 6	3GQA353410---P	995	97	97.1	96.8	0.84	372	7.6	1919	2.4	3.6	11.1	1897	73
220	M2QA 355MLB 6	3GQA353420---P	995	97	97.1	96.9	0.83	415	7.6	2111	2.5	3.6	11.6	1949	73
250	M2QA 355MLC 6	3GQA353430---P	995	97	97.2	97	0.83	471	7.4	2399	2.5	3.5	12.1	2007	74
280	M2QA 355MLD 6	3GQA353440---P	995	97	97.2	97	0.84	522	7.7	2687	2.5	3.5	12.6	2053	74
315	M2QA 355LKA 6	3GQA353810---P	994	97	97.2	97	0.83	594	6.1	3026	2.4	2.4	13.8	2212	76
355	M2QA 355LKB 6	3GQA353820---P	995	97	97.2	96.9	0.81	686	7	3407	2.4	3.2	14.6	2277	76

产品代码中的两个圆点表示可选的安装方式、电压及频率代码 (见订购信息一页)。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
 T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
 T<sub>B</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
 T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
 T<sub>B</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE5

## 8P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的1 级能效, 符合IEC 60034-30-1:2025 的IE5 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 1 according to GB 18613-2020, IE5 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cos $\phi$	电流 Current		转矩 / Torque			转动惯量 Moment of inertia J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	重量 Weight kg	声压等级 Sound pressure level, L <sub>PA</sub> dB
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub> A	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub> Nm	T <sub>l</sub> / T <sub>N</sub>	T <sub>b</sub> / T <sub>N</sub>			
kW			r/min	380 V 50Hz			CENELEC- 设计 design								
0.18	M2QA 80MLA 8	3GQA084410---P	710	71.9	67.9	61.9	0.6	0.63	3.7	2.4	1.9	2.5	0.00316	23	50
0.25	M2QA 80MLB 8	3GQA084420---P	709	75.2	71.9	66.6	0.61	0.82	3.9	3.3	2	2.5	0.0038	27	50
0.37	M2QA 90SLA 8	3GQA094010---P	717	78.4	76.5	72	0.62	1.15	3.8	4.9	1.7	2.3	0.00507	27	47
0.55	M2QA 90SLB 8	3GQA094020---P	715	80.6	79.2	75.4	0.62	1.67	3.8	7.3	1.7	2.3	0.00595	30	47
0.75	M2QA 100LKA 8	3GQA104810---P	706	82	81.9	79.6	0.68	2	4.6	10.1	2.3	3.9	0.019	48	47
1.1	M2QA 100LKB 8	3GQA104820---P	706	84	83.9	82.1	0.68	2.9	4.7	14.8	2.5	2.9	0.025	58	48
1.5	M2QA 112MLA 8	3GQA114410---P	718	85.5	85.3	83.6	0.67	3.9	5.4	19.9	2.4	3	0.0331	65	54
2.2	M2QA 132SMA 8	3GQA134210---P	725	87.2	86.8	85.3	0.68	5.6	5.6	28.9	2.1	2.7	0.0631	86	63
3	M2QA 132SMB 8	3GQA134220---P	725	88.4	88.1	86.9	0.69	7.4	5.6	39.5	2.1	2.7	0.0823	103	63
4	M2QA 160MA 8	3GQA164310---P	736	89.4	88.5	86.4	0.73	9.3	7.5	51.8	1.6	2.4	0.117	133	58
5.5	M2QA 160MLA 8	3GQA164410---P	736	90.4	89.5	87.7	0.74	12.4	7.6	71.3	1.6	2.4	0.149	159	58
7.5	M2QA 160MLB 8	3GQA164420---P	736	91.3	90.8	89.5	0.72	17.3	7.7	97.3	1.7	2.6	0.174	180	58
11	M2QA 180MLA 8	3GQA184410---P	737	92.2	92.1	91.5	0.75	24.1	6.1	142	2.3	3	0.33	253	63
15	M2QA 200MLA 8	3GQA204410---P	741	92.9	93.8	93	0.74	33.1	5.7	193	1.9	2.6	0.431	271	56
18.5	M2QA 225SMA 8	3GQA224210---P	740	93.3	93.8	93.4	0.8	37.6	7.3	238	2.5	3.1	0.782	331	60
22	M2QA 225SMB 8	3GQA224220---P	741	93.6	94	93.6	0.8	44.6	7.5	283	2.5	3.2	0.941	369	60
30	M2QA 250SMA 8	3GQA254210---P	744	94.1	93.7	93.1	0.76	63.7	5.7	385	2.3	2.5	1.95	591	60
37	M2QA 280SMA 8	3GQA284210---P	743	94.4	93.9	93.3	0.75	79.4	7.2	475	1.8	3.2	2.08	608	56
45	M2QA 280SMB 8	3GQA284220---P	743	94.7	94.4	93.8	0.76	94.9	7.4	578	1.9	3.3	2.58	737	56
55	M2QA 315SMA 8	3GQA314210---P	747	94.9	94.5	93.7	0.8	110	7.6	703	1.3	3.7	4.36	967	68
75	M2QA 315MLA 8	3GQA314410---P	746	95.3	95.3	94.8	0.8	149	7.5	960	1.4	3.6	5.75	1131	68
90	M2QA 315MLB 8	3GQA314420---P	746	95.5	95.5	95.1	0.8	178	7.7	1152	1.5	3.6	6.93	1349	68
110	M2QA 315MLC 8	3GQA314430---P	746	95.7	95.8	95.4	0.8	218	7.7	1408	1.6	3.6	7.75	1460	68
132	M2QA 355SMA 8	3GQA354210---P	746	95.9	95.7	95.1	0.77	271	7.9	1689	1.8	3.8	9.72	1613	69
160	M2QA 355SMB 8	3GQA354220---P	745	96.1	96.4	96.3	0.8	316	7	2050	1.6	3.3	10.8	1727	69
185	M2QA 355MLA 8	3GQA354410---P	745	96.2	96.2	95.8	0.78	374	7.6	2371	1.6	3.5	12.3	1943	69
200	M2QA 355MLB 8	3GQA354420---P	744	96.3	96.4	96.2	0.79	399	7.1	2567	1.6	3.3	12.3	1943	69
220	M2QA 355MLC 8	3GQA354430---P	745	96.3	96.2	95.7	0.76	456	7.6	2819	1.7	3.6	13	2023	69
250	M2QA 355MLD 8	3GQA354440---P	744	96.3	96.4	96.3	0.78	505	6.8	3208	1.6	3.2	13	2023	69

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
T<sub>b</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
T<sub>b</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE4

## 2P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的2级能效, 符合IEC 60034-30-1:2025 的IE4 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 2 according to GB 18613-2020, IE4 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cosφ	电流 Current			转矩 / Torque			转动惯量 Moment of inertia J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	重量 Weight kg	声压等级 Sound pressure level, L <sub>PA</sub> dB
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub> A	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub> Nm	T <sub>l</sub> / T <sub>N</sub>	T <sub>B</sub> / T <sub>N</sub>				
kW			r/min	380 V 50Hz			CENELEC- 设计 design									
0.37	M2QA 71MA 2	3GQA071310---N	2812	78.1	75.2	78.3	0.86	0.83	4.7	1.25	2.6	2.8	0.00036	10	52	
0.55	M2QA 71MLA 2	3GQA071410---N	2846	81.5	79.5	81	0.84	1.22	5.5	1.84	2.9	3.2	0.00048	12	52	
0.75	M2QA 80MA 2	3GQA081310---N	2890	83.5	84.3	83.3	0.86	1.58	6.9	2.4	2.3	3.3	0.00101	17	55	
1.1	M2QA 80MLA 2	3GQA081410---N	2892	85.2	85.9	85.1	0.87	2.2	7.6	3.6	2.6	3.6	0.00132	19	55	
1.5	M2QA 90SA 2	3GQA091110---N	2890	86.5	87.5	87	0.87	3	7.2	4.9	3	3.9	0.00229	28	60	
2.2	M2QA 90SLA 2	3GQA091010---N	2870	88	89	88.7	0.87	4.3	6.5	7.3	2.8	3.6	0.00306	33	60	
3	M2QA 100LKA 2	3GQA101810---N	2923	89.1	89.7	89.1	0.89	5.7	7.9	9.8	2.6	3.4	0.00495	44	57	
4	M2QA 112MLA 2	3GQA111410---N	2909	90	91.1	91.1	0.89	7.5	6.8	13.1	2.4	3.1	0.00728	51	66	
5.5	M2QA 132SA 2	3GQA131110---N	2900	90.9	91.3	91.4	0.87	10.4	7.7	18.1	2.2	3.3	0.0122	70	65	
7.5	M2QA 132SMA 2	3GQA131210---N	2900	91.7	92.8	93	0.9	13.8	7.6	24.6	2.2	3.2	0.0148	83	65	
11	M2QA 160MLA 2	3GQA161410---N	2954	92.6	93.1	92.8	0.87	20.7	6.8	35.5	2	2.9	0.0509	132	65	
15	M2QA 160MLB 2	3GQA161420---N	2953	93.3	93.9	93.8	0.89	27.4	7.1	48.5	2.2	3	0.0641	147	65	
18.5	M2QA 160MLC 2	3GQA161430---N	2955	93.7	94.3	94.3	0.89	33.7	7.5	59.7	2.3	3.1	0.0745	159	65	
22	M2QA 180MLA 2	3GQA181410---N	2958	94	94.6	94.6	0.88	40.4	7.5	71	2.3	3.3	0.089	192	68	
30	M2QA 200MLA 2	3GQA201410---N	2966	94.5	94.6	94.1	0.89	54.1	6.3	96.5	2	2.8	0.222	289	73	
37	M2QA 200MLB 2	3GQA201420---N	2962	94.8	95	94.7	0.89	66.6	6.3	119	2	2.9	0.23	296	73	
45	M2QA 225SMA 2	3GQA221210---N	2980	95	95.2	94.7	0.89	80.8	7.5	144	2.2	3.3	0.358	338	74	
55	M2QA 250SMA 2	3GQA251210---N	2974	95.3	95.4	95	0.9	97.4	7.7	176	3	3.2	0.482	432	79	
75	M2QA 280SMA 2	3GQA281210---N	2977	95.6	95.4	94.4	0.88	135	7.2	240	1.9	3	0.678	578	74	
90	M2QA 280SMB 2	3GQA281220---N	2974	95.8	95.9	95.4	0.89	160	8.4	288	1.8	2.6	0.775	676	74	
110	M2QA 315SMA 2	3GQA311210---N	2980	96	96	95.3	0.87	200	6.2	352	1.6	3	1.15	828	76	
132	M2QA 315SMB 2	3GQA311220---N	2982	96.2	96.1	95.5	0.88	236	7.5	422	2.1	3.4	1.36	906	77	
160	M2QA 315MLA 2	3GQA311410---N	2980	96.3	96.2	95.5	0.89	283	6.9	512	2	3.1	1.56	1037	77	
185	M2QA 315MLC 2	3GQA311430---N	2983	96.5	96.5	96.1	0.89	327	6.8	592	2.1	3.3	1.65	1062	77	
200	M2QA 315MLB 2	3GQA311420---N	2980	96.5	96.6	96.3	0.89	353	6.3	640	1.9	3	1.73	1099	77	
220	M2QA 355SMC 2	3GQA351230---N	2985	96.5	96.3	95.6	0.89	389	8.1	703	2.1	4.1	2.94	1493	79	
250	M2QA 355SMA 2	3GQA351210---N	2983	96.5	96.4	95.8	0.9	437	7.6	800	2	3.8	2.94	1495	79	
280	M2QA 355SMD 2	3GQA351240---N	2983	96.5	96.4	95.7	0.89	495	7.7	896	2.3	3.8	3.2	1562	82	
315	M2QA 355SMB 2	3GQA351220---N	2982	96.5	96.5	95.9	0.89	557	7.1	1008	2.2	3.3	3.39	1627	82	
355	M2QA 355MLA 2	3GQA351410---N	2982	96.5	96.5	96	0.89	628	7.1	1136	2.2	3.2	3.41	1698	82	

产品代码中的两个圆点表示可选的安装方式、电压及频率代码 (见订购信息一页)。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
T<sub>B</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
T<sub>B</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE4

## 4P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的2 级能效, 符合IEC 60034-30-1:2025 的IE4 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 2 according to GB 18613-2020, IE4 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cos $\phi$	电流 Current		转矩 / Torque			转动惯量 Moment of inertia J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	重量 Weight kg	声压等级 Sound pressure level, L <sub>PA</sub> dB
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub> A	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub> Nm	T <sub>l</sub> / T <sub>N</sub>	T <sub>b</sub> / T <sub>N</sub>			
kW			r/min	380 V 50Hz			CENELEC- 设计 design								
0.25	M2QA 71MA 4	3GQA072310---N	1448	77.9	77.2	72.9	0.77	0.63	5.8	1.64	2.2	3.1	0.0009	11	43
0.37	M2QA 71MLA 4	3GQA072410---N	1456	81.1	81	75.7	0.77	0.9	7.1	2.4	2.4	3.7	0.00129	13	43
0.55	M2QA 80MLA 4	3GQA082410---N	1447	83.9	83.9	81.7	0.84	1.18	6.3	3.6	2.4	3	0.00236	19	46
0.75	M2QA 80MLB 4	3GQA082420---N	1458	85.7	83.8	80.3	0.77	1.72	7.7	4.9	3.3	4	0.00277	22	46
1.1	M2QA 90SLA 4	3GQA092010---N	1452	87.2	87.5	86.2	0.82	2.3	6.8	7.2	2.5	3.3	0.00507	32	44
1.5	M2QA 90SLB 4	3GQA092020---N	1448	88.2	88.9	88.3	0.8	3.2	7	9.8	2.6	3.2	0.00577	35	44
2.2	M2QA 100LKA 4	3GQA102810---N	1467	89.5	90.8	90.5	0.78	4.7	7.6	14.3	2.1	3.3	0.0103	40	54
3	M2QA 100LKB 4	3GQA102820---N	1465	90.4	91.6	90.8	0.8	6.3	7.6	19.5	2.1	3.2	0.0136	48	54
4	M2QA 112MLA 4	3GQA112410---N	1471	91.1	91.3	90.3	0.81	8.2	7.8	25.9	2.7	3.6	0.0196	58	57
5.5	M2QA 132SA 4	3GQA132110---N	1475	91.9	92.4	91.9	0.81	11.2	7.9	35.6	2.7	3.4	0.04	77	54
7.5	M2QA 132SMA 4	3GQA132210---N	1471	92.6	92.7	92.6	0.82	15	7.9	48.6	3.4	3.7	0.051	93	54
11	M2QA 160MLA 4	3GQA162410---N	1481	93.3	93.6	93.1	0.85	21	8.7	70.9	2.6	3.6	0.0985	153	61
15	M2QA 160MLB 4	3GQA162420---N	1480	93.9	94.3	94	0.86	28.2	8.6	96.7	2.7	3.7	0.132	186	61
18.5	M2QA 180MLA 4	3GQA182410---N	1482	94.2	94.6	94.4	0.84	35.5	7.3	119	2.8	2.9	0.173	200	61
22	M2QA 180MLB 4	3GQA182420---N	1482	94.5	94.9	94.8	0.84	42.1	7.5	141	2.9	3	0.216	224	61
30	M2QA 200MLA 4	3GQA202410---N	1484	94.9	95.3	95	0.83	57.8	7.8	193	2.4	3.2	0.395	282	64
37	M2QA 225SMA 4	3GQA222210---N	1487	95.2	95.4	95	0.84	70.2	8	237	2.2	3.3	0.556	325	63
45	M2QA 225SMB 4	3GQA222220---N	1487	95.4	95.7	95.4	0.85	84.3	8	288	2.2	3.3	0.605	344	63
55	M2QA 250SMA 4	3GQA252210---N	1484	95.7	96	95.9	0.86	101	7.7	353	2.3	3.1	0.637	410	68
75	M2QA 280SMA 4	3GQA282210---N	1484	96	96.2	95.8	0.85	139	6.7	482	2.5	2.8	1.2	664	63
90	M2QA 280SMB 4	3GQA282220---N	1484	96.1	96.4	96.2	0.85	167	7.7	579	2.9	3.1	1.41	712	63
110	M2QA 315SMA 4	3GQA312210---N	1489	96.3	96.4	96.1	0.86	201	7.2	705	2.2	2.8	2.14	897	66
132	M2QA 315SMB 4	3GQA312220---N	1489	96.4	96.5	96.2	0.86	241	7.6	846	2.4	3.1	2.4	952	66
160	M2QA 315MLA 4	3GQA312410---N	1488	96.6	96.8	96.5	0.87	289	7.5	1026	2.5	3.1	2.84	1103	67
185	M2QA 315MLC 4	3GQA312430---N	1489	96.7	96.9	96.7	0.87	334	7.6	1186	2.3	3.5	3.62	1334	68
200	M2QA 315MLB 4	3GQA312420---N	1488	96.7	97	96.9	0.88	357	7.1	1283	2.2	3.2	3.62	1334	68
220	M2QA 355SMC 4	3GQA352230---N	1492	96.7	96.8	96.5	0.85	406	7.1	1408	2.4	4	5.57	1533	74
250	M2QA 355SMA 4	3GQA352210---N	1489	96.7	97	96.9	0.87	452	7.2	1603	2.4	2.6	5.92	1594	74
280	M2QA 355SMD 4	3GQA352240---N	1491	96.7	96.8	96.5	0.86	511	6.8	1793	2.3	3.7	6.56	1638	76
315	M2QA 355SMB 4	3GQA352220---N	1489	96.7	97	96.9	0.87	569	7.1	2020	2.5	2.6	6.56	1648	76
355	M2QA 355MLA 4	3GQA352410---N	1490	96.7	96.9	96.7	0.87	641	6.8	2275	2.4	3.7	7.78	1944	76

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

The two bullet s in the product code indicate choice of mounting arrangements, voltage and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
T<sub>b</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
T<sub>b</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE4

## 6P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B  
 符合GB 18613-2020 的2 级能效, 符合IEC 60034-30-1:2025 的IE4 效率等级  
 IP55 - IC411 Insulation class F, temperature class B  
 Grade 2 according to GB 18613-2020, IE4 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cosφ	电流 Current		转矩 / Torque			转动惯量 Moment of inertia J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	重量 Weight kg	声压等级 Sound pressure level, L <sub>PA</sub> dB
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub> A	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub> Nm	T <sub>l</sub> / T <sub>N</sub>	T <sub>B</sub> / T <sub>N</sub>			
kW			r/min	380 V 50Hz			CENELEC- 设计 design								
1000 r/min = 6 极 / 6 poles															
0.18	M2QA 71MA 6	3GQA073310---N	939	70.1	68.9	63.2	0.72	0.54	3.9	1.83	2.1	2.4	0.00096	11	37
0.25	M2QA 71MLA 6	3GQA073410---N	933	74.1	72.6	69.2	0.74	0.69	4.2	2.5	2.2	2.7	0.00137	13	37
0.37	M2QA 80MLA 6	3GQA083410---N	952	78	78.6	75.4	0.77	0.93	5.5	3.7	2.5	2.9	0.00244	19	56
0.55	M2QA 80MLB 6	3GQA083420---N	954	80.9	79.6	76.2	0.74	1.39	5.9	5.5	2.9	3.2	0.00308	23	56
0.75	M2QA 90SA 6	3GQA093110---N	964	82.7	81.5	77.6	0.75	1.83	5.8	7.4	1.9	2.9	0.00426	25	48
1.1	M2QA 90SLA 6	3GQA093010---N	964	84.5	83.7	80.5	0.74	2.6	5.7	10.8	2	3	0.00559	31	48
1.5	M2QA 100LKA 6	3GQA103810---N	969	85.9	86.1	85	0.76	3.4	6.9	14.7	2.3	3.3	0.0133	45	47
2.2	M2QA 112MLA 6	3GQA113410---N	973	87.4	87.4	85.6	0.73	5.2	5.2	21.5	1.6	2.5	0.0154	48	48
3	M2QA 132SA 6	3GQA133110---N	981	88.6	89.9	89	0.72	7.1	6.7	29.2	2	3	0.0394	68	61
4	M2QA 132SMA 6	3GQA133210---N	981	89.5	90.7	90	0.73	9.3	7	38.9	2.1	3.1	0.0502	81	61
5.5	M2QA 132SMB 6	3GQA133220---N	979	90.5	91.4	91.1	0.75	12.3	6.9	53.6	2.1	3	0.0655	94	61
7.5	M2QA 160MLA 6	3GQA163410---N	989	91.3	91.5	90.6	0.76	16.4	7.5	72.4	2	3	0.132	146	62
11	M2QA 160MLB 6	3GQA163420---N	987	92.3	92.9	92.4	0.79	22.9	8.3	106	1.8	2.7	0.181	185	62
15	M2QA 180MLA 6	3GQA183410---N	985	92.9	93.2	92.6	0.83	29.5	7.1	145	2.4	3.4	0.274	215	60
18.5	M2QA 200MLA 6	3GQA203410---N	988	93.4	93.5	92.7	0.8	37.6	7.8	178	2.5	3.1	0.371	255	59
22	M2QA 200MLB 6	3GQA203420---N	989	93.7	93.8	93	0.82	43.5	8.1	212	2.5	3.2	0.459	285	59
30	M2QA 225SMA 6	3GQA223210---N	991	94.2	94.4	93.9	0.81	59.7	8.2	289	2.5	3.2	0.662	352	64
37	M2QA 250SMA 6	3GQA253210---N	992	94.5	94.8	94.6	0.8	74.4	7.9	356	3.1	3.1	1.35	447	61
45	M2QA 280SMA 6	3GQA283210---N	989	94.8	95.1	94.7	0.85	84.8	7.5	434	2.7	2.6	1.87	590	63
55	M2QA 280SMB 6	3GQA283220---N	988	95.1	95.5	95.3	0.85	103	6.5	531	2.6	2.5	2.07	679	63
75	M2QA 315SMA 6	3GQA313210---N	993	95.4	95.5	95.1	0.83	143	7.2	721	2.5	2.9	4.23	916	67
90	M2QA 315SMB 6	3GQA313220---N	993	95.6	95.8	95.4	0.82	174	7.3	865	2.5	2.8	4.57	924	67
110	M2QA 315MLA 6	3GQA313410---N	993	95.8	96.1	95.9	0.83	210	7	1057	2.2	2.6	5.39	1103	68
132	M2QA 315MLB 6	3GQA313420---N	992	96	96.3	96.1	0.84	248	6.3	1270	2.3	2.8	6.43	1291	68
160	M2QA 355SMA 6	3GQA353210---N	994	96.2	96.3	96	0.83	304	7	1537	2.3	2.9	8.48	1552	70
185	M2QA 355SMC 6	3GQA353230---N	993	96.3	96.5	96.3	0.84	347	5.7	1779	1.7	3.1	9.34	1641	70
200	M2QA 355SMB 6	3GQA353220---N	994	96.3	96.4	96	0.82	384	7.5	1921	2.3	2.8	10.1	1693	70
220	M2QA 355MLB 6	3GQA353420---N	992	96.5	96.8	96.7	0.84	412	5.4	2117	1.7	2.9	10.7	1834	70
250	M2QA 355MLA 6	3GQA353410---N	994	96.5	96.8	96.6	0.84	468	5.8	2401	1.8	3.1	11.7	1991	70
280	M2QA 355MLC 6	3GQA353430---N	993	96.6	96.8	96.7	0.83	530	5.8	2692	1.9	3.1	12.2	2007	70
315	M2QA 355MLD 6	3GQA353440---N	994	96.6	96.9	96.8	0.84	589	7.6	3026	2.2	2.8	12.6	2090	73
355	M2QA 355LKA 6	3GQA353810---N	995	96.6	96.8	96.5	0.81	689	7	3407	2.4	3.2	14.6	2277	76

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
 T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
 T<sub>B</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
 T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
 T<sub>B</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE4

## 8P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的2级能效, 符合IEC 60034-30-1:2025 的IE4 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 2 according to GB 18613-2020, IE4 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cos $\phi$	电流 Current		转矩 / Torque			转动惯量 Moment of inertia J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	重量 Weight kg	声压等级 Sound pressure level, L <sub>PA</sub> dB
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub> A	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub> Nm	T <sub>l</sub> / T <sub>N</sub>	T <sub>B</sub> / T <sub>N</sub>			
kW			r/min	380 V 50Hz				CENELEC- 设计 design							
0.18	M2QA 80MA 8	3GQA084310---N	706	67.2	64.6	57.6	0.6	0.67	3.4	2.4	1.7	2.2	0.00201	18	48
0.25	M2QA 80MLA 8	3GQA084410---N	701	70.8	69.1	63.3	0.62	0.86	3.5	3.4	1.7	2.1	0.00265	22	48
0.55	M2QA 90SLA 8	3GQA094010---N	719	77	75.4	70	0.61	1.77	3.5	7.3	1.6	2.4	0.00469	27	55
0.37	M2QA 90SA 8	3GQA094110---N	721	74.3	72.1	66.3	0.62	1.22	3.6	4.9	1.6	2.4	0.00424	23	55
0.75	M2QA 100LKA 8	3GQA104810---N	698	78.4	78.8	75.9	0.67	2.1	4.1	10.2	2.1	2.5	0.0115	35	57
1.1	M2QA 100LKB 8	3GQA104820---N	701	80.8	81.9	79.7	0.68	3	4.4	14.9	2.3	2.7	0.02	48	57
1.5	M2QA 112MLA 8	3GQA114410---N	709	82.6	83.8	82.3	0.7	3.9	4.7	20.2	1.9	2.5	0.025	53	52
2.2	M2QA 132SA 8	3GQA134110---N	724	84.5	84.2	82.4	0.72	5.4	4.8	29	1.8	2.4	0.041	66	57
3	M2QA 132SMA 8	3GQA134210---N	723	85.9	85.9	84.6	0.72	7.3	5	39.6	1.8	2.5	0.0552	82	57
4	M2QA 160MA 8	3GQA164310---N	735	87.1	85.9	83.1	0.72	9.6	6.2	51.9	2.2	3.2	0.101	124	58
5.5	M2QA 160MLA 8	3GQA164410---N	736	88.3	87.4	85.4	0.73	12.9	6.5	71.3	1.9	3	0.136	151	58
7.5	M2QA 160MLB 8	3GQA164420---N	734	89.3	88.6	87.2	0.75	17	6.2	97.5	2.1	3.2	0.162	165	58
11	M2QA 180MLA 8	3GQA184410---N	735	90.4	90.2	89.6	0.74	24.9	5.5	142	1.8	2.5	0.278	215	65
15	M2QA 200MLA 8	3GQA204410---N	736	91.2	92.9	92.7	0.75	33.3	5.4	194	1.8	2.4	0.377	250	58
18.5	M2QA 225SMA 8	3GQA224210---N	741	91.7	91.5	90.7	0.77	39.8	7.4	238	2.5	3.2	0.614	288	65
22	M2QA 225SMB 8	3GQA224220---N	742	92.1	91.6	90.8	0.76	47.7	7.7	283	2.6	3.3	0.71	311	65
30	M2QA 250SMA 8	3GQA254210---N	739	92.7	92.6	92.3	0.77	63.8	5	387	2	2.2	1.36	439	60
37	M2QA 280SA 8	3GQA284110---N	739	93.1	92.6	91.8	0.8	75.4	6.9	478	1.7	2.6	1.61	519	62
45	M2QA 280SMA 8	3GQA284210---N	739	93.4	92.8	92	0.82	89.2	7	581	1.6	2.6	1.9	572	62
55	M2QA 315SMA 8	3GQA314210---N	741	93.7	93.5	92.8	0.81	110	6.5	708	1.6	3	3.74	821	68
75	M2QA 315SMB 8	3GQA314220---N	741	94.2	94.2	93.8	0.82	147	6.4	966	1.6	3	4.39	892	68
90	M2QA 315MLA 8	3GQA314410---N	741	94.4	94.4	94.1	0.82	176	6.8	1159	1.7	3.1	5.31	1041	68
110	M2QA 315MLB 8	3GQA314420---N	741	94.7	94.8	94.5	0.82	215	7.3	1417	1.9	3.3	5.94	1114	68
132	M2QA 355SMA 8	3GQA354210---N	743	94.9	95.6	95.5	0.81	260	6.8	1696	1.3	2.3	7.47	1369	69
160	M2QA 355SMB 8	3GQA354220---N	743	95.1	95.6	95.5	0.79	323	6.4	2056	1.6	2.6	9.13	1523	69
185	M2QA 355SMC 8	3GQA354230---N	742	95.3	95.5	95.1	0.8	368	7.2	2380	1.5	2.5	10.6	1678	69
200	M2QA 355SMD 8	3GQA354240---N	741	95.4	96	96.2	0.81	393	6.7	2577	1.4	2.3	10.6	1678	69
220	M2QA 355MLA 8	3GQA354410---N	742	95.4	95.6	95.4	0.79	443	5.9	2831	1.4	2.5	12.6	1956	72
250*	M2QA 355MLB 8	3GQA354420---N	741	95.4	95.9	95.7	0.8	497	5.2	3221	1.3	2.2	12.6	1956	72

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

\* 温升等级 F

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
T<sub>B</sub> / T<sub>N</sub> = 最大转矩

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

\* temperature rise class F

I<sub>s</sub> / I<sub>N</sub> = Starting current  
T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
T<sub>B</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE3

## 2P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的3级能效, 符合IEC 60034-30-1:2025 的IE3 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 3 according to GB 18613-2020, IE3 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor	电流 Current		转矩 / Torque			转动惯量 Moment of Weight inertia	重量 Weight	声压等级 Sound pressure level
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		$I_N$	$I_s/I_N$	$T_N$	$T_l/T_N$	$T_b/T_N$			
kW			r/min	100%	75%	50%	cosφ	A		$T_N$	$T_l/T_N$	$T_b/T_N$	J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	kg	LPA dB
<b>3000 r/min = 2 极 / 2 poles</b>			<b>380V</b>	<b>50Hz</b>											
<b>CENELEC-设计 design</b>															
0.37	M2QA 71MA 2	3GQA071310...F	2790	73.8	75.5	73.7	0.83	0.91	6.1	1.26	2.4	2.9	0.00033	10	50
0.55	M2QA 71MB 2	3GQA071320...F	2781	77.8	79.3	77.8	0.84	1.27	5.7	1.88	2.4	2.8	0.00038	11	49
0.75	M2QA 80MA 2	3GQA081310...F	2838	80.7	81.8	81.3	0.87	1.62	6.3	2.5	2.5	3.2	0.00078	17	60
1.1	M2QA 80MB 2	3GQA081320...F	2851	82.7	83.9	83.7	0.89	2.2	6.2	3.6	2.6	3	0.00098	19	60
1.5	M2QA 90SA 2	3GQA091110...F	2850	84.2	85.8	85.8	0.88	3	6.4	5	2.5	3.1	0.00186	23	60
2.2	M2QA 90SLA 2	3GQA091010...F	2870	85.9	86.9	86.2	0.86	4.5	7.3	7.3	3	3.7	0.00229	26	61
3	M2QA 100LKA 2	3GQA101810...F	2907	87.1	88.4	88.4	0.89	5.8	7.3	9.8	1.9	3.1	0.00399	38	63
4	M2QA 112MLA 2	3GQA111410...F	2914	88.1	89.4	90.1	0.9	7.6	7.1	13.1	2.1	3.3	0.00672	44	63
5.5	M2QA 132SMA 2	3GQA131210...F	2907	89.2	90.8	91	0.89	10.5	6.9	18	2.1	3.3	0.0105	62	66
7.5	M2QA 132SMB 2	3GQA131220...F	2932	90.1	91.4	91.5	0.89	14.2	8.1	24.4	2.6	3.9	0.0128	68	67
11	M2QA 160MA 2	3GQA161310...F	2944	91.2	91.6	91.1	0.9	20.4	5.8	35.6	1.5	2.7	0.0483	126	70
15	M2QA 160MB 2	3GQA161320...F	2949	91.9	92.2	91.7	0.9	27.6	6.8	48.5	1.8	3.1	0.0584	136	70
18.5	M2QA 160MLA 2	3GQA161410...F	2951	92.4	92.6	92.1	0.9	33.8	7.5	59.8	2.1	3.3	0.0685	155	72
22	M2QA 180MA 2	3GQA181310...F	2958	92.7	92.9	92.5	0.89	40.5	7.6	71	2.2	3.3	0.091	185	68
30	M2QA 200MLA 2	3GQA201410...F	2959	93.3	93.6	93.2	0.89	54.8	6	96.8	1.9	2.8	0.164	242	75
37	M2QA 200MLB 2	3GQA201420...F	2958	93.7	94.2	94	0.9	66.8	5.6	119	2	2.8	0.197	268	75
45	M2QA 225SMA 2	3GQA221210...F	2978	94	94.1	93.4	0.9	81	6.8	144	2.2	3.5	0.318	311	75
55	M2QA 250SMA 2	3GQA251210...F	2968	94.3	94.6	94.2	0.89	100	6.9	176	2.2	3	0.413	370	77
75	M2QA 280SA 2	3GQA281110...F	2976	94.7	95.1	94.7	0.9	133	7.5	240	1.9	3.2	0.649	534	75
90	M2QA 280SMA 2	3GQA281210...F	2978	95	95.3	95	0.9	159	8.5	288	2.3	3.5	0.749	588	76
110	M2QA 315SMA 2	3GQA311210...F	2979	95.2	95.1	94.2	0.87	201	6.6	352	1.6	2.7	1.15	824	74
132	M2QA 315SMB 2	3GQA311220...F	2979	95.4	95.4	94.7	0.88	238	6.9	423	1.8	2.7	1.3	875	74
160	M2QA 315MLA 2	3GQA311410...F	2981	95.6	95.6	94.9	0.88	288	7.1	512	2.2	2.6	1.46	983	75
185	M2QA 315MLB 2	3GQA311420...F	2983	95.7	95.7	94.9	0.89	330	8.5	592	2.2	3.1	1.72	1069	74
200	M2QA 315MLC 2	3GQA311430...F	2981	95.8	95.9	95.2	0.89	356	7.2	640	2.3	2.9	1.72	1078	75
220	M2QA 355SMA 2	3GQA351210...F	2984	95.8	95.6	94.6	0.89	392	7.4	704	1.6	3.2	2.47	1345	83
250	M2QA 355SMB 2	3GQA351220...F	2983	95.8	95.7	94.9	0.89	445	8	800	1.8	3	2.71	1390	83
280	M2QA 355SMC 2	3GQA351230...F	2983	95.8	95.7	94.9	0.91	487	8.7	896	2	3.2	3.15	1458	83
315	M2QA 355SMD 2	3GQA351240...F	2979	95.8	95.8	95.2	0.91	548	7.7	1009	1.8	2.9	3.15	1482	83
355	M2QA 355SME 2	3GQA351250...F	2981	95.8	95.9	95.3	0.91	618	7.7	1137	1.8	2.7	3.31	1573	83
<b>3000 r/min = 2 极 / 2 poles</b>			<b>380V</b>	<b>50Hz</b>											
<b>高输出设计 High output design</b>															
5.5	M2QA 112MLB 2	3GQA111420...F	2928	89.2	89.9	89.6	0.89	10.5	8.7	17.9	2.7	4.1	0.00845	52	69
11	M2QA 132SMC 2	3GQA131230...F	2919	91.2	92.1	92.7	0.91	20.1	8.1	35.9	2.8	3.9	0.0171	85	69
22	M2QA 160MLB 2	3GQA161420...F	2950	92.7	93.2	93.2	0.91	39.7	7.1	71.2	2	3.1	0.0782	167	75
30	M2QA 180MLA 2	3GQA181410...F	2959	93.3	93.5	93.1	0.89	54.8	7.8	96.8	2.3	3.4	0.109	213	75
45	M2QA 200MLC 2	3GQA201430...F	2954	94	94.5	94.3	0.89	81.7	5.5	145	2	2.5	0.196	271	77
55	M2QA 225SMB 2	3GQA221220...F	2974	94.3	94.5	94	0.91	97.3	5.9	176	2	3	0.347	329	80
75	M2QA 250SMB 2	3GQA251220...F	2968	94.7	94.9	94.5	0.89	134	7.2	241	2.5	3.2	0.508	428	79
110	M2QA 280SMB 2	3GQA281220...F	2975	95.2	95.5	95.3	0.92	190	8.6	353	2.2	3.3	0.823	629	76
132	M2QA 280SMC 2	3GQA281230...F	2974	95.4	95.8	95.7	0.91	230	8	423	2.6	3.3	0.947	738	77
250	M2QA 315MLD 2	3GQA311440...F	2979	95.8	95.9	95.4	0.9	440	6.9	801	2.2	3	2.25	1313	81
315*	M2QA 315MLE 2	3GQA311450...F	2979	95.8	95.9	95.5	0.9	555	7.9	1009	2.8	2.9	2.78	1495	78
400*	M2QA 355MLA 2	3GQA351410...F	2979	95.8	95.9	95.2	0.89	712	6.4	1282	2	2.6	3.9	1801	83
450*	M2QA 355MLB 2	3GQA351420...F	2982	95.8	95.8	95.3	0.91	784	7.2	1441	2	3.2	3.95	1853	83
500	M2QA 355LKA 2	3GQA351810...F	2980	95.8	95.9	95.4	0.91	871	6.8	1602	1.8	3.5	4.51	2528	83
560	M2QA 355LKB 2	3GQA351820...F	2981	95.8	95.9	95.4	0.9	986	7.3	1793	2	3.7	4.93	2232	83

产品代码中的两个圆点表示可选的安装方式、电压及频率代码 (见订购信息一页)。

The two bullet s in the product code indicate choice of mounting arrangements, voltage and frequency code (see ordering information page).

\* 温升等级 F

\* temperature rise class F

$I_s / I_N$  = 启动电流  
 $T_l / T_N$  = 转子堵转转矩  
 $T_b / T_N$  = 最大转矩

$I_s / I_N$  = Starting current  
 $T_l / T_N$  = Locked rotor torque  
 $T_b / T_N$  = Breakdown torque

# 技术数据

## Technical data

# IE3

## 4P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的3级能效, 符合IEC 60034-30-1:2025 的IE3 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 3 according to GB 18613-2020, IE3 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cosφ	电流 Current		转矩 / Torque			转动惯量 Moment of Weight inertia	重量 Weight	声压等级 Sound pressure level
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		$I_N$	$I_s/I_N$	$T_N$	$T_l/T_N$	$T_b/T_N$			
kW			r/min				A					J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	kg	LPA dB	
<b>1500 r/min = 4 极 / 4 poles</b>			<b>380V</b>	<b>50Hz</b>	<b>CENELEC- 设计 design</b>										
0.25	M2QA 71MA 4	3GQA072310...F	1433	73.5	69.3	64	0.69	0.74	5.8	1.66	2.5	3.1	0.0007	10	41
0.37	M2QA 71MLA 4	3GQA072410...F	1433	77.3	76.1	71.1	0.71	1.02	6.4	2.4	2.5	3.4	0.0009	12	50
0.55	M2QA 80MA 4	3GQA082310...F	1448	80.8	80.8	77.5	0.79	1.31	5.8	3.6	2	2.9	0.00174	17	48
0.75	M2QA 80MB 4	3GQA082320...F	1459	82.5	82	78.5	0.76	1.82	6.4	4.9	2.5	3.4	0.00206	18	48
1.1	M2QA 90SA 4	3GQA092110...F	1432	84.1	84.5	82.9	0.79	2.5	6.6	7.3	3	3.5	0.00373	24	44
1.5	M2QA 90SLA 4	3GQA092010...F	1431	85.3	85.7	84.3	0.8	3.3	6.8	10	3.1	3.6	0.00477	28	44
2.2	M2QA 100LKA 4	3GQA102810...F	1464	86.7	87.2	86.1	0.81	4.7	6.9	14.3	1.8	2.8	0.00849	38	48
3	M2QA 100LKB 4	3GQA102820...F	1468	87.7	88.4	87.7	0.82	6.3	6.9	19.5	1.9	2.8	0.0104	41	48
4	M2QA 112MLA 4	3GQA112410...F	1461	88.6	89.1	87.9	0.82	8.3	6	26.1	1.9	3.2	0.014	46	57
5.5	M2QA 132SMA 4	3GQA132210...F	1463	89.6	90.2	90	0.83	11.2	7.5	35.8	2.4	3.2	0.0333	68	59
7.5	M2QA 132SMB 4	3GQA132220...F	1466	90.4	90.8	90.6	0.84	15	8	48.8	2.5	3.2	0.0441	78	59
11	M2QA 160MA 4	3GQA162310...F	1476	91.4	91.6	91.4	0.87	21	6	71.1	1.7	2.5	0.0765	130	67
15	M2QA 160MLA 4	3GQA162410...F	1477	92.1	92.3	92.1	0.87	28.4	6.6	96.9	1.9	2.8	0.0996	156	67
18.5	M2QA 180MA 4	3GQA182310...F	1478	92.6	93.1	93	0.86	35.2	6.7	119	2.2	2.7	0.144	175	67
22	M2QA 180MLA 4	3GQA182410...F	1478	93	93.4	93.4	0.86	41.7	7.3	142	2.5	2.9	0.168	198	67
30	M2QA 200MLA 4	3GQA202410...F	1484	93.6	94	93.8	0.86	56.6	6.2	193	1.8	3.2	0.323	262	67
37	M2QA 225SMA 4	3GQA222210...F	1489	93.9	93.8	93.1	0.85	70.4	7.9	237	2.4	3.2	0.514	303	67
45	M2QA 225SMB 4	3GQA222220...F	1488	94.2	94.2	93.5	0.85	85.5	7.9	288	2.4	3.1	0.563	322	68
55	M2QA 250SMA 4	3GQA252210...F	1481	94.6	95.1	95	0.87	101	6.6	354	2.1	3	0.582	361	72
75	M2QA 280SA 4	3GQA282110...F	1488	95	95.3	94.8	0.88	136	7.1	481	2.4	2.9	1.26	567	66
90	M2QA 280SMA 4	3GQA282210...F	1487	95.2	95.5	95	0.89	161	7.3	577	2.8	3	1.51	633	66
110	M2QA 315SMA 4	3GQA312210...F	1486	95.4	95.6	95.2	0.86	203	6.4	706	1.9	3	1.9	823	71
132	M2QA 315SMB 4	3GQA312220...F	1487	95.6	95.9	95.6	0.87	241	6.8	847	2.1	3.1	2.29	903	71
160	M2QA 315MLA 4	3GQA312410...F	1487	95.8	96.1	95.8	0.87	291	7	1027	2.3	3.1	2.55	1010	71
185	M2QA 315MLB 4	3GQA312420...F	1488	95.9	96.1	95.7	0.87	336	6.2	1187	2.1	2.6	2.72	1054	74
200	M2QA 315MLC 4	3GQA312430...F	1488	96	96.2	95.8	0.87	363	6.1	1283	2.1	2.7	3.02	1115	74
220	M2QA 355SMA 4	3GQA352210...F	1489	96	96.2	95.8	0.88	395	6.8	1410	2.2	3	4.51	1350	78
250	M2QA 355SMB 4	3GQA352220...F	1490	96	96.1	95.7	0.87	454	6.3	1602	1.9	2.8	5.09	1442	78
280	M2QA 355SMC 4	3GQA352230...F	1488	96	96.3	96	0.88	503	6.3	1796	1.8	2.4	5.09	1442	78
315	M2QA 355SMD 4	3GQA352240...F	1490	96	96.1	95.6	0.88	566	6.9	2018	2.2	3	6.25	1622	78
355	M2QA 355SME 4	3GQA352250...F	1489	96	96.2	95.9	0.87	645	5.7	2276	2.1	2.5	6.54	1683	81
<b>1500 r/min = 4 极 / 4 poles</b>			<b>380V</b>	<b>50Hz</b>	<b>高输出设计 High output design</b>										
5.5	M2QA 112MLB 4	3GQA112420...F	1462	89.6	90.4	90	0.84	11.1	4.2	35.9	1.7	2.9	0.0202	58	63
11	M2QA 132SMC 4	3GQA132230...F	1463	91.4	91.9	92.1	0.85	21.5	7.2	71.7	1.8	2.5	0.0633	105	63
18.5	M2QA 160MLB 4	3GQA162420...F	1475	92.6	92.9	93	0.89	34.1	7.3	119	2	3.2	0.13	188	66
30	M2QA 180MLB 4	3GQA182420...F	1478	93.6	94.1	94.4	0.87	55.9	7.2	193	2.5	2.9	0.244	251	65
37	M2QA 200MLB 4	3GQA202420...F	1483	93.9	94.2	93.8	0.84	71.2	6.3	238	1.9	2.8	0.353	277	69
55*	M2QA 225SMC 4	3GQA222230...F	1485	94.6	95	95.1	0.85	103	6.8	353	2.1	2.8	0.603	338	73
75*	M2QA 250SMB 4	3GQA252220...F	1484	95	95.3	95.1	0.85	141	8	482	2.9	3.7	0.719	424	74
110	M2QA 280SMB 4	3GQA282220...F	1485	95.4	95.7	95.4	0.86	204	7.8	707	2.6	2.8	1.47	708	70
132	M2QA 280SMC 4	3GQA282230...F	1483	95.6	95.9	95.7	0.87	242	7.5	849	2.6	2.6	1.64	754	70
250	M2QA 315MLD 4	3GQA312440...F	1485	96	96.3	96.1	0.85	465	7	1607	2.2	2.9	3.54	1304	78
315	M2QA 315MLE 4	3GQA312450...F	1488	96	96.2	96	0.86	579	7.6	2021	2.7	2.9	4.25	1475	78
400*	M2QA 355MLA 4	3GQA352410...F	1488	96	96.3	95.9	0.86	736	6.1	2567	2	2.3	7.91	1946	78
450*	M2QA 355MLB 4	3GQA352420...F	1488	96	96.3	96	0.87	818	6.2	2887	2	2.6	7.56	1935	78
500	M2QA 355LKA 4	3GQA352810...F	1490	96	96.2	95.8	0.87	909	6.2	3204	1.8	2.7	9.35	2276	78
560*	M2QA 355LKB 4	3GQA352820...F	1488	96	96.3	96	0.86	1030	6.6	3593	2.3	2.4	9.94	2380	78

产品代码中的两个圆点表示可选的安装方式、电压及频率代码 (见订购信息一页)。

\* 温升等级 F

$I_s / I_N$  = 启动电流  
 $T_l / T_N$  = 转子堵转转矩  
 $T_b / T_N$  = 最大转矩

The two bullet s in the product code indicate choice of mounting arrangements, voltage and frequency code (see ordering information page).

\* temperature rise class F

$I_s / I_N$  = Starting current  
 $T_l / T_N$  = Locked rotor torque  
 $T_b / T_N$  = Breakdown torque

# 技术数据

## Technical data

# IE3

## 6P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的3级能效, 符合IEC 60034-30-1:2025 的IE3 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 3 according to GB 18613-2020, IE3 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor cosφ	电流 Current		转矩 / Torque			转动惯量 Moment of Weight inertia	重量 Weight	声压等级 Sound pressure level
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		I <sub>N</sub>	I <sub>s</sub> /I <sub>N</sub>	T <sub>N</sub>	T <sub>l</sub> /T <sub>N</sub>	T <sub>b</sub> /T <sub>N</sub>			
kW			r/min	100%	75%	50%	A	I <sub>s</sub> /I <sub>N</sub>	N <sub>m</sub>	T <sub>l</sub> /T <sub>N</sub>	T <sub>b</sub> /T <sub>N</sub>	J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	kg	LPA dB	
<b>1000 r/min = 6 极 / 6 poles</b>			<b>380V</b>	<b>50Hz</b>			<b>CENELEC- 设计 design</b>								
0.18	M2QA 71MA 6	3GQA073310...F	925	63.9	63.7	57.7	0.72	0.59	3.4	1.84	1.8	2.2	0.00089	10	40
0.25	M2QA 71MLA 6	3GQA073410...F	923	68.6	69.1	64.6	0.72	0.76	3.5	2.6	1.9	2.3	0.00123	12	42
0.37	M2QA 80MA 6	3GQA083310...F	943	73.5	69.9	65.6	0.73	1.04	4.3	3.7	1.9	2.3	0.00159	16	53
0.55	M2QA 80MB 6	3GQA083320...F	955	77.2	77.4	73.8	0.74	1.46	4.6	5.5	2.2	2.5	0.00234	19	53
0.75	M2QA 90SA 6	3GQA093110...F	962	78.9	78.5	75.1	0.72	2	5.2	7.4	1.8	2.6	0.00401	23	56
1.1	M2QA 90SLA 6	3GQA093010...F	956	81	81.2	78.2	0.72	2.8	5	10.9	1.7	2.5	0.00446	25	57
1.5	M2QA 100LKA 6	3GQA103810...F	965	82.5	82.7	80.6	0.74	3.7	6.1	14.8	2	2.9	0.0119	38	54
2.2	M2QA 112MLA 6	3GQA113410...F	971	84.3	84.5	82.4	0.77	5.1	6	21.6	2	2.9	0.0137	44	48
3	M2QA 132SMA 6	3GQA133210...F	971	85.6	86.3	85.2	0.76	7	6.5	29.5	2.7	3.3	0.0317	59	54
4	M2QA 132SMB 6	3GQA133220...F	971	86.8	87.2	86.4	0.76	9.2	6.3	39.3	2.5	3.1	0.0422	67	54
5.5	M2QA 132SMC 6	3GQA133230...F	970	88	88.7	88.2	0.76	12.4	6.5	54.1	2.6	3.2	0.0562	78	54
7.5	M2QA 160MA 6	3GQA163310...F	986	89.1	89.8	89.2	0.79	16.2	6.7	72.6	1.9	2.9	0.106	127	58
11	M2QA 160MLA 6	3GQA163410...F	983	90.3	91.9	91.9	0.79	23.4	6.5	107	1.9	2.5	0.138	153	58
15	M2QA 180MLA 6	3GQA183410...F	984	91.2	91.3	90.5	0.84	29.7	6.5	146	2.1	2.9	0.212	189	59
18.5	M2QA 200MLA 6	3GQA203410...F	989	91.7	91.4	90.7	0.86	35.8	6.1	179	1.9	2.8	0.349	254	66
22	M2QA 200MLB 6	3GQA203420...F	988	92.2	92	91.3	0.85	42.6	6.5	212	2	2.9	0.403	275	67
30	M2QA 225SMA 6	3GQA223210...F	989	92.9	93	92.7	0.83	58.8	7.4	290	2.1	3	0.618	333	62
37	M2QA 250SMA 6	3GQA253210...F	990	93.3	93.1	92.7	0.83	72.5	6.3	357	2.4	3.2	1.07	370	63
45	M2QA 280SA 6	3GQA283110...F	991	93.7	94.1	93.7	0.85	85.5	7.1	434	1.9	2.7	1.48	501	64
55	M2QA 280SMA 6	3GQA283210...F	991	94.1	94.5	94.2	0.85	103	7.3	530	2	2.8	1.8	559	64
75	M2QA 315SMA 6	3GQA313210...F	994	94.6	94.9	94.4	0.83	145	6.3	720	1.7	2.7	3.16	777	75
90	M2QA 315SMB 6	3GQA313220...F	994	94.9	95.2	94.8	0.84	171	6.8	864	2	3.1	3.81	853	76
110	M2QA 315MLA 6	3GQA313410...F	994	95.1	95.5	95.1	0.84	209	6.7	1057	2.1	3.2	4.48	979	75
132	M2QA 315MLB 6	3GQA313420...F	994	95.4	95.7	95.3	0.84	250	6.8	1268	2.2	3.2	5.36	1080	72
160	M2QA 355SMA 6	3GQA353210...F	993	95.6	95.9	95.5	0.84	302	6.4	1539	2.2	2.5	6.85	1340	75
185	M2QA 355SMB 6	3GQA353220...F	990	95.7	96.6	96.8	0.85	345	5.7	1785	1.7	2	7.41	1386	71
200	M2QA 355SMC 6	3GQA353230...F	992	95.8	96.1	95.8	0.84	377	6	1924	2	2.4	8.41	1494	75
220	M2QA 355SMD 6	3GQA353240...F	992	95.8	96.1	95.9	0.84	413	6.9	2118	2.4	2.7	8.88	1539	75
250	M2QA 355SME 6	3GQA353250...F	992	95.8	96.2	96	0.85	469	6	2407	2.3	3.2	10.1	1658	75
280	M2QA 355SMF 6	3GQA353260...F	991	95.8	96.2	96.2	0.84	528	7.2	2698	2.5	2.4	10.5	1695	75
315	M2QA 355MLA 6	3GQA353410...F	991	95.8	96	95.7	0.86	580	6.3	3035	2.2	2.4	12.9	1982	78
<b>1000 r/min = 6 极 / 6 poles</b>			<b>380V</b>	<b>50Hz</b>			<b>高输出设计 High output design</b>								
3	M2QA 112MLB 6	3GQA113420...F	966	85.6	86	84.6	0.77	6.9	4.7	29.6	1.5	2.3	0.016	48	52
7.5	M2QA 132SMD 6	3GQA133240...F	969	89.1	89.7	89.4	0.79	16.1	7.4	73.9	2.9	3.5	0.0772	101	60
15	M2QA 160MLB 6	3GQA163420...F	984	91.2	91.6	91.4	0.8	31.4	6.5	145	2.1	2.8	0.194	190	60
18.5	M2QA 180MLB 6	3GQA183420...F	982	91.7	91.9	91.5	0.85	36	6.5	179	2	3	0.312	231	61
30	M2QA 200MLC 6	3GQA203430...F	984	92.9	93.2	93.3	0.86	57.3	6.3	291	1.9	2.7	0.459	298	65
37	M2QA 225SMB 6	3GQA223220...F	989	93.3	93.5	93.3	0.83	72.2	6.8	357	2.1	3	0.692	357	60
45	M2QA 250SMB 6	3GQA253220...F	990	93.7	93.6	93.4	0.83	87.9	6.5	434	2.5	3.2	1.24	422	66
75	M2QA 280SMB 6	3GQA283220...F	990	94.6	95	94.9	0.89	135	6.7	723	2	2.9	2.35	700	61
90	M2QA 280SMC 6	3GQA283230...F	991	94.9	95.3	95.3	0.89	161	6.9	867	2.1	2.9	2.87	782	61
160	M2QA 315MLC 6	3GQA313430...F	994	95.6	95.8	95.4	0.82	310	7.2	1537	2.1	2.4	6.25	1273	76
200	M2QA 315MLD 6	3GQA313440...F	993	95.8	96.1	95.8	0.82	386	6.4	1923	1.9	2.5	7.71	1444	76
355	M2QA 355LKA 6	3GQA353810...F	992	95.8	95.9	95.3	0.84	670	7	3417	2.5	3.1	14.7	2283	75
400	M2QA 355LKB 6	3GQA353820...F	991	95.8	96.1	95.7	0.84	755	6.5	3854	2.3	2.3	15.6	2379	75

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

The two bullet s in the product code indicate choice of mounting arrangements , voltag e and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
T<sub>l</sub> / T<sub>N</sub> = 转子堵转转矩  
T<sub>b</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
T<sub>l</sub> / T<sub>N</sub> = Locked rotor torque  
T<sub>b</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE3

## 8P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合GB 18613-2020 的3级能效, 符合IEC 60034-30-1:2025 的IE3 效率等级

IP55 - IC411 Insulation class F, temperature class B

Grade 3 according to GB 18613-2020, IE3 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1:2025			功率 因数 Power factor	电流 Current		转矩 / Torque			转动惯量 Moment of inertia	重量 Weight	声压等级 Sound pressure level
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		$I_N$	$I_s/I_N$	$T_N$	$T_l/T_N$	$T_b/T_N$			
kW		r/min		50Hz			cosφ	A				$J=1/4$ GD <sup>2</sup> kgm <sup>2</sup>	kg	LPA dB	
<b>750 r/min = 8 极 / 8 poles</b>															
<b>380V 50Hz CENELEC- 设计 design</b>															
0.12	M2QA 71MLA 8	3GQA074410---F	683	50.7	45.4	37.1	0.65	0.55	2.6	1.67	1.9	2.3	0.00094	11	42
0.18	M2QA 80MA 8	3GQA084310---F	702	58.7	54.3	46.6	0.66	0.7	3.1	2.4	2	2.5	0.00172	16	45
0.25	M2QA 80MB 8	3GQA084320---F	707	64.1	59.8	51.9	0.62	0.96	3.3	3.3	2.3	2.8	0.00236	18	45
0.37	M2QA 90SA 8	3GQA094110---F	720	69.3	66.3	59.4	0.63	1.28	3.6	4.9	1.7	2.4	0.00424	24	55
0.55	M2QA 90SLA 8	3GQA094010---F	715	73	70.9	64.8	0.64	1.78	3.5	7.3	1.6	2.3	0.00469	27	55
0.75	M2QA 100LKA 8	3GQA104810---F	700	75	74.7	70.7	0.66	2.2	3.6	10.2	1.7	2.6	0.0108	35	52
1.1	M2QA 100LKB 8	3GQA104820---F	704	77.7	78.2	75.4	0.67	3.2	3.8	14.9	1.9	2.7	0.0151	40	52
1.5	M2QA 112MLA 8	3GQA114410---F	714	79.7	80.5	78.3	0.67	4.2	4.4	20	1.6	2.3	0.0191	46	52
2.2	M2QA 132SMA 8	3GQA134210---F	724	81.9	83	81.6	0.74	5.5	4.4	29	1.5	2.2	0.041	65	57
3	M2QA 132SMB 8	3GQA134220---F	727	83.5	83.3	81.6	0.74	7.4	4.6	39.4	1.7	2.3	0.0534	75	57
4	M2QA 160MA 8	3GQA164310---F	736	84.8	88.1	87	0.71	10	4.8	51.8	1.5	2.1	0.0849	117	62
5.5	M2QA 160MB 8	3GQA164320---F	734	86.2	89.3	88.5	0.71	13.6	5	71.5	1.5	2.2	0.108	130	62
7.5	M2QA 160MLA 8	3GQA164410---F	734	87.3	90.3	89.8	0.71	18.3	5.2	97.5	1.6	2.3	0.141	156	63
11	M2QA 180MLA 8	3GQA184410---F	732	88.6	90	89.8	0.76	24.7	5.1	143	2.1	2.6	0.229	197	60
15	M2QA 200MLA 8	3GQA204410---F	737	89.6	91.7	91.5	0.76	33.4	5.2	194	1.7	2.4	0.374	246	61
18.5	M2QA 225SMA 8	3GQA224210---F	742	90.1	90.1	89.3	0.77	40.4	6.2	238	2.1	2.9	0.568	281	63
22	M2QA 225SMB 8	3GQA224220---F	741	90.6	92	91.5	0.8	46	5.6	283	1.8	2.5	0.682	309	63
30	M2QA 250SMA 8	3GQA254210---F	739	91.3	92.1	92	0.79	63.1	5	387	1.8	1.9	1.16	401	60
37	M2QA 280SA 8	3GQA284110---F	742	91.8	91.5	90.9	0.81	75.6	5.8	476	1.7	2.3	1.65	518	61
45	M2QA 280SMA 8	3GQA284210---F	742	92.2	92.1	91.7	0.81	91.5	5.6	579	1.8	2.3	1.79	553	61
55	M2QA 315SMA 8	3GQA314210---F	742	92.5	92.6	92.1	0.82	110	6.5	707	1.4	2.4	3.23	774	62
75	M2QA 315SMB 8	3GQA314220---F	741	93.1	93.2	92.8	0.83	147	6.6	966	1.5	2.4	4.09	862	62
90	M2QA 315MLA 8	3GQA314410---F	741	93.4	93.5	93.1	0.84	174	6.8	1159	1.6	2.4	4.81	993	64
110	M2QA 315MLB 8	3GQA314420---F	740	93.7	94	93.8	0.84	212	6.7	1419	1.6	2.4	5.6	1077	72
132	M2QA 355SMA 8	3GQA354210---F	744	94	94.5	93.9	0.8	266	6.7	1694	1.4	2.4	7.47	1374	74
160	M2QA 355SMB 8	3GQA354220---F	743	94.3	94.5	94.1	0.8	322	7.1	2056	1.6	2.5	9.13	1541	74
185	M2QA 355SMC 8	3GQA354230---F	743	94.5	94.7	94.1	0.8	371	7.1	2377	1.5	2.4	10.6	1686	69
200	M2QA 355SMD 8	3GQA354240---F	742	94.6	95	94.6	0.81	396	6.7	2573	1.4	2.2	10.6	1686	69
220	M2QA 355MLA 8	3GQA354410---F	743	94.6	94.6	93.9	0.81	436	7.8	2827	1.7	2.7	12.6	1964	72
250	M2QA 355MLB 8	3GQA354420---F	742	94.6	95.1	94.8	0.82	489	7.2	3217	1.5	2.4	12.6	1964	72
<b>750 r/min = 8 极 / 8 poles</b>															
<b>380V 50Hz 高输出设计 High output design</b>															
2.2	M2QA 112MLB 8	3GQA114420---F	707	81.9	84.7	83.8	0.69	5.9	4.5	29.7	1.6	2.3	0.0285	58	52
4	M2QA 132SMC 8	3GQA134230---F	718	84.8	87.1	87	0.76	9.4	4.5	53.1	1.6	2	0.0658	90	57
11	M2QA 160MLB 8	3GQA164420---F	735	88.6	89.6	88.8	0.71	26.4	5	142	1.6	2.2	0.197	190	63
15	M2QA 180MLB 8	3GQA184420---F	733	89.6	90.5	90.2	0.77	33	5.2	195	1.8	2.4	0.313	232	62
18.5	M2QA 200MLB 8	3GQA204420---F	737	90.1	92	91.7	0.76	41	5	239	1.7	2.2	0.429	277	60
30*	M2QA 225SMC 8	3GQA224230---F	741	91.3	91.4	90.8	0.79	63.5	6.3	386	2.2	2.9	0.86	351	68
37	M2QA 250SMB 8	3GQA254220---F	741	91.8	91.6	91.1	0.76	80.5	6	476	2.2	2.3	1.39	447	67
55	M2QA 280SMB 8	3GQA284220---F	742	92.5	92.2	91.6	0.82	110	6.3	707	2.1	2.6	2.56	718	69
75*	M2QA 280SMC 8	3GQA284230---F	741	93.1	93.2	92.9	0.82	148	5.7	966	1.9	2.3	3.01	792	69
132	M2QA 315MLC 8	3GQA314430---F	744	94	94.4	94.3	0.8	266	6.7	1694	1.4	2.4	6.24	1274	74
160*	M2QA 315MLD 8	3GQA314440---F	744	94.3	94.7	94.7	0.8	322	7.1	2053	1.6	2.5	7.78	1450	74
280*	M2QA 355LKA 8	3GQA354810---F	742	94.6	94.8	94.5	0.8	562	6.7	3603	1.4	2.5	13.6	2182	75
315*	M2QA 355LKB 8	3GQA354820---F	742	94.6	94.8	94.5	0.82	616	7.2	4053	1.5	2.4	15.4	2357	75

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

\* 温升等级 F

$I_s / I_N$  = 启动电流  
 $T_l / T_N$  = 转子堵转转矩  
 $T_b / T_N$  = 最大转矩

The two bullet s in the product code indicate choice of mounting arrangements, voltage and frequency code (see ordering information page).

\* temperature rise class F

$I_s / I_N$  = Starting current  
 $T_l / T_N$  = Locked rotor torque  
 $T_b / T_N$  = Breakdown torque

# 技术数据

## Technical data

# IE2

## 2P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B  
 符合IEC 60034-30-1:2025 的IE2 效率等级  
 IP55 - IC411 Insulation class F, temperature class B  
 IE2 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1;2025			功率 因数	电流 Current			转矩 / Torque			转动惯量 Moment of inertia	重量 Weight	声压等级 Sound pressure level
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		Power factor cosφ	I <sub>n</sub> A	I <sub>s</sub> /I <sub>n</sub>	T <sub>N</sub> N <sub>m</sub>	T <sub>I</sub> /T <sub>N</sub>	T <sub>B</sub> /T <sub>N</sub>			
kW			r/min	380V	50Hz									kg	LPA dB	
3000 r/min = 2 极 /2 poles																
CENELEC- 设计 design																
0.37	M2QA 71MA 2	3GQA071310...C	2769	69.5	69.2	64.8	0.83	0.97	4.9	1.27	2.5	3	0.0003	10	56	
0.55	M2QA 71MB 2	3GQA071320...C	2790	74.1	74.1	70.5	0.83	1.35	4.9	1.88	2.5	3	0.00038	11	58	
0.75	M2QA 80MA 2	3GQA081310...C	2815	77.4	78.2	75.8	0.85	1.73	5.7	2.5	2.6	3.7	0.00064	16	63	
1.1	M2QA 80MB 2	3GQA081320...C	2819	79.6	80.9	79.3	0.86	2.4	5.6	3.7	2.8	3.4	0.00083	17	62	
1.5	M2QA 90SA 2	3GQA091110...C	2856	81.3	82.5	81.7	0.87	3.2	5.7	5	2.2	3	0.00185	23	60	
2.2	M2QA 90SLA 2	3GQA091010...C	2870	83.2	84.3	83.5	0.86	4.6	6.7	7.3	2.8	3.5	0.00227	27	61	
3	M2QA 100LKA 2	3GQA101810...C	2898	84.6	86.3	86.6	0.89	6	6.8	9.8	1.8	2.9	0.00383	36	63	
4	M2QA 112MLA 2	3GQA111410...C	2914	85.8	86.7	86.3	0.88	8	7.7	13.1	2	3.4	0.00614	42	63	
5.5	M2QA 132SMA 2	3GQA131210...C	2912	87	88.9	89.1	0.88	10.9	6	18	2	2.9	0.00905	57	66	
7.5	M2QA 132SMB 2	3GQA131220...C	2915	88.1	89.9	89.9	0.88	14.6	7.5	24.5	2.5	3.6	0.0114	64	67	
11	M2QA 160MA 2	3GQA161310...C	2945	89.4	89.9	89.1	0.89	21	6	35.6	1.5	2.8	0.0449	122	70	
15	M2QA 160MB 2	3GQA161320...C	2942	90.3	90.8	90.3	0.9	28	6.5	48.6	1.7	2.9	0.0567	136	70	
18.5	M2QA 160MLA 2	3GQA161410...C	2947	90.9	91.3	90.8	0.9	34.3	7	59.9	2	3.1	0.0634	153	72	
22	M2QA 180MA 2	3GQA181310...C	2952	91.3	91.7	91.5	0.89	41	6.2	71.1	1.8	2.9	0.082	163	68	
30	M2QA 200MLA 2	3GQA201410...C	2957	92	92.2	91.5	0.89	55.6	6	96.8	1.9	2.8	0.155	236	75	
37	M2QA 200MLB 2	3GQA201420...C	2955	92.5	93	92.8	0.89	68.2	6.6	119	2	2.8	0.18	253	75	
45	M2QA 225SMA 2	3GQA221210...C	2978	92.9	92.9	91.7	0.9	81.7	7	144	2.2	3.5	0.312	308	75	
55	M2QA 250SMA 2	3GQA251210...C	2968	93.2	93.4	92.8	0.89	100	6.9	176	2.2	3	0.415	371	77	
75	M2QA 280SA 2	3GQA281110...C	2976	93.8	94.2	93.8	0.9	134	7.5	240	1.9	3.2	0.649	534	75	
90	M2QA 280SMA 2	3GQA281210...C	2973	94.1	94.4	94	0.91	159	7.3	289	1.9	3.2	0.736	584	76	
110	M2QA 315SMA 2	3GQA311210...C	2980	94.3	94.2	93.2	0.88	201	6.6	352	1.5	2.7	1.11	801	74	
132	M2QA 315SMB 2	3GQA311220...C	2980	94.6	94.7	94.1	0.88	240	6.9	422	1.5	2.7	1.27	857	74	
160	M2QA 315MLA 2	3GQA311410...C	2981	94.8	94.8	94	0.88	291	7.1	512	2.2	2.6	1.46	983	78	
185	M2QA 315MLB 2	3GQA311420...C	2984	95	95	94.1	0.89	332	8.5	592	2.2	3.1	1.72	1070	74	
200	M2QA 315MLC 2	3GQA311430...C	2981	95	95.1	94.3	0.89	359	7.2	640	2.3	2.9	1.72	1079	81	
220	M2QA 355SMA 2	3GQA351210...C	2984	95	94.7	93.6	0.89	395	7.4	704	1.6	3.2	2.47	1345	83	
250	M2QA 355SMB 2	3GQA351220...C	2980	95	95	94.1	0.9	444	6.2	801	1.6	2.5	2.47	1371	83	
280	M2QA 355SMC 2	3GQA351230...C	2983	95	94.9	93.9	0.91	492	8.6	896	1.9	3.3	3.02	1449	83	
315	M2QA 355SMD 2	3GQA351240...C	2978	95	95	94.1	0.89	566	6.9	1010	1.8	2.5	3.02	1479	83	
355	M2QA 355SME 2	3GQA351250...C	2981	95	95	94.2	0.89	637	6.8	1137	1.9	2.4	3.22	1559	83	

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

I<sub>s</sub> / I<sub>N</sub> = 启动电流  
 T<sub>I</sub> / T<sub>N</sub> = 转子堵转转矩  
 T<sub>B</sub> / T<sub>N</sub> = 最大转矩

I<sub>s</sub> / I<sub>N</sub> = Starting current  
 T<sub>I</sub> / T<sub>N</sub> = Locked rotor torque  
 T<sub>B</sub> / T<sub>N</sub> = Breakdown torque

# 技术数据

## Technical data

# IE2

## 4P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B

符合IEC 60034-30-1:2025 的IE2 效率等级

IP55 - IC411 Insulation class F, temperature class B

IE2 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1;2025			功率 因数 Power factor	电流 Current			转矩 / Torque			转动惯量 Moment of inertia	重量 Weight	声压等级 Sound pressure level
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		$I_N$	$I_s/I_N$	$T_N$	$T_i/T_N$	$T_b/T_N$	$J=1/4$ GD <sup>2</sup> kgm <sup>2</sup>			
kW			r/min	380V	50Hz		cosφ	A	$I_s/I_N$	$N_m$	$T_i/T_N$	$T_b/T_N$	GD <sup>2</sup> kgm <sup>2</sup>	kg	LPA dB	
1500 r/min = 4 极 / 4 poles			CENELEC- 设计 design													
0.25	M2QA 71MA 4	3GQA072310-...C	1412	68.5	63.7	57.7	0.74	0.74	4.6	1.69	1.9	2.7	0.00054	10	49	
0.37	M2QA 71MB 4	3GQA072320-...C	1408	72.7	67.3	62.2	0.73	1.05	4.9	2.5	2.3	2.8	0.0007	11	46	
0.55	M2QA 80MA 4	3GQA082310-...C	1447	77.1	76.7	72.5	0.77	1.41	5.7	3.6	2	2.9	0.00164	16	48	
0.75	M2QA 80MB 4	3GQA082320-...C	1442	79.6	79.4	75.8	0.77	1.85	5.6	4.9	2	2.9	0.00185	17	48	
1.1	M2QA 90SA 4	3GQA092110-...C	1440	81.4	80.9	77.3	0.76	2.7	6.3	7.2	3.5	3.8	0.00353	22	55	
1.5	M2QA 90SLA 4	3GQA092010-...C	1424	82.8	82.7	80	0.77	3.5	6.6	10	3.3	3.8	0.00438	26	51	
2.2	M2QA 100LKA 4	3GQA102810-...C	1462	84.3	84.3	82.3	0.78	5	6.6	14.3	1.7	2.7	0.00738	34	48	
3	M2QA 100LKB 4	3GQA102820-...C	1461	85.5	85.9	84.7	0.79	6.7	6.7	19.6	1.8	2.8	0.00924	38	48	
4	M2QA 112MLA 4	3GQA112410-...C	1458	86.6	87.1	85.5	0.83	8.4	6.7	26.1	1.8	3.1	0.014	45	57	
5.5	M2QA 132SMA 4	3GQA132210-...C	1461	87.7	88.8	88.6	0.84	11.3	7	35.9	2.1	2.8	0.0292	64	59	
7.5	M2QA 132SMB 4	3GQA132220-...C	1463	88.7	89.5	89.4	0.85	15.1	7.5	48.9	2.1	2.8	0.0387	73	59	
11	M2QA 160MA 4	3GQA162310-...C	1474	89.8	90.1	89.8	0.85	21.8	6	71.2	2	2.5	0.0673	124	67	
15	M2QA 160MLA 4	3GQA162410-...C	1477	90.6	90.6	90.2	0.85	29.5	7	96.9	2.5	2.9	0.0881	153	67	
18.5	M2QA 180MA 4	3GQA182310-...C	1477	91.2	91.8	91.8	0.86	35.8	5.2	119	2.2	2.4	0.144	174	69	
22	M2QA 180MLA 4	3GQA182410-...C	1477	91.6	92.2	92.2	0.86	42.4	5.4	142	2.3	2.5	0.168	197	69	
30	M2QA 200MLA 4	3GQA202410-...C	1482	92.3	92.8	92.7	0.87	56.7	5.5	193	1.7	3	0.323	262	67	
37	M2QA 225SMA 4	3GQA222210-...C	1487	92.7	92.5	91.7	0.86	70.5	7.5	237	2.3	2.9	0.479	292	67	
45	M2QA 225SMB 4	3GQA222220-...C	1487	93.1	93	92.2	0.86	85.3	7.5	288	2.4	3	0.517	305	68	
55	M2QA 250SMA 4	3GQA252210-...C	1482	93.5	93.8	93.4	0.88	101	7.4	354	2	3.1	0.559	354	72	
75	M2QA 280SA 4	3GQA282110-...C	1488	94	94.3	93.7	0.88	137	7.1	481	2.4	2.9	1.26	567	66	
90	M2QA 280SMA 4	3GQA282210-...C	1487	94.2	94.5	94	0.89	163	7.3	577	2.8	3	1.51	633	66	
110	M2QA 315SMA 4	3GQA312210-...C	1487	94.5	94.6	93.9	0.87	203	6.3	706	1.8	2.9	1.83	797	78	
132	M2QA 315SMB 4	3GQA312220-...C	1487	94.7	94.9	94.3	0.87	243	6.8	847	2	3	2.16	863	78	
160	M2QA 315MLA 4	3GQA312410-...C	1487	94.9	95.2	94.6	0.87	294	6.9	1027	2.2	3.1	2.42	1072	78	
185	M2QA 315MLB 4	3GQA312420-...C	1485	95.1	95.5	95.1	0.86	343	6.2	1189	2.3	2.5	2.64	1029	78	
200	M2QA 315MLC 4	3GQA312430-...C	1485	95.1	95.4	95.1	0.87	367	6.4	1286	2.1	2.5	2.88	1211	78	
220	M2QA 355SMA 4	3GQA352210-...C	1488	95.1	95.2	94.4	0.87	404	6.2	1411	1.7	2.8	4.64	1359	82	
250	M2QA 355SMB 4	3GQA352220-...C	1488	95.1	95.3	94.6	0.87	459	6.2	1604	1.8	2.8	5	1413	82	
280	M2QA 355SMC 4	3GQA352230-...C	1488	95.1	95.3	94.8	0.88	508	6.3	1796	1.8	2.4	5.09	1445	81	
315	M2QA 355SMD 4	3GQA352240-...C	1487	95.1	95.3	94.7	0.87	578	6.7	2022	2	2.9	6.14	1586	82	
355	M2QA 355SME 4	3GQA352250-...C	1485	95.1	95.4	94.9	0.87	651	6.1	2282	2.1	2.4	6.74	1701	82	

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

$I_s / I_N$  = 启动电流  
 $T_i / T_N$  = 转子堵转转矩  
 $T_b / T_N$  = 最大转矩

$I_s / I_N$  = Starting current  
 $T_i / T_N$  = Locked rotor torque  
 $T_b / T_N$  = Breakdown torque

# 技术数据

## Technical data

# IE2

## 6P 380V 50Hz

IP55 - IC411 绝缘等级F, 温升等级B  
 符合IEC 60034-30-1:2025 的IE2 效率等级  
 IP55 - IC411 Insulation class F, temperature class B  
 IE2 according to IEC 60034-30-1:2025

输出 Output	电机型号 Motor type	产品代码 Product code	转速 Speed	效率 / Efficiency IEC 60034-30-1;2025			功率 因数 Power factor	电流 Current			转矩 / Torque			转动惯量 Moment of inertia	重量 Weight	声压等级 Sound pressure level
				满载 load 100%	3/4 负载 load 75%	1/2 负载 load 50%		$I_n$	$I_s/I_n$	$T_n$	$T_l/T_n$	$T_b/T_n$				
kW			r/min	100%	75%	50%	cosφ	A	$I_s/I_n$	$N_m$	$T_l/T_n$	$T_b/T_n$	J=1/4 GD <sup>2</sup> kgm <sup>2</sup>	kg	LPA dB	
1000 r/min = 6 极 / 6 poles			380V	50Hz			CENELEC- 设计 design									
0.18	M2QA 71MA 6	3GQA073310-...C	936	56.6	56.3	50.2	0.72	0.67	3.4	1.83	1.8	2.2	0.00089	10	40	
0.25	M2QA 71MLA 6	3GQA073410-...C	929	61.6	62.2	57.2	0.72	0.85	3.5	2.5	1.9	2.3	0.00123	12	42	
0.37	M2QA 80MA 6	3GQA083310-...C	943	67.6	63.6	58.9	0.73	1.13	4.3	3.7	1.9	2.3	0.00159	16	53	
0.55	M2QA 80MB 6	3GQA083320-...C	933	73.1	73.9	69.9	0.75	1.51	4.1	5.6	1.8	2.2	0.00191	17	53	
0.75	M2QA 90SA 6	3GQA093110-...C	961	75.9	75.6	71.9	0.73	2	5.2	7.4	1.8	2.6	0.00401	23	56	
1.1	M2QA 90SLA 6	3GQA093010-...C	955	78.1	78.2	74.6	0.72	2.9	5	10.9	1.8	2.5	0.00446	25	57	
1.5	M2QA 100LKA 6	3GQA103810-...C	964	79.8	79.1	75.8	0.72	3.9	6	14.8	2	3.1	0.00971	34	54	
2.2	M2QA 112MLA 6	3GQA113410-...C	971	81.8	82	79.6	0.77	5.3	6	21.6	2	2.9	0.0137	44	48	
3	M2QA 132SMA 6	3GQA133210-...C	963	83.3	84.3	83.6	0.77	7.1	5.5	29.7	2	2.5	0.0299	58	54	
4	M2QA 132SMB 6	3GQA133220-...C	966	84.6	85.7	85.2	0.77	9.3	6	39.5	2.2	2.8	0.0387	65	54	
5.5	M2QA 132SMC 6	3GQA133230-...C	970	86	86.5	85.7	0.77	12.6	6.5	54.1	2.5	3	0.0527	76	54	
7.5	M2QA 160MA 6	3GQA163310-...C	984	87.2	89.3	88.9	0.79	16.5	7.3	72.7	2	2.6	0.0929	122	58	
11	M2QA 160MLA 6	3GQA163410-...C	982	88.7	90	89.7	0.79	23.8	7	106	1.9	2.5	0.126	147	58	
15	M2QA 180MLA 6	3GQA183410-...C	983	89.7	90	89.4	0.83	30.6	6.5	145	1.8	3.2	0.201	184	59	
18.5	M2QA 200MLA 6	3GQA203410-...C	988	90.4	90.1	89.3	0.84	37	5.8	178	1.8	2.7	0.297	237	66	
22	M2QA 200MLB 6	3GQA203420-...C	987	90.9	90.7	90.1	0.85	43.2	6	212	1.9	2.7	0.343	252	67	
30	M2QA 225SMA 6	3GQA223210-...C	990	91.7	91.2	90.1	0.82	60.6	7.5	289	2.2	2.9	0.571	315	62	
37	M2QA 250SMA 6	3GQA253210-...C	990	92.2	91.9	91.2	0.85	71.7	6.3	356	2.4	3.3	1.01	356	63	
45	M2QA 280SA 6	3GQA283110-...C	991	92.7	93.1	92.7	0.85	86.4	7.1	433	1.9	2.7	1.48	501	64	
55	M2QA 280SMA 6	3GQA283210-...C	991	93.1	93.6	93.3	0.85	105	7.3	529	2	2.8	1.8	559	64	
75	M2QA 315SMA 6	3GQA313210-...C	992	93.7	93.9	93.4	0.84	144	6.4	721	1.8	2.4	2.79	729	75	
90	M2QA 315SMB 6	3GQA313220-...C	991	94	94.2	93.8	0.84	173	7.2	867	2	2.5	3.35	792	75	
110	M2QA 315MLA 6	3GQA313410-...C	991	94.3	94.7	94.4	0.84	210	7.2	1059	2.3	2.5	4.28	947	75	
132	M2QA 315MLB 6	3GQA313420-...C	990	94.6	95.1	95	0.85	249	6.8	1273	2.2	2.4	5.09	1035	75	
160	M2QA 355SMA 6	3GQA353210-...C	991	94.8	95.2	94.8	0.85	301	6.3	1541	1.9	2.1	6.38	1281	77	
185	M2QA 355SMB 6	3GQA353220-...C	988	94.9	95.9	95.8	0.84	352	4.9	1788	1.7	1.9	6.95	1333	77	
200	M2QA 355SMC 6	3GQA353230-...C	990	95	95.5	95.2	0.85	376	6.2	1929	2	2.1	7.8	1423	77	
220	M2QA 355SMD 6	3GQA353240-...C	988	95	96	96	0.84	418	5.1	2126	1.9	1.9	8.46	1567	77	
250	M2QA 355SME 6	3GQA353250-...C	990	95	95.6	95.5	0.85	470	5.1	2411	2.3	2.5	9.77	1609	77	
280	M2QA 355SMF 6	3GQA353260-...C	986	95	96.1	96.2	0.84	533	5.1	2711	2	1.9	9.96	1630	77	
315	M2QA 355MLA 6	3GQA353410-...C	991	95	95.3	94.9	0.86	585	6.3	3035	2.2	2.4	12.7	1976	78	

产品代码中的两个圆点表示可选的安装方式、电压及频率代码（见订购信息一页）。

The two bullet s in the product code indicate choice of mounting arrangements , voltage and frequency code (see ordering information page).

$I_s / I_n$  = 启动电流  
 $T_l / T_n$  = 转子堵转转矩  
 $T_b / T_n$  = 最大转矩

$I_s / I_n$  = Starting current  
 $T_l / T_n$  = Locked rotor torque  
 $T_b / T_n$  = Breakdown torque

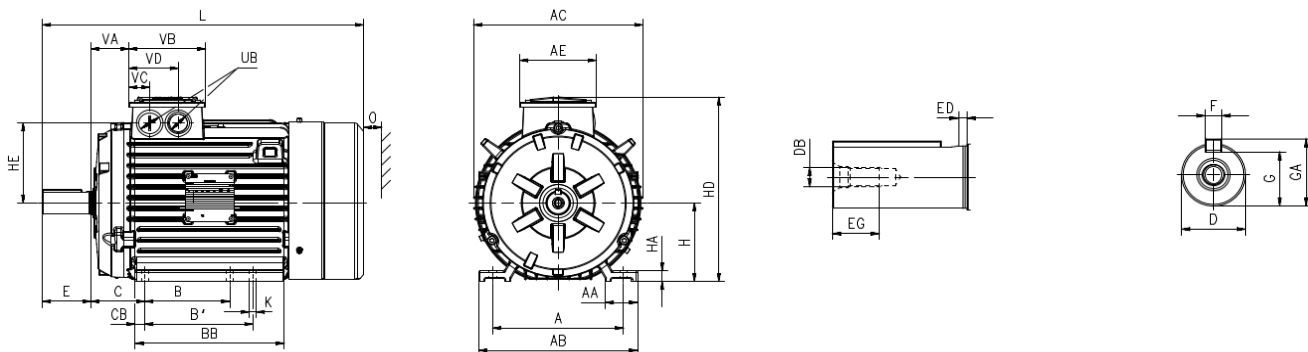




# 外形图及外形尺寸 Dimension drawings

# 机座号 71-132 Frame size 71-132

底脚安装型电机 IM1001, B3  
Foot-mounted motor IM1001, B3



电机尺寸 Motor size	A	AA	AB	AC	AE	B	B'	BB	C	CB	D-tol.	DB	E	EG	ED
71M	112	30	136	147	101	90	-	110	45	10	14-j6	M5	30	13	5
71ML <sup>(1)</sup>	112	30	136	147	101	90	-	135	45	10	14-j6	M5	30	13	5
71ML <sup>(2)</sup>	112	30	136	147	101	90	100	150	45	10	14-j6	M5	30	13	5
80M	125	33	154	164	111	100	-	125	50	12.5	19-j6	M6	40	16	4
80ML <sup>(3)</sup>	125	33	154	184	111	100	112	150	50	12.5	19-j6	M6	40	16	4
80ML <sup>(4)</sup>	125	33	154	184	111	100	112	165	50	12.5	19-j6	M6	40	16	4
80ML <sup>(5)</sup>	125	33	154	184	111	100	112	180	50	12.5	19-j6	M6	40	16	4
90S	140	33	170	195	111	100	-	124	56	12	24-j6	M8	50	19	5
90SL <sup>(6)</sup>	140	33	170	195	111	100	125	150	56	12	24-j6	M8	50	19	5
90SL <sup>(7)</sup>	140	33	170	195	111	100	125	185	56	12	24-j6	M8	50	19	5
90SL <sup>(8)</sup>	140	33	170	195	111	100	125	185	56	12	24-j6	M8	50	19	5
100LK <sup>(9)</sup>	160	38	200	232	127	140	160	190	63	15	28-j6	M10	60	22	5
100LK <sup>(10)</sup>	160	38	200	232	127	140	160	205	63	15	28-j6	M10	60	22	5
100LK <sup>(11)</sup>	160	38	200	232	127	140	160	225	63	15	28-j6	M10	60	22	5
112ML <sup>(12)</sup>	190	48	230	236	127	140	159	189	70	15	28-j6	M10	60	22	5
112ML <sup>(13)</sup>	190	48	230	236	127	140	159	215	70	15	28-j6	M10	60	22	5
112ML <sup>(14)</sup>	190	48	230	236	127	140	159	219	70	15	28-j6	M10	60	22	5
132S	216	53	262	279	127	140	-	196	89	16	38-k6	M12	80	28	5
132SM <sup>(15)</sup>	216	53	262	279	127	140	178	210	89	16	38-k6	M12	80	28	5
132SM <sup>(16)</sup>	216	53	262	279	127	140	178	246	89	16	38-k6	M12	80	28	5
132SM <sup>(17)</sup>	216	53	262	279	127	140	178	246	89	16	38-k6	M12	80	28	5

## 附注 Footnotes

- <sup>1)</sup> IE5 71MLA2-6; IE4 71MLA2-6; IE3 71MLA4-8; IE2 71MLA6
- <sup>2)</sup> IE5 71MLB4-6
- <sup>3)</sup> IE4 80MLA2-6; IE5 80MLA2
- <sup>4)</sup> IE4 80MLB4-6/MLA8; IE5 80MLA4-8
- <sup>5)</sup> IE5 80MLB4-8
- <sup>6)</sup> IE5 90SLA8; IE4 90SLA8; IE3 90SLA2-8; IE2 90SLA2-6
- <sup>7)</sup> IE5 90SLA2-6/SLB2/SLB8; IE4 90SLA2-6/SLB4
- <sup>8)</sup> IE5 90SLB4-6
- <sup>9)</sup> IE5 100LKA6; IE4 100LKA4-8; IE3 100LKA2-8/LKB4/LKB8; IE2 100LKA2-6/LKB4; 100LKB10
- <sup>10)</sup> IE5 100LKA2/LKA4/LKA8; IE4 100LKA2/LKB4/LKB8
- <sup>11)</sup> IE5 100LKB4/LKB8
- <sup>12)</sup> IE4 112MLA6; IE3 112MLA2-8/MLB6; IE2 112MLA2-6; 112MLB10/MLA12
- <sup>13)</sup> IE5 112MLA2/MLA6; IE4 112MLA2/MLA4/MLA8; IE3 112MLB2/MLB4/MLB8
- <sup>14)</sup> IE5 112MLA4/MLA8
- <sup>15)</sup> IE3 132SMA2-8/SMB2-8/SMC6; IE2 132SMA2-6/SMB2-6/SMC6; 132SMB10
- <sup>16)</sup> IE5 132SMA2-8; IE4 132SMA2-8/SMB6; IE3 132SMC2/SMC8; 132SMC12
- <sup>17)</sup> IE5 132SMB4-8; IE3 132SMC4/SMD6

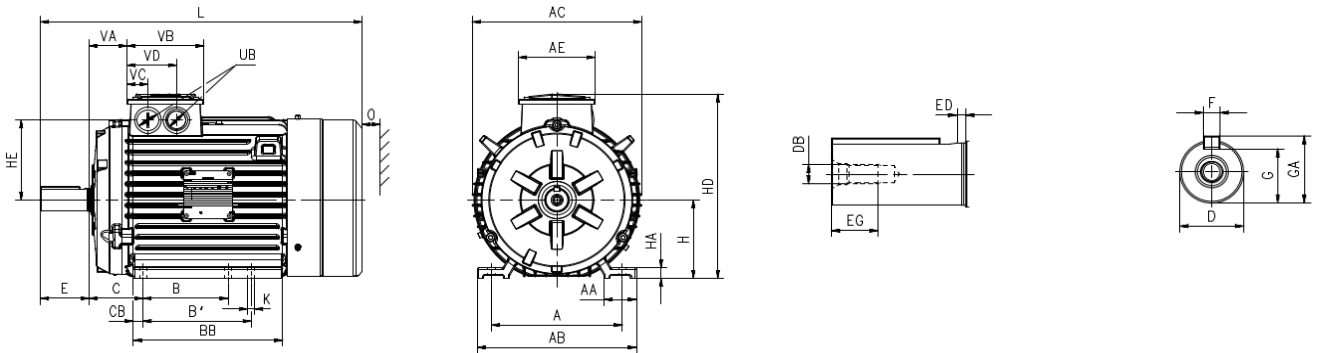
上表给出了主要尺寸 (单位: mm)  
如需图纸详情, 请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB。

Above table gives the main dimensions in mm.  
For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.

# 外形图及外形尺寸 Dimension drawings

# 机座号 71-132 Frame size 71-132

底脚安装型电机 IM1001, B3  
Foot-mounted motor IM1001, B3



电机尺寸 Motor size	F(h9)	G	GA	H	HA	HD	HE	K	L	UB	VA	VB	VC	VD	O
71M	5	11	16	71	9	178	65	7	262	M16x1.5	38	101	33	65	20
71ML <sup>(1)</sup>	5	11	16	71	9	178	65	7	287	M16x1.5	38	101	33	65	20
71ML <sup>(2)</sup>	5	11	16	71	9	178	65	7	312	M16x1.5	38	101	33	65	20
80M	6	15.5	21.5	80	12	193	69.5	10	312	M25x1.5	40	111	30	70	20
80ML <sup>(3)</sup>	6	15.5	21.5	80	12	193	69.5	10	337	M25x1.5	40	111	30	70	20
80ML <sup>(4)</sup>	6	15.5	21.5	80	12	193	69.5	10	367	M25x1.5	40	111	30	70	20
80ML <sup>(5)</sup>	6	15.5	21.5	80	12	193	69.5	10	397	M25x1.5	40	111	30	70	20
90S	8	20	27	90	12	219	86	10	339	M25x1.5	48	111	30	70	20
90SL <sup>(6)</sup>	8	20	27	90	12	219	86	10	355	M25x1.5	48	111	30	70	20
90SL <sup>(7)</sup>	8	20	27	90	12	219	86	10	390	M25x1.5	48	111	30	70	20
90SL <sup>(8)</sup>	8	20	27	90	12	219	86	10	430	M25x1.5	48	111	30	70	20
100LK <sup>(9)</sup>	8	24	31	100	15	247	103	12	419	M32x1.5	53	127	34	81	25
100LK <sup>(10)</sup>	8	24	31	100	15	247	103	12	464	M32x1.5	53	127	34	81	25
100LK <sup>(11)</sup>	8	24	31	100	15	247	103	12	509	M32x1.5	53	127	34	81	25
112ML <sup>(12)</sup>	8	24	31	112	15	268	112	12	440	M32x1.5	64	127	34	81	25
112ML <sup>(13)</sup>	8	24	31	112	15	268	112	12	480	M32x1.5	64	127	34	81	25
112ML <sup>(14)</sup>	8	24	31	112	15	268	112	12	520	M32x1.5	64	127	34	81	25
132S	10	33	41	132	18	310	134	12	480	M32x1.5	63	127	34	81	30
132SM <sup>(15)</sup>	10	33	41	132	18	310	134	12	480	M32x1.5	63	127	34	81	30
132SM <sup>(16)</sup>	10	33	41	132	18	310	134	12	530	M32x1.5	63	127	34	81	30
132SM <sup>(17)</sup>	10	33	41	132	18	310	134	12	580	M32x1.5	63	127	34	81	30

**附注 Footnotes**

- <sup>1)</sup> IE5 71MLA2-6; IE4 71MLA2-6; IE3 71MLA4-8; IE2 71MLA6
- <sup>2)</sup> IE5 71MLB4-6
- <sup>3)</sup> IE4 80MLA2-6; IE5 80MLA2
- <sup>4)</sup> IE4 80MLB4-6/MLA8; IE5 80MLA4-8
- <sup>5)</sup> IE5 80MLB4-8
- <sup>6)</sup> IE5 90SLA8; IE4 90SLA8; IE3 90SLA2-8; IE2 90SLA2-6
- <sup>7)</sup> IE5 90SLA2-6/SLB2/SLB8; IE4 90SLA2-6/SLB4
- <sup>8)</sup> IE5 90SLB4-6
- <sup>9)</sup> IE5 100LKA6; IE4 100LKA4-8; IE3 100LKA2-8/LKB4/LKB8; IE2 100LKA2-6/LKB4; 100LKB10
- <sup>10)</sup> IE5 100LKA2/LKA4/LKA8; IE4 100LKA2/LKB4/LKB8
- <sup>11)</sup> IE5 100LKB4/LKB8
- <sup>12)</sup> IE4 112MLA6; IE3 112MLA2-8/MLB6; IE2 112MLA2-6; 112MLB10/MLA12
- <sup>13)</sup> IE5 112MLA2/MLA6; IE4 112MLA2/MLA4/MLA8; IE3 112MLB2/MLB4/MLB8
- <sup>14)</sup> IE5 112MLA4/MLA8
- <sup>15)</sup> IE3 132SMA2-8/SMB2-8/SMC6; IE2 132SMA2-6/SMB2-6/SMC6; 132SMB10
- <sup>16)</sup> IE5 132SMA2-8; IE4 132SMA2-8/SMB6; IE3 132SMC2/SMC8; 132SMC12
- <sup>17)</sup> IE5 132SMB4-8; IE3 132SMC4/SMD6

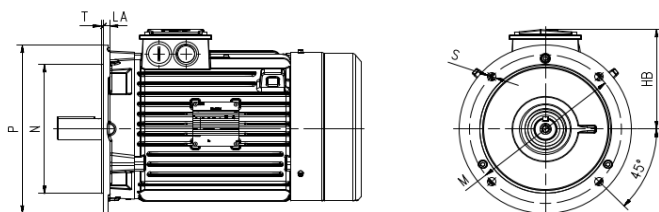
上表给出了主要尺寸 (单位: mm)  
如需图纸详情, 请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB.

Above table gives the main dimensions in mm.  
For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.

# 外形图及外形尺寸 Dimension drawings


# 机座号 71-132 Frame size 71-132

凸缘安装型电机 IM3001, B5  
Flange-mounted motor IM3001, B5



电机尺寸 Motor size	HB	LA	M	N	P	S	T
71	108	9	130	110	160	10	3.5
80	113	10	165	130	200	12	3.5
90	129	10	165	130	200	12	3.5
100	147	11	215	180	250	14.5	4
112	156	11	215	180	250	14.5	4
132	178	12	265	230	300	14.5	4

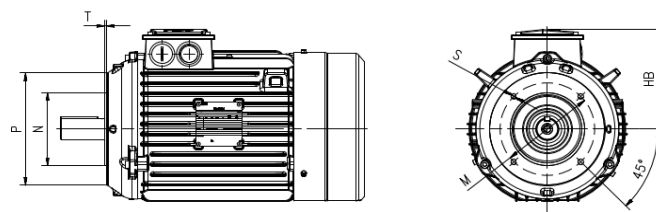小凸缘安装型电机 IM3601, B14  
Small flange-mounted motor IM3601, B14



电机尺寸 Motor size	HB	M	N	P	S	T
71	108	85	70	105	M6	2.5
80	113	100	80	120	M6	3
90	129	115	95	140	M8	3
100	147	130	110	160	M8	3.5
112	156	130	110	160	M8	3.5
132	178	165	130	200	M10	3.5


上表给出了主要尺寸 (单位: mm)  
如需图纸详情, 请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB。

Above table gives the main dimensions in mm.  
For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.

# 外形图及外形尺寸 Dimension drawings
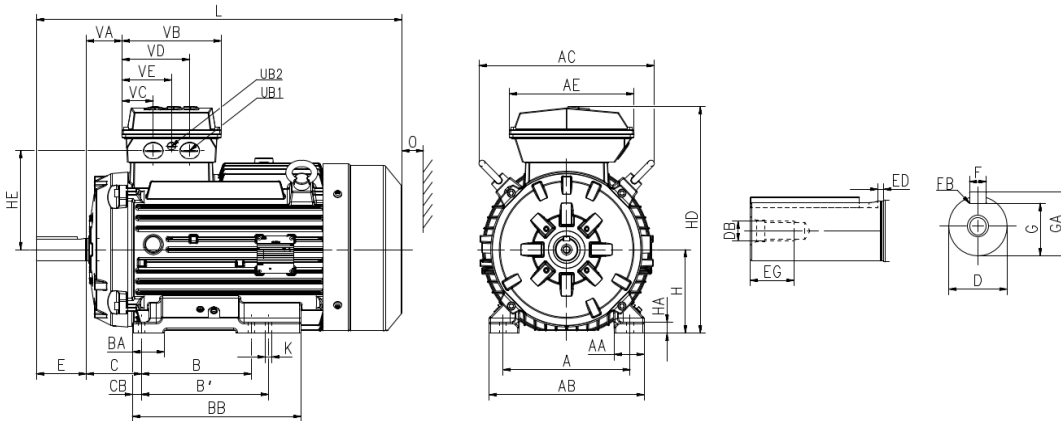
# 机座号 160-250 Frame size 160-250

底脚安装型电机 IM1001, B3  
Foot-mounted motor IM1001, B3



电机尺寸 Motor size	极数 Poles	A	AA	AB	AC	AE	B	B'	BA	BB	C	CB	D-tol.	DB	E	EG	ED
160M	2-12p	254	67	310	348	274	210	/	71	250	108	20	42-k6	M16	110	36	10
160ML <sup>(1)</sup>	2-12p	254	67	310	348	274	210	254	71	295	108	20	42-k6	M16	110	36	10
160ML <sup>(2)</sup>	2-12p	254	67	310	348	274	210	254	71	295	108	20	42-k6	M16	110	36	10
160ML <sup>(3)</sup>	2-12p	254	67	310	348	274	210	254	71	350	108	20	42-k6	M16	110	36	10
180M	2-12p	279	65	340	385	274	241	/	70	294	121	20	48-k6	M16	110	36	5
180ML <sup>(4)</sup>	2-12p	279	65	340	385	274	241	279	70	319	121	20	48-k6	M16	110	36	5
180ML <sup>(5)</sup>	2-12p	279	65	340	385	274	241	279	70	370	121	20	48-k6	M16	110	36	5
200ML <sup>(6)</sup>	2-12p	318	69	378	442	312	267	305	82	344	133	20	55-m6	M20	110	42	5
200ML <sup>(7)</sup>	2-12p	318	69	378	442	312	267	305	82	408	133	20	55-m6	M20	110	42	5
225SM <sup>(8)</sup>	2P	356	90	434	486	312	286	311	68	356	149	20	55-m6	M20	110	42	5
225SM <sup>(9)</sup>	4-12P	356	90	434	486	312	286	311	68	356	149	20	60-m6	M20	140	42	7.5
225SM <sup>(10)</sup>	2P	356	90	434	486	312	286	311	68	407	149	20	55-m6	M20	110	42	5
225SM <sup>(11)</sup>	4-12P	356	90	434	486	312	286	311	68	407	149	20	60-m6	M20	140	42	7.5
250SM <sup>(12)</sup>	2P	406	97	480	506	312	311	349	79	397	168	24	60-m6	M20	140	42	7.5
250SM <sup>(13)</sup>	4-12P	406	97	480	506	312	311	349	79	397	168	24	65-m6	M20	140	42	7.5
250SM <sup>(14)</sup>	2P	406	96	480	506	312	311	349	79	397	168	24	60-m6	M20	140	42	7.5
250SM <sup>(15)</sup>	4-12P	406	96	480	506	312	311	349	79	397	168	24	65-m6	M20	140	42	7.5
250SM <sup>(16)</sup>	2P	406	96	480	506	312	311	349	79	420	168	24	60-m6	M20	140	42	7.5
250SM <sup>(17)</sup>	4-12P	406	96	480	506	312	311	349	79	420	168	24	65-m6	M20	140	42	7.5

**附注 Footnotes**

- <sup>1)</sup> IE5 160MLA8; IE4 160MLA2-8/MLB2/MLB8/MC2; IE3 160MLA2-8/MLB2; IE2 160MLA2-6; 160MLB10-12
- <sup>2)</sup> IE5 160MLA2-6/MLB2/MLB8; IE4 160MLB4-6; IE3 160MLB4-8
- <sup>3)</sup> IE5 160MLB4/MLB6/MC2
- <sup>4)</sup> IE4 180MLA2-8/MLB4; IE3 180MLA2-8/MLB6-8; IE2 180MLA4-6
- <sup>5)</sup> IE5 180MLA2-8/MLB4; IE3 180MLB4
- <sup>6)</sup> IE5 200MLA8; IE4 200MLA2-8/MLB2/MLB6; IE3 200MLA2-8/MLB2-8/MC2/MC6; IE2 200MLA2-6/MLB2/MLB6; 200MLA10-12
- <sup>7)</sup> IE5 200MLA2-6/MLB2/MLB6
- <sup>8)</sup> IE4 225SMA2; IE3 225SMA2/SMB2; IE2 225SMA2
- <sup>9)</sup> IE5 225SMA8/SMB8; IE4 225SMA4-8/SMB4/SMB8; IE3 225SMA4-8/SMB4-8/SMC4/SMC8; IE2 225SMA4-6/SMB4; 225SMB10-12
- <sup>10)</sup> IE5 225SMA2
- <sup>11)</sup> IE5 225SMA4-6/SMB4
- <sup>12)</sup> IE3 250SMA2; IE2 250SMA2
- <sup>13)</sup> IE3 250SMA4-6; IE2 250SMA4-6
- <sup>14)</sup> IE4 250SMA2; IE3 250SMB2
- <sup>15)</sup> IE4 250SMA4-8; IE3 250SMA8/SMB4-8; 250SMA10
- <sup>16)</sup> IE5 250SMA2
- <sup>17)</sup> IE5 250SMA4-8; 250SMA12

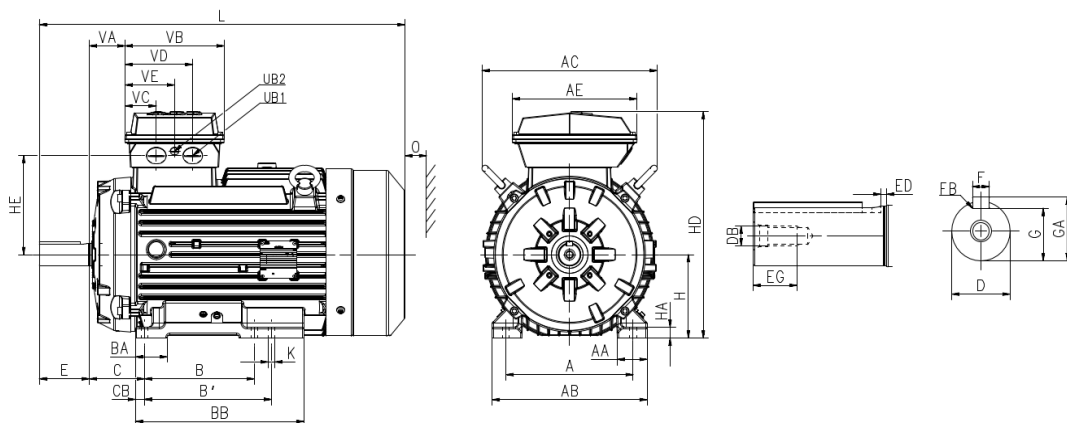
上表给出了主要尺寸 (单位: mm)  
 如需图纸详情, 请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB.

Above table gives the main dimensions in mm.  
 For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.

# 外形图及外形尺寸 Dimension drawings

# 机座号 160-250 Frame size 160-250

底脚安装型电机 IM1001, B3  
Foot-mounted motor IM1001, B3



电机尺寸 Motor size	极数 Poles	F(h9)	G	GA	H	HA	HD	HE	K	L	UB1	UB2	VA	VB	VC	VD	VE	O
160M	2-12p	12	37	45	160	23	450	194	14.5	595	M40x1.5	M16X1.5	71	218	69	149	109	45
160ML <sup>(1)</sup>	2-12p	12	37	45	160	23	450	194	14.5	655	M40x1.5	M16X1.5	71	218	69	149	109	45
160ML <sup>(2)</sup>	2-12p	12	37	45	160	23	450	194	14.5	715	M40x1.5	M16X1.5	71	218	69	149	109	45
160ML <sup>(3)</sup>	2-12p	12	37	45	160	23	450	194	14.5	788	M40x1.5	M16X1.5	71	218	69	149	109	45
180M	2-12p	14	42.5	51.5	180	23	488	212	14.5	663	M40x1.5	M16x1.5	78	218	69	149	109	50
180ML <sup>(4)</sup>	2-12p	14	42.5	51.5	180	23	488	212	14.5	728	M40x1.5	M16x1.5	78	218	69	149	109	50
180ML <sup>(5)</sup>	2-12p	14	42.5	51.5	180	23	488	212	14.5	803	M40x1.5	M16x1.5	78	218	69	149	109	50
200ML <sup>(6)</sup>	2-12p	16	49	59	200	23	557	231	18.5	793	M63x1.5	M16x1.5	90	240	65	175	120	70
200ML <sup>(7)</sup>	2-12p	16	49	59	200	23	557	231	18.5	883	M63x1.5	M16x1.5	90	240	65	175	120	70
225SM <sup>(8)</sup>	2P	16	49	59	225	23.5	600	249	18.5	826	M63x1.5	M16x1.5	87	240	65	175	120	80
225SM <sup>(9)</sup>	4-12P	18	53	64	225	23.5	600	249	18.5	856	M63x1.5	M16x1.5	87	240	65	175	120	80
225SM <sup>(10)</sup>	2P	16	49	59	225	23.5	600	249	18.5	976	M63x1.5	M16x1.5	87	240	65	175	120	80
225SM <sup>(11)</sup>	4-12P	18	53	64	225	23.5	600	249	18.5	1006	M63x1.5	M16x1.5	87	240	65	175	120	80
250SM <sup>(12)</sup>	2P	18	53	64	250	24	646	270	24	809	M63x1.5	M16x1.5	89	240	65	175	120	90
250SM <sup>(13)</sup>	4-12P	18	58	69	250	24	646	270	24	809	M63x1.5	M16x1.5	89	240	65	175	120	90
250SM <sup>(14)</sup>	2P	18	53	64	250	24	646	270	24	884	M63x1.5	M16x1.5	89	240	65	175	120	90
250SM <sup>(15)</sup>	4-12P	18	58	69	250	24	646	270	24	884	M63x1.5	M16x1.5	89	240	65	175	120	90
250SM <sup>(16)</sup>	2P	18	53	64	250	24	646	270	24	1029	M63x1.5	M16x1.5	89	240	65	175	120	90
250SM <sup>(17)</sup>	4-12P	18	58	69	250	24	646	270	24	1029	M63x1.5	M16x1.5	89	240	65	175	120	90

## 附注 Footnotes

- <sup>1)</sup> IE5 160MLA8; IE4 160MLA2-8/MLB2/MLB8/MC2; IE3 160MLA2-8/MLB2; IE2 160MLA2-6; 160MLB10-12
- <sup>2)</sup> IE5 160MLA2-6/MLB2/MLB8; IE4 160MLB4-6; IE3 160MLB4-8
- <sup>3)</sup> IE5 160MLB4/MLB6/MC2
- <sup>4)</sup> IE4 180MLA2-8/MLB4; IE3 180MLA2-8/MLB6-8; IE2 180MLA4-6
- <sup>5)</sup> IE5 180MLA2-8/MLB4; IE3 180MLB4
- <sup>6)</sup> IE5 200MLA8; IE4 200MLA2-8/MLB2/MLB6; IE3 200MLA2-8/MLB2-8/MC2/MC6; IE2 200MLA2-6/MLB2/MLB6; 200MLA10-12
- <sup>7)</sup> IE5 200MLA2-6/MLB2/MLB6
- <sup>8)</sup> IE4 225SMA2; IE3 225SMA2/SMB2; IE2 225SMA2
- <sup>9)</sup> IE5 225SMA8/SMB8; IE4 225SMA4-8/SMB4/SMB8; IE3 225SMA4-8/SMB4-8/SMC4/SMC8; IE2 225SMA4-6/SMB4; 225SMB10-12
- <sup>10)</sup> IE5 225SMA2
- <sup>11)</sup> IE5 225SMA4-6/SMB4
- <sup>12)</sup> IE3 250SMA2; IE2 250SMA2
- <sup>13)</sup> IE3 250SMA4-6; IE2 250SMA4-6
- <sup>14)</sup> IE4 250SMA2; IE3 250SMB2
- <sup>15)</sup> IE4 250SMA4-8; IE3 250SMA8/SMB4-8; 250SMA10
- <sup>16)</sup> IE5 250SMA2
- <sup>17)</sup> IE5 250SMA4-8; 250SMA12

上表给出了主要尺寸 (单位: mm)  
如需图纸详情, 请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB。

Above table gives the main dimensions in mm.  
For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.




# 外形图及外形尺寸 Dimension drawings

# 机座号 160-250 Frame size 160-250

凸缘安装型电机 IM3001, B5  
Flange-mounted motor IM3001, B5

机座号 160-200  
Frame size 160-200

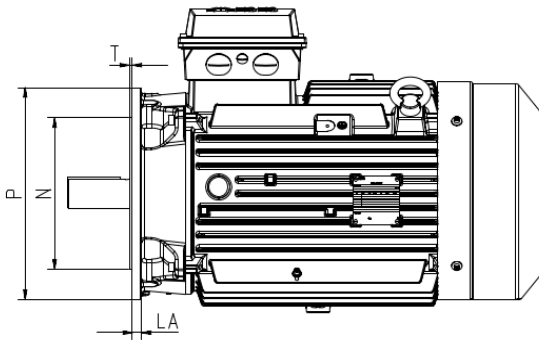机座号 225-250  
Frame size 225-250



电机尺寸 Motor size	极数 Poles	HB	LA	M	N	P	S	T
160	2-8p	290	15	300	250-j6	350	18.5	5
180	2-8p	308	16	300	250-j6	350	18.5	5
200	2-8p	357	20	350	300-h6	400	18.5	5
225	2P	375	20	400	350-h6	450	18.5	5
225	4-8P	375	20	400	350-h6	450	18.5	5
250	2P	396	20	500	450-h6	550	18.5	5
250	4-8P	396	20	500	450-h6	550	18.5	5

上表给出了主要尺寸 (单位: mm)  
如需图纸详情, 请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB。

Above table gives the main dimensions in mm.  
For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.


# 外形图及外形尺寸
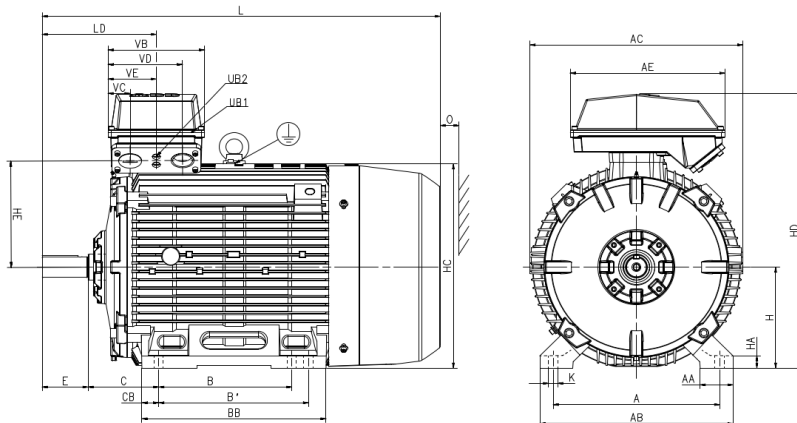
## Dimension drawings

# 机座号 280-355

## Frame size 280-355

底脚安装型电机 IM1001, B3  
Foot-mounted motor IM1001, B3



电机尺寸 Motor size	极数 Poles	A	AA	AB	AC	AE	B	B'	BB	C	CB	D-tol.	DB	E	EG	F(h9)	G
280S	2P	457	75	530	590	348	368	/	477	190	84	65-m6	M20	140	42	18	58
280S	4-12P	457	75	530	590	348	368	/	477	190	84	75-m6	M20	140	42	20	67.5
280SM <sup>(1)</sup>	2P	457	75	530	590	348	368	419	485	190	38	65-m6	M20	140	42	18	58
280SM <sup>(2)</sup>	4-12P	457	75	530	590	348	368	419	485	190	38	75-m6	M20	140	42	20	67.5
280SM <sup>(3)</sup>	2P	457	75	530	590	348	368	419	596	190	47	65-m6	M20	140	42	18	58
280SM <sup>(4)</sup>	4-12P	457	75	530	590	348	368	419	596	190	47	75-m6	M20	140	42	20	67.5
315SM	2P	508	100	590	650	473	406	457	562	216	52	65-m6	M20	140	42	18	58
315SM	4-12P	508	100	590	650	473	406	457	562	216	52	80-m6	M20	170	42	22	71
315ML <sup>(5)</sup>	2P	508	100	590	650	473	457	508	664	216	52	65-m6	M20	140	42	18	58
315ML <sup>(6)</sup>	4-12P	508	100	590	650	473	457	508	664	216	52	80-m6	M20	170	42	22	71
315ML <sup>(7)</sup>	4-12P	508	100	590	650	473	457	508	664	216	52	90-m6	M24	170	50	25	81
315ML <sup>(8)</sup>	2P	508	100	590	650	473	457	508	831	216	59	65-m6	M20	140	42	18	58
315ML <sup>(9)</sup>	4-12P	508	100	590	660	473	457	508	831	216	59	80-m6	M20	170	42	22	71
315ML <sup>(10)</sup>	4-12P	508	100	590	660	473	457	508	831	216	59	90-m6	M24	170	50	25	81
355SM	2P	610	120	700	744	535	500	560	698	254	72	70-m6	M20	140	42	20	62.5
355SM	4-12P	610	120	700	744	535	500	560	698	254	72	100-m6	M24	210	50	28	90
355ML	2P	610	120	700	754	535	560	630	782	254	79.5	70-m6	M20	140	42	20	62.5
355ML	4-12P	610	120	700	754	535	560	630	782	254	79.5	100-m6	M24	210	50	28	90
355LK	2P	610	120	700	754	535	630	710	1035	254	89.5	70-m6	M20	140	42	20	62.5
355LK	4-12P	610	120	700	754	535	630	710	1035	254	89.5	100-m6	M24	210	50	28	90

### 附注 Footnotes

- <sup>1)</sup> IE4 280SMA2; IE3 280SMA2/SMB2; IE2 280SMA2
- <sup>2)</sup> IE5 280SMA8; IE4 280SMA6-8; IE3 280SMA4-8; IE2 280SMA4-6; 280SMB10-12
- <sup>3)</sup> IE5 280SMA2/SMB2; IE4 280SMB2; IE3 280SMC2
- <sup>4)</sup> IE5 280SMA4-6/SMB4-8; IE4 280SMA4/SMB4-6; IE3 280SMB4-8/SMC4-8
- <sup>5)</sup> IE5 315MLA2/MLB2/MLC2/MLD2; IE4 315MLA2/MLB2/MLC2; IE3 315MLA2/MLB2/MLC2; IE2 315MLA2/MLB2/MLC2
- <sup>6)</sup> IE5 315MLA6
- <sup>7)</sup> IE5 315MLA8/MLB6; IE4 315MLA4-8/MLB8; IE3 315MLA4-8/MLB4-8/MLC4; IE2 315MLA4-6/MLB4-6/MLC4; 315MLA10-12
- <sup>8)</sup> IE3 315MLD2/MLE2
- <sup>9)</sup> IE5 315MLA4
- <sup>10)</sup> IE5 315MLB4/MLB8/MLC4-8/MLD4; IE4 315MLB4-6/MLC4; IE3 315MLC6-8/MLD4-8/MLE4

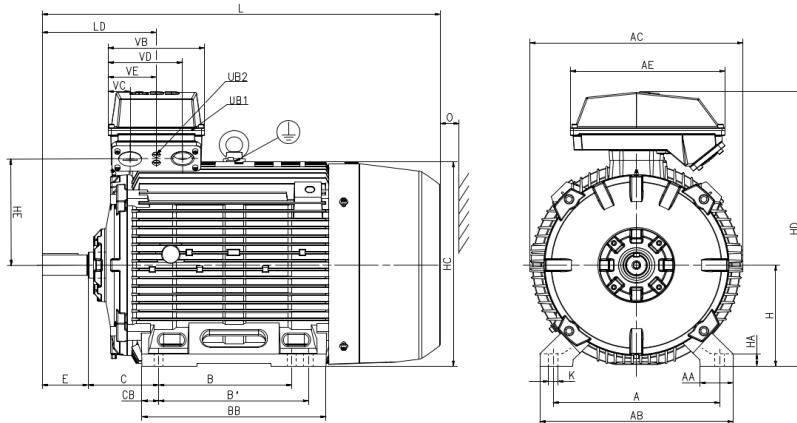
上表给出了主要尺寸 (单位: mm)  
如需图纸详情, 请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB。

Above table gives the main dimensions in mm.  
For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.

# 外形图及外形尺寸 Dimension drawings

# 机座号 280-355 Frame size 280-355

底脚安装型电机 IM1001, B3  
Foot-mounted motor IM1001, B3



电机尺寸 Motor size	极数 Poles	GA	H	HA	HC	HD	HE	K	L	LD	O	UB1	UB2	VB	VC	VD	VE
280S	2P	69	280	31	573	729	306	24	982	342	100	M63x1.5	M20x1.5	230	53	177	115
280S	4-12P	79.5	280	31	573	729	306	24	982	342	100	M63x1.5	M20x1.5	230	53	177	115
280SM <sup>(1)</sup>	2P	69	280	31	573	729	306	24	1052	342	100	M63x1.5	M20x1.5	230	53	177	115
280SM <sup>(2)</sup>	4-12P	79.5	280	31	573	729	306	24	1052	342	100	M63x1.5	M20x1.5	230	53	177	115
280SM <sup>(3)</sup>	2P	69	280	30	573	729	306	24	1182	342	100	M63x1.5	M20x1.5	230	53	177	115
280SM <sup>(4)</sup>	4-12P	79.5	280	30	573	729	306	24	1182	342	100	M63x1.5	M20x1.5	230	53	177	115
315SM	2P	69	315	38	647	857	332	28	1216	348	115	M63x1.5	M20x1.5	295	67.5	227.5	147.5
315SM	4-12P	85	315	38	647	857	332	28	1246	348	115	M63x1.5	M20x1.5	295	67.5	227.5	147.5
315ML <sup>(5)</sup>	2P	69	315	38	647	857	332	28	1327	348	115	M63x1.5	M20x1.5	295	67.5	227.5	147.5
315ML <sup>(6)</sup>	4-12P	85	315	38	647	857	332	28	1357	378	115	M63x1.5	M20x1.5	295	67.5	227.5	147.5
315ML <sup>(7)</sup>	4-12P	95	315	38	647	857	332	28	1357	348	115	M63x1.5	M20x1.5	295	67.5	227.5	147.5
315ML <sup>(8)</sup>	2P	69	315	38	647	857	332	28	1488	348	115	M63x1.5	M20x1.5	295	67.5	227.5	147.5
315ML <sup>(9)</sup>	4-12P	85	315	38	647	857	332	28	1518	378	115	M63x1.5	M20x1.5	295	67.5	227.5	147.5
315ML <sup>(10)</sup>	4-12P	95	315	38	647	857	332	28	1518	348	115	M63x1.5	M20x1.5	295	67.5	227.5	147.5
355SM	2P	74.5	355	41	742	966	396	35	1399	399	130	M75x1.5	M20x1.5	350	95	255	175
355SM	4-12P	106	355	41	742	966	396	35	1469	469	130	M75x1.5	M20x1.5	350	95	255	175
355ML	2P	74.5	355	41	742	966	396	35	1514	399	130	M75x1.5	M20x1.5	350	95	255	175
355ML	4-12P	106	355	41	742	966	396	35	1584	469	130	M75x1.5	M20x1.5	350	95	255	175
355LK	2P	74.5	355	41	742	966	396	35	1678	399	130	M75x1.5	M20x1.5	350	95	255	175
355LK	4-12P	106	355	41	742	966	396	35	1748	469	130	M75x1.5	M20x1.5	350	95	255	175

## 附注 Footnotes

- <sup>1)</sup> IE4 280SMA2; IE3 280SMA2/SMB2; IE2 280SMA2
- <sup>2)</sup> IE5 280SMA8; IE4 280SMA6-8; IE3 280SMA4-8; IE2 280SMA4-6; 280SMB10-12
- <sup>3)</sup> IE5 280SMA2/SMB2; IE4 280SMB2; IE3 280SMC2
- <sup>4)</sup> IE5 280SMA4-6/SMB4-8; IE4 280SMA4/SMB4-6; IE3 280SMB4-8/SMC4-8
- <sup>5)</sup> IE5 315MLA2/MLB2/MLC2/MLD2; IE4 315MLA2/MLB2/MLC2; IE3 315MLA2/MLB2/MLC2; IE2 315MLA2/MLB2/MLC2
- <sup>6)</sup> IE5 315MLA6
- <sup>7)</sup> IE5 315MLA8/MLB6; IE4 315MLA4-8/MLB8; IE3 315MLA4-8/MLB4-8/MLC4; IE2 315MLA4-6/MLB4-6/MLC4; 315MLA10-12
- <sup>8)</sup> IE3 315MLD2/MLE2
- <sup>9)</sup> IE5 315MLA4
- <sup>10)</sup> IE5 315MLB4/MLB8/MLC4-8/MLD4; IE4 315MLB4-6/MLC4; IE3 315MLC6-8/MLD4-8/MLE4

上表给出了主要尺寸 (单位: mm)  
如需图纸详情, 请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB。

Above table gives the main dimensions in mm.  
For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.

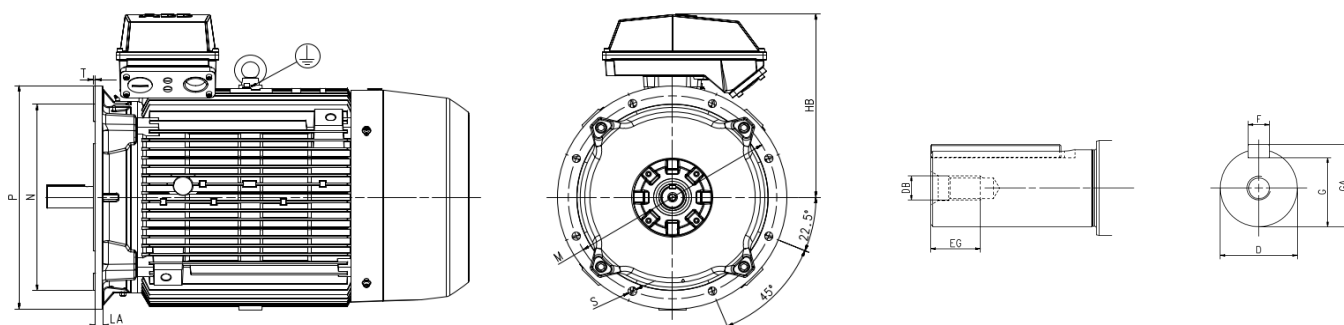
# 外形图及外形尺寸

## Dimension drawings

# 机座号 280-355

## Frame size 280-355

凸缘安装型电机 IM3001, B5  
Flange-mounted motor IM3001, B5



电机尺寸 Motor size	极数 Poles	HB	LA	M	N	P	S	T
280	2P	449	22	500	450-h6	550	18.5	5
280	4-8P	449	22	500	450-h6	550	18.5	5
315	2P	542	22	600	550-h6	660	24	6
315	4-8P	542	22	600	550-h6	660	24	6
355	2P	611	22	740	680-h6	800	24	6
355	4-8P	611	22	740	680-h6	800	24	6

上表给出了主要尺寸（单位：mm）  
如需图纸详情，请访问我们的网页  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) 或联系 ABB。

Above table gives the main dimensions in mm.  
For detailed drawings please see our web-pages  
[www.abb.com/motors&generators](http://www.abb.com/motors&generators) or contact ABB.

# 变量代码

## Variant codes

变量代码 Variant code		M2QA													
		71	80	90	100	112	132	160	180	200	225	250	280	315	355
<b>管理</b> Administration															
530	正常质保期延长 2 年 Two-year extension on standard warranty	●	●	●	●	●	●	●	●	●	●	●	●	●	●
531	海运包装 Sea freight packing	●	●	●	●	●	●	●	●	●	●	●	●	●	●
533	木制海运包装 Wooden sea freight packing	●	●	●	●	●	●	●	●	●	●	●	●	●	●
683	ABB Smart Sensor 支架 Prepared for ABB Ability Smart Sensor	-	-	-	-	-	-	●	●	●	●	●	●	●	●
684	预装 ABB Smart Sensor 硬件 (不含许可码) ABB Ability Smart sensor mounted	-	-	-	-	-	-	●	●	●	●	●	●	●	●
865	延长一年质保 One-year extension on standard warranty	●	●	●	●	●	●	●	●	●	●	●	●	●	●
519	CE 标识 (50Hz) Motor fulfilling European directive and regulations	●	●	●	●	●	●	●	●	●	●	○	○	○	○
100	特殊设计长交期需求 Special design according to quotation (production orders).	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>平衡</b> Balancing															
417	B 级振动 (IEC60034-14) Vibration acc. to Grade B (IEC 60034-14).	●	●	●	●	●	●	●	●	●	●	●	●	●	●
423	无键平衡 Balanced without key.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
424	全键平衡 Full-key balancing	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>轴承与润滑</b> Bearings and Lubrication															
036	轴承运输锁 Transport lock for bearings.	-	-	-	-	-	●	●	●	●	●	●	●	●	●
037	D 端圆柱滚子轴承 Roller bearing at D-end.	-	-	-	-	-	●	●	●	●	●	●	●	●	●
039	耐低温油脂 Cold-resistant grease	●	●	●	●	●	●	●	●	●	●	●	●	●	●
040	耐高温油脂 Heat-resistant grease	●	●	●	●	●	●	●	●	●	●	●	●	●	●
041	通过注油嘴对轴承加油 Bearings regreasable via grease nipples.	-	●	●	●	●	●	●	●	●	●	●	○	○	○
043	SPM 振动测量接头 SPM compatible nipples for vibration measurement	●	●	●	●	●	●	●	●	●	●	●	●	●	●
058	D 端角接触球轴承, 轴向力远离轴承 Angular contact bearing at D-end, shaft force away from bearing.	-	-	-	-	-	-	●	●	●	●	●	●	●	●
059	N 端角接触球轴承, 轴向力指向轴承 Angular contact bearing at N-end, shaft force towards bearing.	-	-	-	-	-	-	●	●	●	●	●	●	●	●
060	D 端角接触球轴承, 轴向力指向轴承 Angular contact bearing at D-end, shaft force towards bearing.	-	-	-	-	-	-	●	●	●	●	●	●	●	●
061	N 端角接触球轴承, 轴向力远离轴承 Angular contact bearing at N-end, shaft force away from bearing.	-	-	-	-	-	-	●	●	●	●	●	●	●	●
107	轴承 Pt100(2 线) Pt100 2-wire in bearings.	-	●	●	●	●	●	●	●	●	●	●	●	●	●
130	轴承安装 Pt100(3 线) Pt100 3-wire in bearings.	-	●	●	●	●	●	●	●	●	●	●	●	●	●
188	D 端 63 系列轴承 63-series bearing in D-end	-	●	●	●	●	●	○	○	○	○	○	○	○	○
372	D 端径向密封反装 Reverse radial seal at D-end, not possible for 2-pole, 280 and 315 frames	●	●	●	●	●	●	●	●	●	●	●	●	●	●
379	SKF 轴承 SKF bearings	●	●	●	●	●	●	●	●	●	●	●	●	●	●
798	不锈钢注油嘴 Stainless steel grease nipples	-	●	●	●	●	●	●	●	●	●	●	●	●	●
866	不锈钢注油嘴 PT1/4" Stainless steel grease nipples, PT1/4"	-	●	●	●	●	●	●	●	●	●	●	●	●	●

○ 标配 | ● 可选 | - 不适用  
 O = Included as standard | ● = Available as option | - = Not applicable

# 变量代码

## Variant codes

变量代码 Variant code	M2QA	71	80	90	100	112	132	160	180	200	225	250	280	315	355
		<b>制动器</b> Brakes													
348	安装指定制动器,3 类价格 Special brake mounted, price category 3	●	●	●	●	●	●	●	●	●	●	-	-	-	-
357	安装指定制动器,1 类价格 Special brake mounted, price category 1	●	●	●	●	●	●	●	●	●	●	●	●	-	-
358	安装指定制动器,2 类价格 Special brake mounted, price category 2	-	-	-	-	-	●	●	●	●	●	●	●	-	-
999C005	AW 系列制动器微动开关 AW Series brake Micro Switch	-	-	-	-	●	●	●	●	●	●	-	-	-	-
999C009	PRECIMA 制动器微动开关 Precima brake Micro Switch	●	●	●	●	●	●	●	●	●	●	-	-	-	-
999C010	PRECIMA 制动器加热带 Precima brake heating element	●	●	●	●	●	●	●	●	●	●	-	-	-	-
999C012	AM 系列制动器微动开关 AM Series brake Micro Switch	-	-	-	-	-	●	●	●	●	●	●	-	-	-
999C013	AM 系列制动器加热带 AM Series brake heating element	-	-	-	-	-	●	●	●	●	●	●	-	-	-
999C018	制动器内走线 cable from inside the motor	-	●	●	●	●	●	●	●	●	●	-	-	-	-
999C040	制动器非标电压, AW 制动器 Non standard brake voltage for AW brake	●	●	●	●	●	●	●	●	●	●	●	●	○	-
999C041	制动器非标电压, AM 制动器 Non standard brake voltage for AM brake	●	●	●	●	●	●	●	●	●	●	●	●	○	-
999C042	制动器非标电压, Precima 制动器 Non standard brake voltage for Precima brake	●	●	●	●	●	●	●	●	●	●	-	-	-	-
999C043	制动器非标扭矩, AW 制动器 Non standard brake torque for AW brake	●	●	●	●	●	●	●	●	●	●	●	○	○	-
999C044	制动器非标扭矩, AM 制动器 Non standard brake torque for AM brake	●	●	●	●	●	●	●	●	●	●	●	○	○	-
999C045	制动器非标扭矩, Precima 制动器 Non standard brake torque for Precima brake	●	●	●	●	●	●	●	●	●	●	-	-	-	-
999C021	调整制动手柄方向 Change the direction of brake handle	●	●	●	●	●	●	●	●	●	●	●	-	-	-
<b>部门标准设计</b> Branch standard designs															
079	转子鼠笼采用硅铝合金, 标明转矩 Silumin-alloy rotor cage.	●	●	●	●	●	●	●	●	●	●	●	-	-	-
142	“马尼拉”绕组接线 Manilla connection.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
178	不锈钢 / 耐酸螺栓 Stainless steel / acid proof bolts.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
209	非标电压或频率 (特殊绕组) Non-standard voltage or frequency, (special winding).	●	●	●	●	●	●	●	●	●	●	●	●	●	●
396	用于环温 -20 °C~-40 °C 的电机, 有加热带 (必须添加代码 450/451) Motor designed for minimum ambient temperature -20 °C to -40 °C, with space heaters (code 450/451 must be added)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
419	纺织风罩, 不带网孔 Textile industry design.	●	●	●	●	●	●	-	-	-	-	-	-	-	-
425	防腐蚀定子和转子 Corrosion protected stator and rotor core.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
584	加强型铸件, 牌号升一档 Cast iron material with increased tensile strenght	●	●	●	●	●	●	●	●	●	●	●	●	●	●
872	ADB210.1 (C5 油漆表面处理) Design for port applications	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>冷却系统</b> Cooling system															
068	轻合金金属风扇 Light alloy metal fan	●	●	●	●	●	●	●	●	●	●	●	●	●	●
075	冷却方式 IC418(无叶无罩) Cooling method IC418 (without fan).	●	●	●	●	●	●	●	●	●	●	●	●	●	●
183*	独立电机冷却 (轴流风扇, N 端) Separate motor cooling (fan axial, N-end).	●	●	●	●	●	●	●	●	●	●	●	●	●	●

○ 标配 | ● 可选 | - 不适用  
○ = Included as standard | ● = Available as option | - = Not applicable

\* 仅适用于 IE4/5 M2QA  
Only applicable to IE4/5 M2QA

# 变量代码

## Variant codes

变量代码 Variant code		M2QA													
		71	80	90	100	112	132	160	180	200	225	250	280	315	355
<b>尺寸图纸</b> Documentation															
141	配二维主要尺寸图 Binding 2D main dimension drawing.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>排水孔</b> Drain holes															
065	塞紧现有排水孔 Plugged existing drain holes.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>加热元件</b> Heating elements															
450	加热带,100-120V Heating element, 100-120 V	●	●	●	●	●	●	●	●	●	●	●	●	●	●
451	加热带,200-240V Heating element, 200 - 240 V	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>绝缘系统</b> Insulation system															
014	H 级绝缘绕组 Winding insulation class H.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
405	用于变频电源的特殊绕组绝缘 Special winding insulation for frequency converter supply.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>安装方式</b> Mounting arrangements															
008	IM 2101 底脚 / 法兰安装, IEC 法兰, 由 IM 1001 派生 (B3 派生出 B34) IM 2101 foot/flange mounted, IEC flange, from IM 1001 (B34 from B3).	●	●	●	●	●	●	-	-	-	-	-	-	-	-
009	IM 2001 底脚 / 法兰安装, IEC 法兰, 由 IM 1001 派生 (B3 派生出 B35) IM 2001 foot/flange mounted, IEC flange, from IM 1001 (B35 from B3).	●	●	●	●	●	●	●	●	●	●	●	●	●	●
047	IM 3601 法兰安装, IEC 法兰, 由 IM 3001 派生 (B5 派生出 B14) IM 3601 flange mounted, IEC flange, from IM 3001 (B14 from B5).	●	●	●	●	●	●	-	-	-	-	-	-	-	-
066	非标安装方式 (请指定 IM xxxx) (除 B3(1001), B5(3001), B14 (3601), IM B35 (2001) & IM B34 (2101) 外的其它安装型式须在定单中注明) Modified for specified mounting position differing from IM B3 (1001), IM B5 (3001), B14 (3601), IM B35 (2001), IM B34 (2101)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
320	IM2001 底脚 / 缺边法兰安装, 由 IM1001 派生 (B3 派生出 B35) IM2001 foot/flat bottom flange mounted, from IM1001 (B35 flat bottom flange from B3)	●	●	●	●	●	●	-	-	-	-	-	-	-	-
622	铸铁轴承内盖 (低窜动) Inner bearing cover of cast iron	●	●	●	●	●	●	●	●	●	●	●	○	○	○
623	大法兰 (C***) Big flange (China)	●	●	●	●	●	-	-	-	-	-	-	-	-	-
<b>涂装</b> Painting															
114	特殊油漆颜色, 标准等级 Special paint color, standard grade	●	●	●	●	●	●	●	●	●	●	●	●	●	●
115	喷漆系统 C4, 中等耐久度 Painting system C4, durability Medium	●	●	●	●	●	●	●	●	●	●	●	●	●	●
168	仅涂底漆 Primer paint only.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
179	特殊油漆要求 (VC114 以外的颜色) Special paint specification.	●	●	●	●	-	-	-	-	-	-	-	-	-	-
383	WF1 户外防中等腐蚀 Outdoor medium anti-corrosion WF1	●	●	●	●	●	●	●	●	●	●	●	●	●	●
646	除 VC114 外的特殊油漆颜色 Special paint colour (China)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
754	喷漆系统 C5, 中等耐久度 Painting system C5, durability Medium	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999F020	WF2 户外防强腐蚀 Outdoor high anti-corrosion WF2	●	●	●	●	●	●	●	●	●	●	●	●	●	●

○ 标配 | ● 可选 | - 不适用  
 ○ = Included as standard | ● = Available as option | - = Not applicable

# 变量代码

## Variant codes

变量代码 Variant code		M2QA													
		71	80	90	100	112	132	160	180	200	225	250	280	315	355
<b>防护</b> Protection															
005	防护罩, 立式电机, 轴伸向下 Protective roof	●	●	●	●	●	●	●	●	●	●	●	●	●	●
072	驱动端径向密封, 不适用于机座号 280、315 的 2 极电机 Radial seal at D-end. Not possible for 2-pole, 280 and 315 frames	●	●	●	●	●	●	●	●	●	●	●	●	●	●
158	防护等级 IP65 Degree of protection IP65.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
250	防护等级 IP66 Degree of protection IP66	●	●	●	●	●	●	●	●	●	●	●	●	●	●
403	防护等级 IP56 Degree of protection IP56.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
784	D 端伽马密封 Gamma-seal at D-end.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999F002	三防电机 (TH) Three-proof motor (TH)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999F006	户外电机 Outdoor design	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999F010	ADB150B 铭牌敲 IP55 ADB150B, IP55	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999F011	ADB150B 铭牌敲 IP56 ADB150B, IP56	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>铭牌和指示牌</b> Rating & instruction plates															
002	重敲铭牌电压、频率、输出、连续工作制 Restamping voltage, frequency and output, continuous duty.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
095	重敲输出 (持续电压、频率)、间歇工作制 Restamping output (maintained voltage, frequency), intermittent duty.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
135	安装额外不锈钢指示牌 轴承与润滑	●	●	●	●	●	●	●	●	●	●	●	●	●	●
163	变频铭牌. 铭牌数据根据报价单 Frequency converter rating plate. Rating data according to quotation.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
181	ABB 标准负载参数, VSD 驱动铭牌. 配变速驱动用附件 Rating plate with ABB standard loadability values for VSD operation. Other auxiliaries for VSD operation to be selected as necessary.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>轴和转子</b> Shaft & rotor															
069	根据基本目录的双伸轴 Two shaft extensions according to catalog drawings.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
070	D 端特殊轴伸, 标准材料 Special shaft extension at D-End, standard shaft material	●	●	●	●	●	●	●	●	●	●	●	●	●	●
164	闭口键槽轴伸 Shaft extension with closed keyway	●	●	●	●	●	●	●	●	●	●	●	●	●	●
410	不锈钢轴 (仅限 SUS304、SUS316) Shaft material stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●
600	N 端特殊轴伸, 标准材料 Special shaft extension at N-end, standard shaft material.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
631	调质轴 Quenched and tempered shaft material	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>定子绕组温度传感器</b> Stator winding temperature sensors															
120	定子绕组安装 KTY 84-130 (每相 1 个) KTY 84-130 (1 per phase) in stator winding.	-	-	-	-	-	-	●	●	●	●	●	●	●	●
121	定子绕组安装双金属温度开关 (NCC, 3 个串联, 130 °C) Bimetal detectors, break type (NCC), (3 in series), 130 °C, in stator winding	●	●	●	●	●	●	●	●	●	●	●	●	●	●
122	定子绕组安装双金属温度开关 (NCC, 3 个串联, 150 °C) Bimetal detectors, break type (NCC), (3 in series), 150 °C, in stator winding	●	●	●	●	●	●	●	●	●	●	●	●	●	●
123	定子绕组安装双金属温度开关 (NCC, 3 个串联, 170 °C) Bimetal detectors, break type (NCC), (3 in series), 170 °C, in stator winding	●	●	●	●	●	●	●	●	●	●	●	●	●	●
125	定子绕组安装双金属温度开关 (NCC, 2x3 个串联, 150 °C) Bimetal detectors, break type (NCC), (2x3 in series), 150 °C, in stator winding	-	●	●	●	●	●	●	●	●	●	●	●	●	●

○ 标配 | ● 可选 | - 不适用

○ = Included as standard | ● = Available as option | - = Not applicable

# 变量代码

## Variant codes

变量代码 Variant code		M2QA													
		71	80	90	100	112	132	160	180	200	225	250	280	315	355
127	定子绕组安装双金属温度开关 (NCC, 3 个串联, 130 °C 以及 3 个串联, 150 °C) Bimetal detectors, break type (NCC), (3 in series, 130 °C & 3 in series, 150 °C), in stator winding	-	●	●	●	●	●	●	●	●	●	●	●	●	●
435	定子绕组安装 PTC- 热敏电阻 (3 个串联), 130 °C PTC - thermistors (3 in series), 130 °C, in stator winding	●	●	●	●	●	●	●	●	●	●	●	●	●	●
436	定子绕组安装 PTC- 热敏电阻 (3 个串联), 150 °C PTC - thermistors (3 in series), 150 °C, in stator winding	●	●	●	●	●	●	●	●	●	●	○	○	○	
437	定子绕组安装 PTC- 热敏电阻 (3 个串联), 170 °C PTC - thermistors (3 in series), 170 °C, in stator winding	●	●	●	●	●	●	●	●	●	●	●	●	●	●
439	定子绕组安装 PTC- 热敏电阻 (2x3 个串联), 150 °C PTC - thermistors (2x3 in series), 150 °C, in stator winding	-	●	●	●	●	●	●	●	●	●	●	●	●	●
441	定子绕组安装 PTC- 热敏电阻 (3 个串联, 130 °C 以及 3 个串联, 150 °C) PTC - thermistors (3 in series, 130 °C & 3 in series, 150 °C), in stator winding	-	●	●	●	●	●	●	●	●	●	●	●	●	●
442	定子绕组安装 PTC- 热敏电阻 (3 个串联, 150 °C 以及 3 个串联, 170 °C) PTC - thermistors (3 in series, 150 °C & 3 in series, 170 °C), in stator winding	-	●	●	●	●	●	●	●	●	●	●	●	●	●
445	定子绕组安装 Pt100(2 线), 每相 1 个 Pt100 2-wire in stator winding, 1 per phase	-	-	-	-	-	-	●	●	●	●	●	●	●	●
446	定子绕组安装 Pt100(2 线), 每相 2 个 Pt100 2-wire in stator winding, 2 per phase	-	-	-	-	-	-	●	●	●	●	●	●	●	●
502	定子绕组安装 Pt100(3 线), 每相 1 个 Pt100 3-wire in stator winding, 1 per phase	-	-	-	-	-	-	●	●	●	●	●	●	●	●
503	定子绕组安装 Pt100(3 线), 每相 2 个 Pt100 3-wire in stator winding, 2 per phase	-	-	-	-	-	-	●	●	●	●	●	●	●	●
<b>接线盒</b> Terminal box															
020	分离式接线盒 Detached terminal box.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
021	左侧接线盒 (从 D 端看) Terminal box LHS (seen from D-end).	-	●	●	●	●	●	●	●	●	●	●	●	●	●
022	电缆进线孔在左侧 (从 D 端看) Cable entry LHS (seen from D-end).	●	●	●	●	●	●	●	●	●	●	●	●	●	●
180	右侧接线盒 (从 D 端看) Terminal box RHS (seen from D-end).	-	●	●	●	●	●	●	●	●	●	●	●	●	●
230	标准金属电缆密封管 Standard metal cable gland.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
373	接线盒防护等级 IP56 Terminal box degree of protection IP56	●	●	●	●	●	●	●	●	●	●	●	●	●	●
375	标准塑料葛兰 Standard plastic cable gland	●	●	●	●	●	●	●	●	●	●	●	●	●	●
376	2 个标准塑料葛兰 Two standard plastic cable glands	●	●	●	●	●	●	●	●	●	●	●	●	●	●
378	不锈钢葛兰 Stainless steel gland	●	●	●	●	●	●	●	●	●	●	●	●	●	●
400	4 x 90 度可转动的接线盒 4 x 90 degr turnable terminal box.	●	●	●	●	●	●	●	●	●	●	●	●	●	-
413	延长电缆连接, 无接线盒 Extended cable connection, no terminal box.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
418	独立的辅助接线盒, 标准材料 Separate terminal box for auxiliaries, standard material.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
468	电缆进口从 D 端 Cable entry from D-end.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
469	电缆进口从 N 端 Cable entry from N-end.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
624	为英制葛兰预留 Prepared for inch cable glands according to BSPP standard.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
730	为 NPT 葛兰预留 Prepared for NPT cable glands.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
731	2 个标准金属电缆密封管 Two standard metal cable glands.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
738	为米制葛兰预留 Prepared for metric cable glands.	●	●	●	●	●	●	●	●	●	●	●	●	●	●

○ 标配 | ● 可选 | - 不适用  
 ○ = Included as standard | ● = Available as option | - = Not applicable

# 变量代码

## Variant codes

变量代码 Variant code		M2QA													
		71	80	90	100	112	132	160	180	200	225	250	280	315	355
740	为 PG 葛兰预留 Prepared for PG cable glands.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999K009	预留非标出线孔 Outdoor high anti-corrosion WF2	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999K016	金属电缆密封管, 定制规格数量 (注明规格与数量) Metal cable glands, custom specification quantity (specify specification and quantity)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999K017	塑料葛兰, 定制规格数量 (注明规格与数量) Plastic cable glands, custom specification quantity (specify specification and quantity)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999K018	EMC 电缆密封管, 定制规格数量 (注明规格与数量) EMC cable gland, custom specification quantity (specify specification and quantity)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>试验 Testing</b>															
145	目录电机的型式试验报告, 400V 50Hz Type test report from a catalogue motor, 400V 50Hz.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
146	指定交货批次内的某一电机的型式试验报告 Type test with report for one motor from specific delivery batch.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
148	出厂试验报告 Routine test report.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
150	客户到厂见证测试 Customer witnessed testing. Specify test procedure with other codes.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
221	指定交货批次的电机型式试验和多点负载测试, 并提交报告 Type test and multi-point load test with report for one motor from specific delivery batch.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
222	指定交货批次的一台电机转矩转速曲线、型式试验和多点负载测试, 并提交报告 Torque/speed test, type test and multi-point load test with report for one motor from specific delivery batch.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
760	振动等级测试 Vibration level test	●	●	●	●	●	●	●	●	●	●	●	●	●	●
762	对指定交货批次内的一台电机进行噪声等级测试 Noise level test for one motor from specific delivery batch.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>变速驱动 Variable speed drives</b>															
479*	安装其它型号的带过渡轴伸脉冲编码器, 不含编码器 Mounting of other type of pulse tacho with shaft extension, tacho not included.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
627*	独立风机非标电压 Non-standard voltage for the separate cooling motor	●	●	●	●	●	●	●	●	●	●	●	●	●	●
628*	安装指定编码器, 4 类价格 Special tacho mounted, price category 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●
658*	安装指定编码器, 1 类价格 Special tacho mounted, price category 1	●	●	●	●	●	●	●	●	●	●	●	●	●	●
659*	安装指定编码器, 2 类价格 Special tacho mounted, price category 2	-	-	-	-	●	●	●	●	●	●	●	●	●	●
660*	安装指定编码器, 3 类价格 Special tacho mounted, price category 3	-	-	-	-	-	-	●	●	●	●	●	●	●	●
692*	镀陶轴 Ceramic coated shaft	-	-	-	-	-	-	-	-	-	-	-	●	●	●
701	N 端绝缘轴承 Insulated bearing at N-end.	-	-	-	-	-	-	-	-	-	-	-	●	●	●
704	EMC 电缆密封管 EMC cable entry.	●	●	●	●	●	●	●	●	●	●	●	●	●	●
999M001*	大连精益超速开关 LY101-XG Dalian Jingyi overspeed switch, LY101-XG	-	-	-	-	-	●	●	●	●	●	●	●	●	●
999M006*	大连精益超速开关 LY101-A Dalian Jingyi overspeed switch, LY101-A	-	-	-	-	-	-	●	●	●	●	●	●	●	●
999M007*	大连精益超速开关 LY101-B Dalian Jingyi overspeed switch, LY101-B	-	-	-	-	-	-	●	●	●	●	●	●	●	●
999M306*	P+F 编码器 ENI90PL-H P+F encoder, ENI90PL-H	-	-	-	-	-	-	●	●	●	●	●	●	●	●

○ 标配 | ● 可选 | - 不适用  
○ = Included as standard | ● = Available as option | - = Not applicable

\* 仅适用于 IE4/5 M2QA  
Only applicable to IE4/5 M2QA

# 通用型电机简介

## General purpose motors in brief

# 机座号 71-132

## Frame size 71-132

电机尺寸 Motor size		71	80	90	100	112	132
机座与端盖 Stator and end shields	材料 Material	铸铁 Cast iron					
	油漆颜色 Paint color shade	Munsell 蓝 8B 4.5/3.25 Munsell blue 8B 4.5/3.25					
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)					
底脚 Feet		一体式铸铁底脚 Integrated cast iron feet					
轴承 Bearings	D 端 D-end	6203-2Z/C3	6204-2Z/C3	6205-2Z/C3	6206-2Z/C3	6207-2Z/C3	6208-2Z/C3
	N 端 N-end	6202-2Z/C3	6204-2Z/C3	6205-2Z/C3	6206-2Z/C3	6206-2Z/C3	6208-2Z/C3
轴向锁定轴承 Axially locked bearings		D 端锁定 Locked at D-end					
轴承密封 Bearing seals	D 端, N 端 D-end, N-end	V 形圈 V-ring					
润滑 Lubrication		封闭式轴承 Bearings greased for life					
铭牌 Rating plate	材料 Material	不锈钢 Stainless steel					
接线盒 Terminal box	接线盒材料 Frame material	铸铁 Cast iron					
	接线盒盖材料 Cover material	铸铁 Cast iron					
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)					
	螺钉 Screws	电镀锌钢 Zinc-electroplated steel					
	螺纹孔 Threaded openings	2xM16	2xM25		2xM32		
连接件 Connections	最大铜线 (Cu) 截面积 (mm <sup>2</sup> ) Max Cu-area mm <sup>2</sup>	4	6		10		
	接线 Terminals	电缆接线头, 6 个端子 Cable lugs, 6 terminals					
风扇 Fan	材料 Material	玻璃纤维增强聚丙烯 Glass-fiber reinforced polypropylene					
风罩 Fan cover	材料 Material	钢板 Steel					
	油漆颜色 Paint color shade	Munsell 蓝 8B 4.5/3.25 Munsell blue 8B 4.5/3.25					
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)					
定子绕组 Stator winding	材料 Material	铜 Copper					
	绝缘 Insulation	F 级绝缘, B 级温升, 除非另有规定 Insulation class F. Temperature rise class B unless otherwise stated					
	绕组保护 Winding protection	可选 As option					
转子绕组 Rotor winding	材料 Material	压铸铝 Pressure die-cast aluminum					
平衡方法 Balancing method		半键平衡 Half-key balancing as standard					
排水孔 Drain holes		排水孔具有可闭合塞, 交付时为打开状态 Drain holes with closable plastic plugs, open on delivery					
键槽 Keyway		开口槽 Open keyway					
防护等级 Enclosure		IP 55					
冷却方式 Cooling method		IC 411					
吊环 Lifting lug		一体式铸铁吊环 Integrated cast iron lifting lug					

# 通用型电机简介

## General purpose motors in brief

# 机座号 160-250

## Frame size 160-250

电机尺寸 Motor size		160	180	200	225	250
机座与端盖 Stator and end shields	材料 Material	铸铁 Cast iron				
	油漆颜色 Paint color shade	Munsell 蓝 8B 4.5/3.25 Munsell blue 8B 4.5/3.25				
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)				
底脚 Feet		一体式铸铁底脚 Integrated cast iron feet				
轴承 Bearings	D 端 D-end	6309-2Z/C3	6310-2Z/C3	6312-2Z/C3	6313-2Z/C3	6315-2Z/C3
	N 端 N-end	6209-2Z/C3	6210-2Z/C3	6212-2Z/C3	6213-2Z/C3	6215-2Z/C3
轴向锁定轴承 Axially locked bearings		D 端锁定 Locked at D-end				
轴承密封 Bearing seals	D 端, N 端 D-end, N-end	V 形圈 V-ring				
润滑 Lubrication		封闭式轴承 Bearings greased for life				
铭牌 Rating plate	材料 Material	不锈钢 Stainless steel				
接线盒 Terminal box	接线盒材料 Frame material	铸铁 Cast iron				
	接线盒盖材料 Cover material	铸铁 Cast iron				
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)				
	螺钉 Screws	电镀锌钢 Zinc-electroplated steel				
	螺纹孔 Threaded openings	2xM40+M16		2xM63+M16		
连接件 Connections	最大铜线 (Cu) 截面积 (mm <sup>2</sup> ) Max Cu-area mm <sup>2</sup>	35		70		
	接线 Terminals	电缆接线头, 6 个端子 Cable lugs, 6 terminals				
风扇 Fan	材料 Material	玻璃纤维增强聚丙烯 Glass-fiber reinforced polypropylene				
风罩 Fan cover	材料 Material	钢板 Steel				
	油漆颜色 Paint color shade	Munsell 蓝 8B 4.5/3.25 Munsell blue 8B 4.5/3.25				
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)				
定子绕组 Stator winding	材料 Material	铜 Copper				
	绝缘 Insulation	F 级绝缘, B 级温升, 除非另有规定 Insulation class F. Temperature rise class B unless otherwise stated				
	绕组保护 Winding protection	可选 As option				
转子绕组 Rotor winding	材料 Material	压铸铝 Pressure die-cast aluminum				
平衡方法 Balancing method		半键平衡 Half-key balancing as standard				
排水孔 Drain holes		排水孔具有可闭合塞, 交付时为打开状态 Drain holes with closable plastic plugs, open on delivery				
键槽 Keyway		开口槽 Open keyway				
防护等级 Enclosure		IP 55				
冷却方式 Cooling method		IC 411				
吊环 Lifting lug		分体式钢制吊环, 通过吊环螺纹连接到机座 Separate steel lifting lug, bolted to the stator				

# 通用型电机简介

## General purpose motors in brief

# 机座号 280-355

## Frame size 280-355

电机尺寸 Motor size		280	315	355
机座与端盖 Stator and end shields	材料 Material	铸铁 Cast iron		
	油漆颜色 Paint color shade	Munsell 蓝 8B 4.5/3.25 Munsell blue 8B 4.5/3.25		
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)		
底脚 Feet		一体式铸铁底脚 Integrated cast iron feet		
轴承 Bearings	D 端 D-end	6316/C3	6316/C3 (2P) 6319/C3 (4-12P)	6319/C3 (2P) 6322/C3 (4-12P)
	N 端 N-end	6316/C3	6316/C3 (2P) 6319/C3 (4-12P)	6319/C3
	轴向锁定轴承 Axially locked bearings	D 端锁定 Locked at D-end		
轴承密封 Bearing seals	D 端, N 端 D-end, N-end	V 形圈 V-ring		
润滑 Lubrication		可润滑轴承 Regreasable bearings		
铭牌 Rating plate	材料 Material	不锈钢 Stainless steel		
接线盒 Terminal box	接线盒材料 Frame material	铸铁 Cast iron		
	接线盒盖材料 Cover material	铸铁 Cast iron		
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)		
	螺钉 Screws	电镀锌钢 Zinc-electroplated steel		
	螺纹孔 Threaded openings	2xM63+2xM20	2xM63+2xM20	2xM75+2xM20
连接件 Connections	最大铜线 (Cu) 截面积 (mm <sup>2</sup> ) Max Cu-area mm <sup>2</sup>	2x150	2x240	4x240
	接线 Terminals	电缆接头, 6 个端子 Cable lugs, 6 terminals		
风扇 Fan	材料 Material	玻璃纤维增强聚丙烯或铝合金 Glass-fiber reinforced polypropylene or Aluminium		
风罩 Fan cover	材料 Material	钢板 Steel		
	油漆颜色 Paint color shade	Munsell 蓝 8B 4.5/3.25 Munsell blue 8B 4.5/3.25		
	防腐蚀等级 Corrosion class	C3 (中等) C3 (medium)		
定子绕组 Stator winding	材料 Material	铜 Copper		
	绝缘 Insulation	F 级绝缘, B 级温升, 除非另有规定 Insulation class F. Temperature rise class B unless otherwise stated		
	绕组保护 Winding protection	定子绕组安装 PTC 热敏电阻 (3 个串联), 150°C PTC - thermistors (3 in series), 150 °C, in stator winding.		
转子绕组 Rotor winding	材料 Material	压铸铝 Pressure die-cast aluminum		
平衡方法 Balancing method		半键平衡 Half-key balancing as standard		
排水孔 Drain holes		排水孔具有可闭合塞, 交付时为打开状态 Drain holes with closable plastic plugs, open on delivery		
键槽 Keyway		开口槽 Open keyway		
防护等级 Enclosure		IP 55		
冷却方式 Cooling method		IC 411		
吊环 Lifting lug		分体式钢制吊环, 通过吊环螺纹连接到机座 Separate steel lifting lug, bolted to the stator		





### ABB中国电机与发电机业务单元区域中心

华东1区区域中心（江苏、安徽及山东）

江苏省南京市建邺区燕山路179号中国人寿大厦15A

邮编: 210019

电话: +86 181 1299 7797

华东2区区域中心（上海、浙江）

上海市闵行区天星路380号

邮编: 200245

电话: +86 181 1617 6178

北方区域中心（北京、天津、河北、河南、山西及内蒙古）

北京市朝阳区酒仙桥北路甲10号401楼

邮编: 100015

电话: +86 181 0119 7623

南方区域中心（广东、广西、福建及海南）

广东省广州市天河区珠江西路15号珠江城大厦29楼

邮编: 510623

电话: +86 181 1617 9306

华中区域中心（湖北、湖南及江西）

湖北省武汉市武昌区临江大道96号武汉万达中心28楼

邮编: 430060

电话: +86 199 0162 9529

西南区域中心（四川、重庆、云南、贵州及西藏）

四川省成都市武侯区人民南路四段3号来福士广场T1

邮编: 610041

电话: +86 181 0819 9063

东北区域中心（黑龙江、吉林及辽宁）

辽宁省沈阳市沈河区青年大街1-1号市府恒隆广场办公楼1座3610-3612单元

邮编: 110063

电话: +86 180 4006 6506

西北区域中心（陕西、宁夏、青海、甘肃及新疆）

陕西省西安市南关正街88号长安国际中心E座1101室

邮编: 710068

电话: +86 199 0162 9363

<http://new.abb.com/motors-generators/zh>

